





# BehavePlus fire modeling system

## Version 3.0

# User's Guide

Patricia L. Andrews  
Collin D. Bevins  
Robert C. Seli

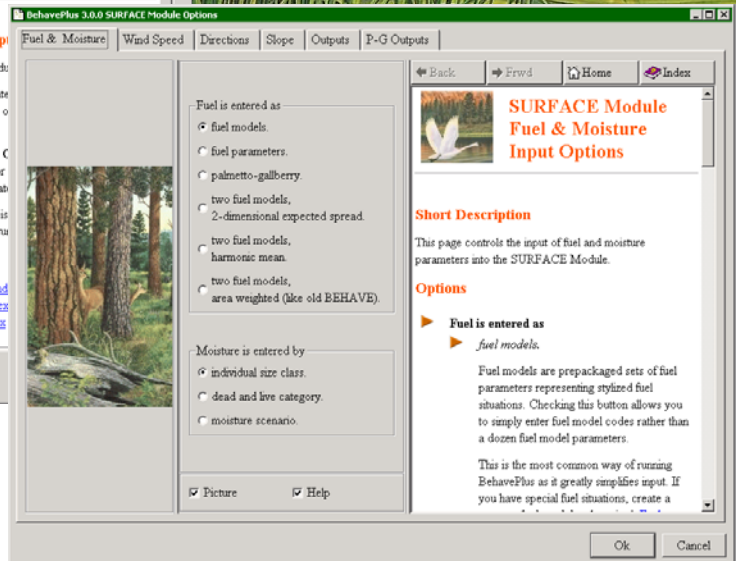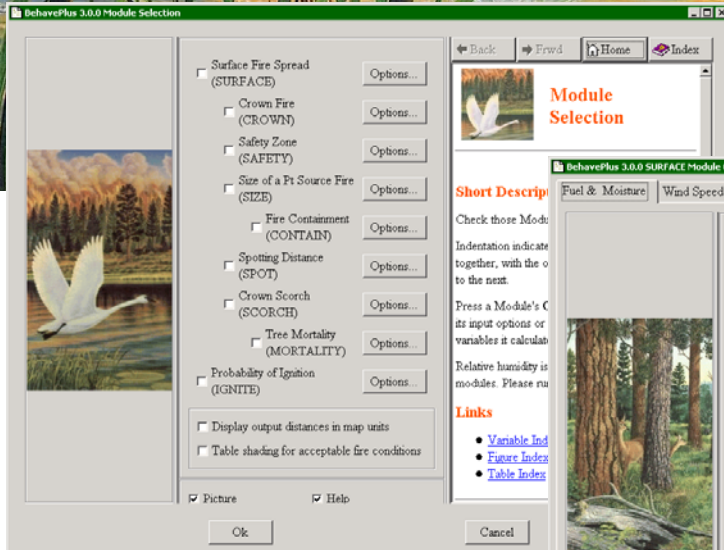

## Abstract

Andrews, Patricia L.; Bevins, Collin D.; Seli, Robert C. 2005. BehavePlus fire modeling system, version 3.0: User's Guide. Gen. Tech. Rep. RMRS-GTR-106WWW Revised. Ogden, UT: Department of Agriculture, Forest Service, Rocky Mountain Research Station. 134p.

This publication has been revised to reflect updates made to version 3 of the BehavePlus software, it was originally published as the BehavePlus fire modeling system, version 2.0 User's Guide in June, 2003

The BehavePlus fire modeling system is a program for personal computers that is a collection of mathematical models that describe fire and the fire environment. It is a flexible system that produces tables, graphs, and simple diagrams. It can be used for a multitude of fire management applications including projecting the behavior of an ongoing fire, planning prescribed fire, and training. BehavePlus is the successor to the BEHAVE fire behavior prediction and fuel modeling system. Primary modeling capabilities include surface fire spread and intensity, crown fire spread and intensity, safety zone size, size of point source fire, fire containment, spotting distance, crown scorch height, tree mortality, wind adjustment factors, and probability of ignition. The User's Guide describes operation of the program. Other papers describe the models and application of the system.

## Keywords

Fire behavior, fire spread, fire intensity, computer program

## The Authors

Patricia L. Andrews is a Research Physical Scientist at the Fire Sciences Laboratory in Missoula, MT. She received a B.A. degree in mathematics and chemistry from Montana State University, Billings in 1970, an M.A. degree in mathematics and computer science in 1973, and a Ph.D. in Forestry in 2005 from the University of Montana, Missoula. She has been at the Fire Sciences Laboratory since 1973, serving as Project Leader of the Fire Behavior Research Work Unit from 1991 to 1996.

Collin D. Bevins is Director of Systems for Environmental Management, a Missoula, MT, nonprofit research and educational organization founded in 1977. Collin earned a B.A. degree from Carleton College, Northfield, MN in 1974, and an M.S. degree in forestry, University of Washington, Seattle, 1975.

Robert C. Seli is a Forester at the Fire Sciences Laboratory in Missoula, MT. He was previously a District Fire Management Officer on the Lolo National Forest, a Silviculturist on the Nezperce National Forest, and received a B.S. degree in forestry from North Carolina State University in 1974.

## Acknowledgments

Funding for development of the BehavePlus program and supporting material was provided by the Joint Fire Science Program; USDA Forest Service, Rocky Mountain Research Station, Fire Behavior Research Work Unit; USDA Forest Service, Fire and Aviation Management, Washington D.C.; and Systems for Environmental Management.

Program development and supporting material was done primarily through contracts #53-0343-7-0020 and #53-0343-0-0011 with Systems for Environmental Management (SEM).

The following SEM people contributed to the project: Collin Bevins (program design and development), Don Carlton (version 1 User's Guide and online help system), Deb Tirmenstein (program testing, document review and editing), Joe Scott (online help and supporting material for the fire models added in versions 2 & 3), Mark Finney (supporting material for the fire models added in version 3) and Miguel Cruz (Portuguese translation for the 'language' option).

Other contributors include Dave Custer (tutorial editing and formatting), Rob Seli (tutorial development, editing, online help, and program testing), and Pat Andrews (project manager, system design, program testing, and tutorial development).

Software technical support is provided by USDA Forest Service, Fire and Aviation Management, National Systems Support Group, Boise, ID.

## Cover Art

"WILDFIRE" (C) 1992, an original acrylic painting by Monte Dolack. Trumpeter swans take refuge in the air as a threatening wildfire rages through the forest habitat. This image is from a 29" x 24" poster commissioned by the National Wildfire Foundation and used here by permission of the artist.

All images used in BehavePlus and its associated manuals and training materials are from original works by Monte Dolack and appear by permission of the artist.

## Preface

This User's Guide explains how to use the BehavePlus fire modeling system software. Other papers will describe the models incorporated into the system and application of the predictions.

This is an RMRS online publication. It can be downloaded from the Rocky Mountain Research Station publications web page, <http://www.fs.fed.us/rm/main/pubs/electronic.html>

You can download this User's Guide and the BehavePlus program and provide comments through the BehavePlus web site, <http://fire.org>

This User's Guide is also an integral part of the BehavePlus system, serving as online help.

This publication has been revised from its original June, 2003 release. It will continue to be updated as features and modeling capabilities are added to the program.

The BehavePlus system is supported by

USDA Forest Service  
National Fire and Aviation Management Information Systems Team  
3833 S. Development Avenue  
Boise, ID 83705  
(800) 253-5559

[fire\\_help@dms.nwccg.gov](mailto:fire_help@dms.nwccg.gov)

## What's New

Version 3 is an upgrade to version 2. Several major new features have been added in version 3.

- Crown fire modeling
- Table shading for acceptable fire conditions (replaces RxWINDOW in BEHAVE)
- Calculating wind adjustment factors
- A expanded set of standard fuel models

A complete list of version 3 changes can be found in Appendix A

---

*The use of trade or firm names in this publication is for reader information and does not imply endorsement by the U.S. Department of Agriculture of any product or service.*

---

This page left blank on purpose.

# Table of Contents

1. Introduction	1
2. Operation	7
2.1. Organization	7
2.2. Design	8
2.3. Features	10
2.4. Installation	11
2.5. Definitions	13
2.6. Menus and Toolbar	13
3. Worksheets	15
3.1. Worksheet layout	15
3.2. Example Worksheets	15
3.3. Worksheet Sections	16
3.4. Loading a previously saved Worksheet	21
3.5. The 0Startup Worksheet	22
3.6. Changing a Worksheet	22
3.7. Saving a Worksheet or a Run	22
4. Modules	23
4.1. Input options	23
4.2. Output Options	24
5. Entering input	27
5.1. Shaded text boxes	27
5.2. Direct entry	27
5.3. Input Guide	27
5.4. Linked input variables	29
6. Table output	31
6.1. Single value calculation	31
6.2. Table output	32
6.3. Two way tables	32
6.4. Table appearance	34
6.5. Multiple pages	34
7. Table Shading	37
7.1. Activating the Table Shading Option	37
7.2. Entering Acceptable Fire Conditions	38
7.3. Viewing Results	39
8. Graph output	41
8.1. Single variable graph	41
8.2. Two variable graph	42
8.3. Axis scales	44
8.4. Graph appearance	49
8.5. Number of curve points	55
9. Diagram output	57
9.1. Wind/slope/spread direction	57
9.2. Fire characteristics chart	61
9.3. Shape of a point source fire	64
9.4. Containment shape	67
10. View, print, & capture results	69
10.1. View size	69

10.2. Pages	69
10.3. Windows	69
10.4. Print	70
10.5. Saving Output	71
11. Error checking	73
12. Fuel models	75
12.1. 13 Standard fuel models	75
12.2. Palmetto-Gallberry fuel option	75
12.3. Expanded set of 40 fuel models	76
12.4. Dynamic fuel models	76
12.5. Custom fuel models	77
13. Moisture scenarios	83
13.1. Using previously saved moisture scenarios	83
13.2. Defining and saving moisture scenarios	85
14. Map applications	87
14.1. Slope from map measurements	87
14.2. Map distances	89
15. Units	91
15.1. English or metric	91
15.2. Custom units set	91
15.3. Number of decimal places	91
15.4. Units conversion tool	92
16. Language	93
16.1. English or Portuguese	93
16.2. Custom language set	94
17. Fine Dead Fuel Moisture Tool	95
17.1. Saving and Documenting	95
18. RH Tool	97
19. Sun-Moon Calendar Tool	99
20. File management	101
20.1. Workspaces	101
20.2. Load a Worksheet	102
20.3. Load a Run	102
20.4. Save as...	102
20.5. Deleting Files & Folders	104
21. Help	105
21.1. Browser pane help	105
21.2. Guide button	105
21.3. User's Guide	106
References	107
Appendix A: Version Comparison	108
Appendix B: Input and Output Variable Tables	111
Appendix C: The 0Startup.bpw worksheet, defaults	120
Appendix D: Example Worksheets	126
Index	129
Command Index	134

# 1. Introduction




The BehavePlus fire modeling system is a PC-based program that is a collection of models that describe fire and the fire environment. It is a flexible system that produces tables and graphs and can be used for a multitude of fire management applications. BehavePlus is the successor to the BEHAVE fire behavior prediction and fuel modeling system (Andrews 1986, Andrews and Chase 1989, Burgan and Rothermel 1984, Andrews and Bradshaw 1990). It is called the BehavePlus fire modeling system to reflect its expanded scope (Andrews and Bevins 1999).



This document describes operation of the BehavePlus program. The fire models and their application are described elsewhere.

Many of the fire models in BehavePlus are the same as those in the *FARSITE* fire area simulator (Finney 1998), NEXUS fire hazard tool, and the FlamMap fire behavior mapping and analysis system. Each system meets a different need. The same surface fire spread model (Rothermel 1972) was used in each case. These three programs and supporting documentation are available through [www.fire.org](http://www.fire.org). Shown below are example outputs from each system.

Sample table, graph, and diagram output from BehavePlus:


Fuel Model	Midflame Wind Speed (upslope)		
	0.0	5.0	10.0
2	2.5	6.5	11.2
5	0.9	2.5	3.8
8	0.6	1.3	2.0

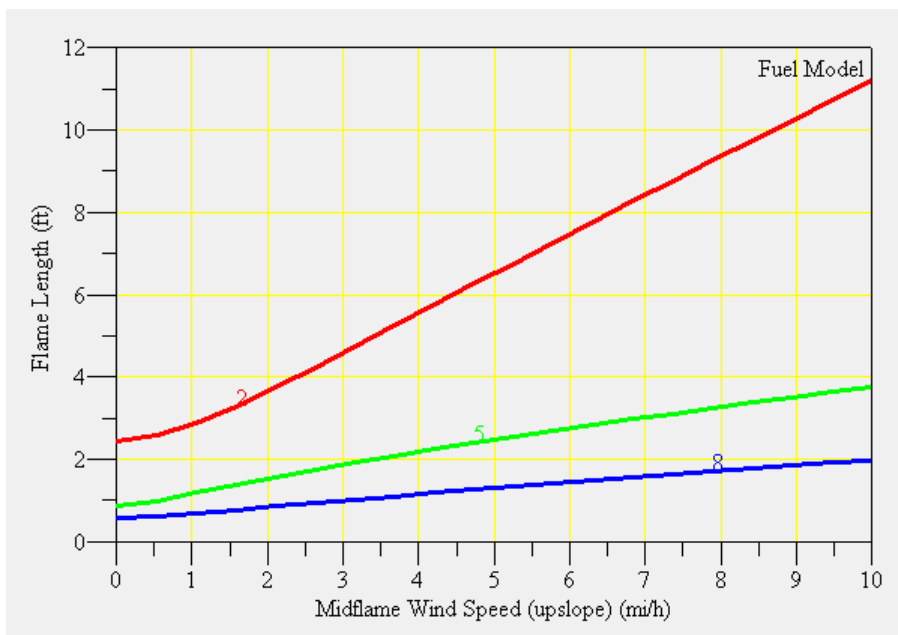

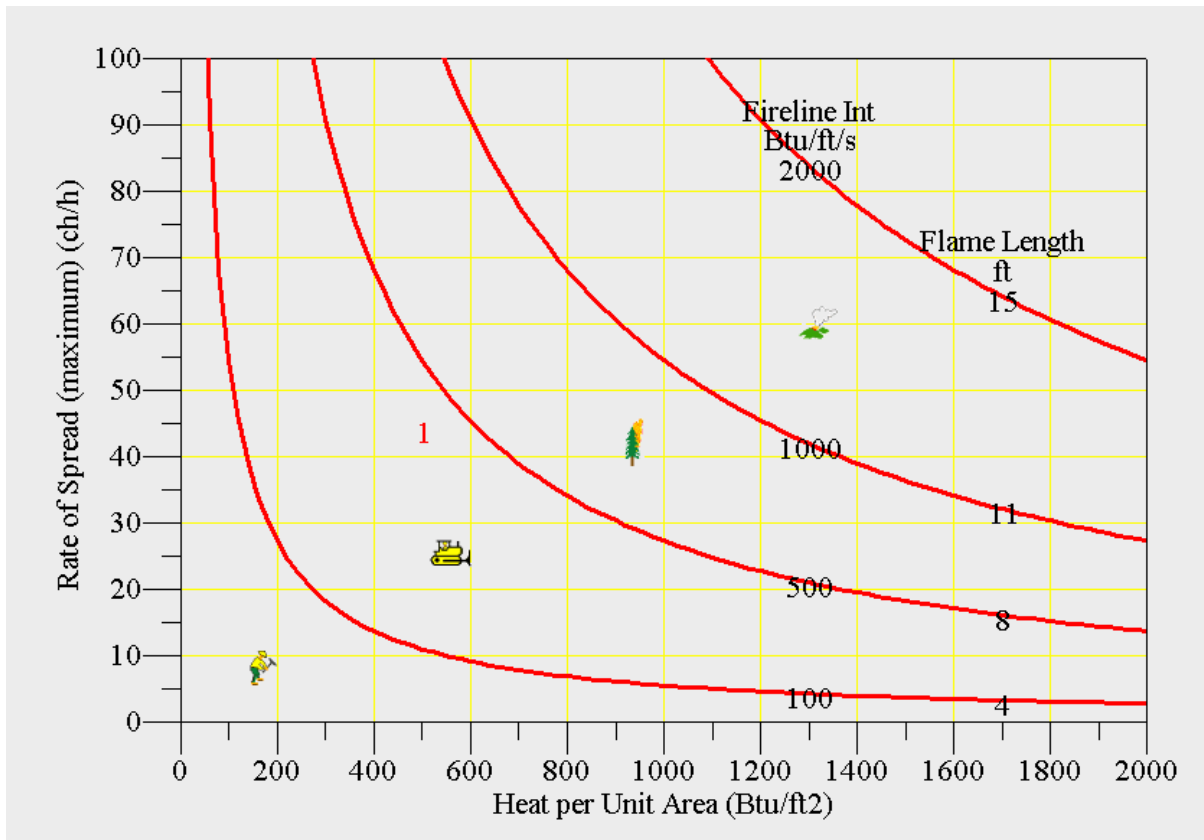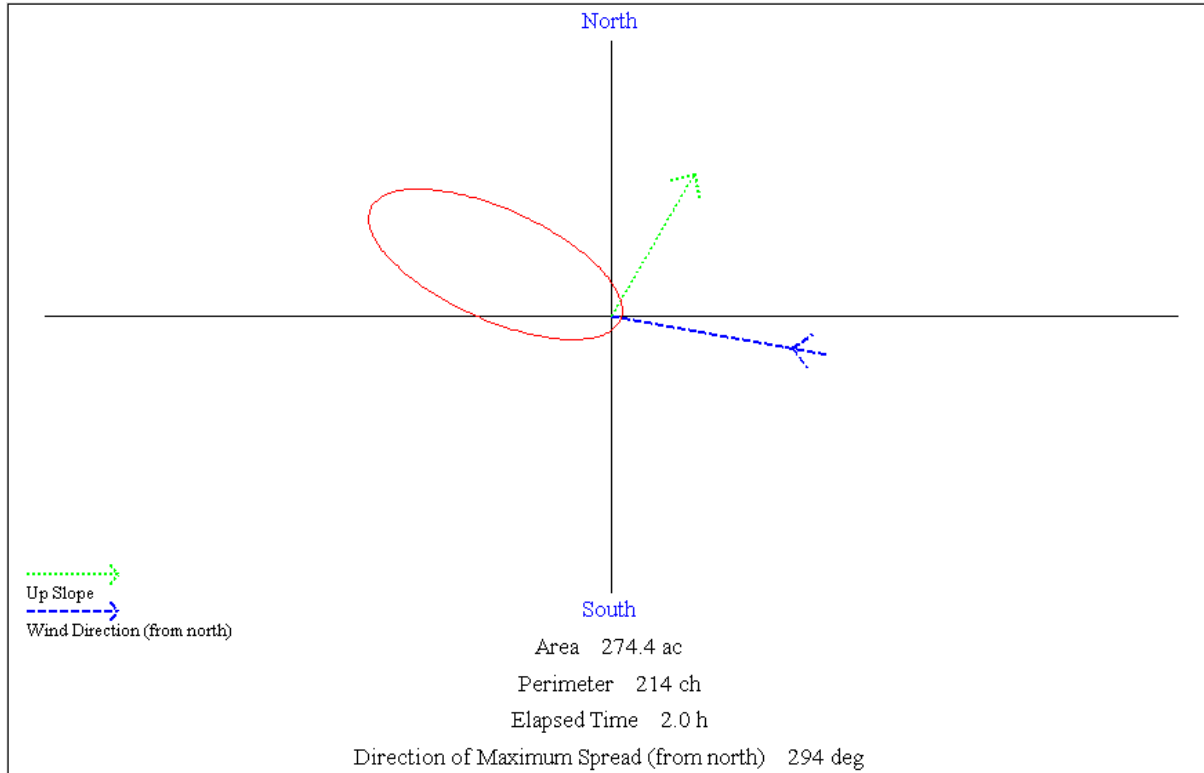




Sample fire perimeter output from FASITE:

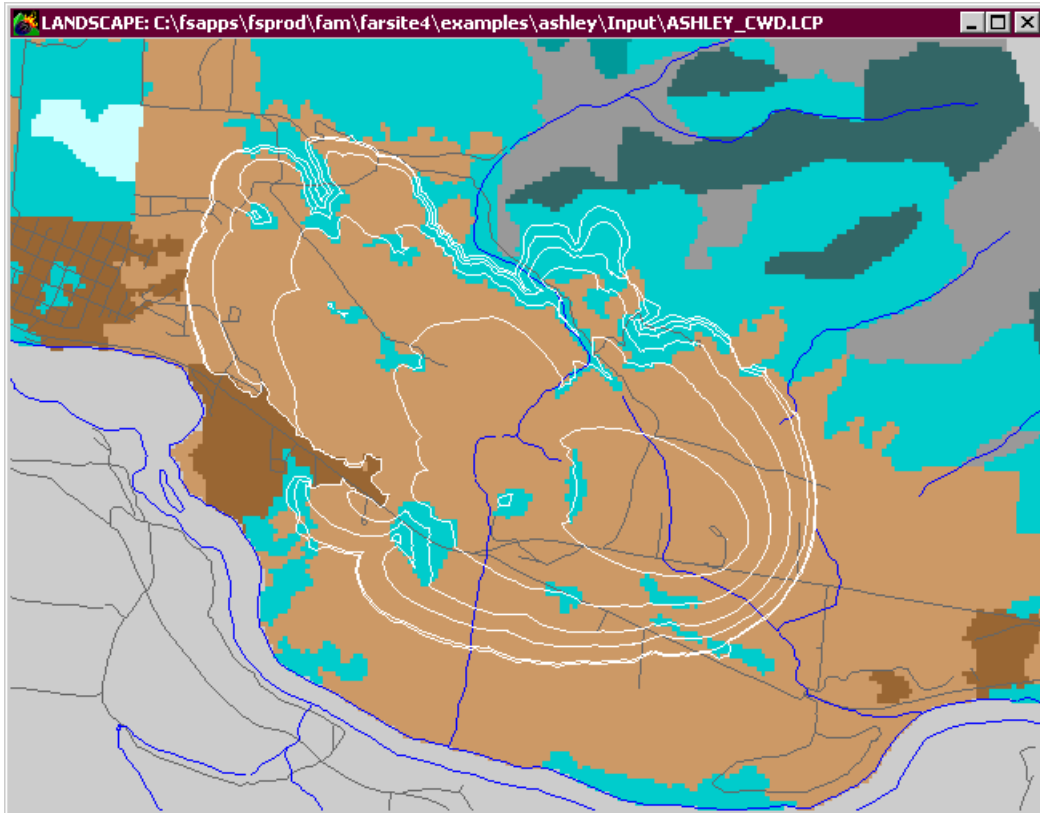

Sample landscape fire potential output from FlamMap:

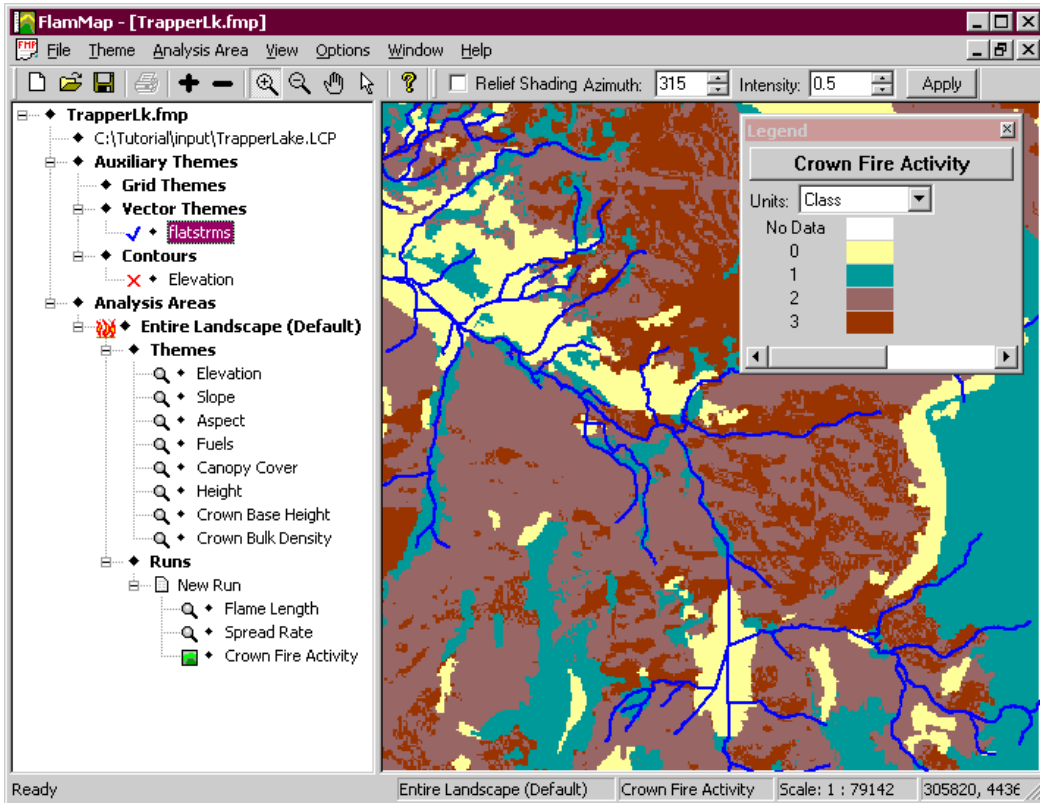

Version 1.0 of BehavePlus was based primarily on the same fire models that composed the old BEHAVE system. Development focus was initially on a new look and feel for the program. This paper describes version 3.0, which provides additional models and features. A summary of versions 3.0 changes is given in Appendix A.

The primary modeling capabilities of BehavePlus, version 3.0, include

- Surface fire spread and intensity
- Safety zone size
- Size of a point source fire
- Fire containment
- Spotting distance
- Crown scorch height
- Tree mortality
- Probability of ignition from fire brands or from lightning
- Transition from surface to crown fire
- Crown fire spread


Other modeling capabilities include

- Tables for fine dead fuel moisture
- Tables for relative humidity or dew point
- Standard and custom fuel models
- Dynamic palmetto-gallberry fuel
- Three methods for weighting two fuel models: two-dimensional expected spread, harmonic mean, area weighted
- Sunrise, sunset, dawn, and dusk at any location or date

Key features include

- Diagrams for point source fire shape, shape of a contained fire, fire characteristics chart, wind / slope / fire directions
- Shading of table output for acceptable fire conditions
- Photographs and a key for the standard 13 fuel models
- Distances in map units
- User control of input options and output variables
- Description of each input and output variable
- User control of units and number decimal places displayed
- Multiple values can be entered for almost any input variable
- User interface language can be changed (currently English and Portuguese)

The help system is an important part of the BehavePlus system. This User's Guide is available with the program for help on operation of the program. In addition, a help browser is available in the dialog boxes providing immediate information on specific operations and definition of input and output variables as shown below.

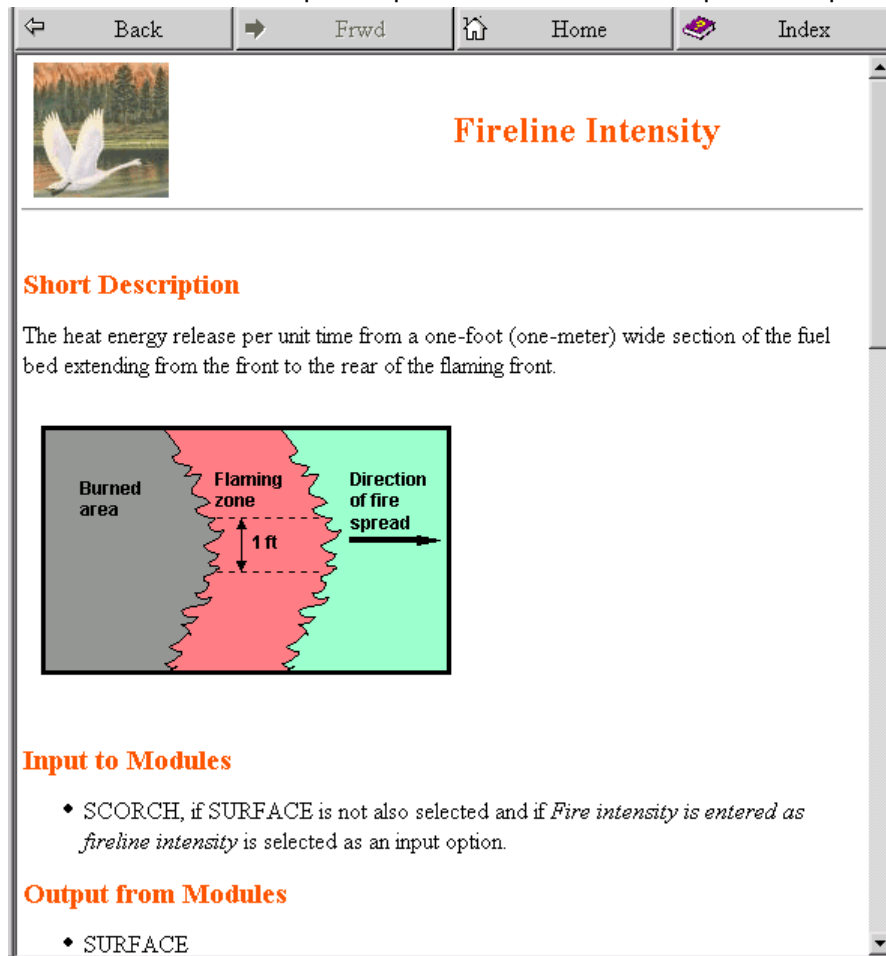


Back Frwd Home Index

## Fireline Intensity

**Short Description**

The heat energy release per unit time from a one-foot (one-meter) wide section of the fuel bed extending from the front to the rear of the flaming front.

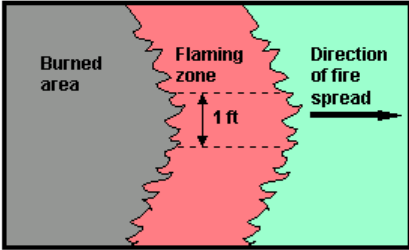

The diagram illustrates a fire front moving from left to right. It is divided into three regions: a gray 'Burned area' on the left, a red 'Flaming zone' in the middle, and a green area on the right. A vertical double-headed arrow in the flaming zone indicates a width of '1 ft'. An arrow labeled 'Direction of fire spread' points to the right.

**Input to Modules**

- ♦ SCORCH, if SURFACE is not also selected and if *Fire intensity is entered as fireline intensity* is selected as an input option.

**Output from Modules**

- ♦ SURFACE

This page blank on purpose.

## 2. Operation

This User's Guide addresses only operation of the program. The fire models, associated variables, and application are described elsewhere.



### 2.1. Organization


Organization of material on Operation of the BehavePlus program is different from the organization of the program itself. It is designed to help you find the answer to a question. Most users are comfortable with looking at menus and dialog boxes and associated information in the program without use of a User's Guide.

This is not a step-by-step operation manual, but a reference guide. The tutorials provide step-by-step instructions.

In describing operation of the program, we use the following font and/or conventions in describing menus, commands, buttons, tabs, and check boxes:


Configure > Module selection > SURFACE > Options... > Fuel & Moisture > fuel models radio button.

For example the sequence of menus, commands, check boxes, buttons, and tabs shown above refers to the following actions in BehavePlus:

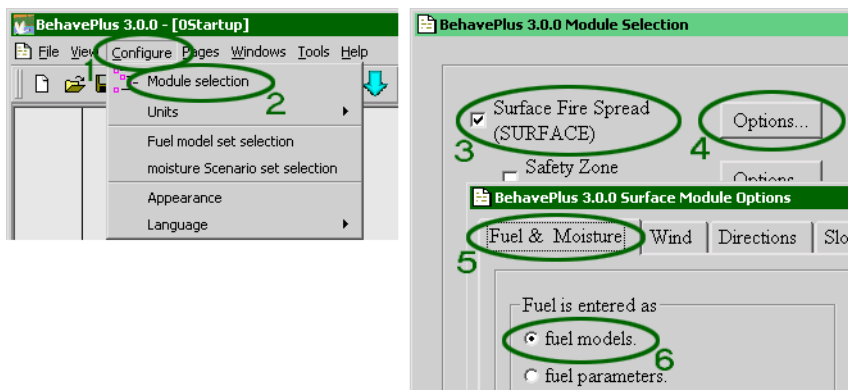



Each of the above elements would be described in this User's Guide as

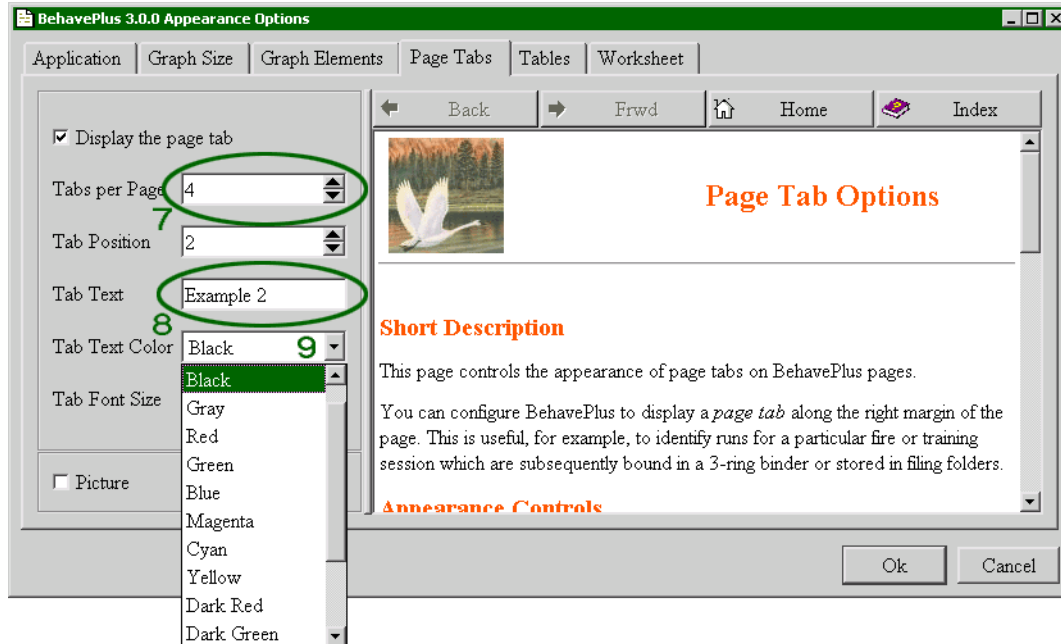1. Configure menu
2. Module selection command
3. SURFACE check box
4. Options... button
5. Fuel & Moisture tab
6. fuel models radio button



Other elements used in BehavePlus include

7. Spin box - select the value using the  buttons or enter a value from the keyboard,
8. Text box - click inside the box to enter values from the keyboard,
9. Drop-down list - Choose the value from the list displayed with the  button.

In the interest of saving space and improving readability, we include screen captures of only the portion of concern. The Tutorials include more complete screen captures.

## 2.2. Design

### 2.2.1. Page Oriented

BehavePlus is meant to be more than just a fire modeling tool. It is meant to be a lesson book with a built-in training manual, and a planning tool whose results may be incorporated into management reports. It is meant to be a fire behavior assessment aid whose tables and graphs can be shared with others in briefings and in written documentation.

Because of these expectations, the BehavePlus user interface is designed around the concept of the standard 8.5 x 11 printed page.

Given input information BehavePlus can generate documentation, diagrams, tables, and graphs. Fortunately, BehavePlus has a variety of methods for saving and displaying your work. Six months later when you need to review the work, the What, How, and Why of each Run is considerably less obscure than it would have been otherwise.

The page on which you enter input information appears first (page 1) and is called the Worksheet. A complex Worksheet may span several pages. Once the Calculate button is pressed, BehavePlus generates additional pages containing output tables, graphs, and diagrams. These too are designed to fit neatly on the printed page. Navigation buttons on the Tool Bar let you move to the first page, last page, next page, or previous page. The Pages menu lets you jump directly to any diagram, table, or graph. The "Print" dialog box lets you print selected pages.

## 2.2.2. Highly Configurable


BehavePlus is meant to be the repository of many current and future models related to fire behavior and effects. These models may have alternate input sets and can produce many output variables. Individual models may be linked together so that outputs from one module automatically become inputs for another module. Input and output variables may have user-specified units of measure. Outputs may be in the form of diagrams, tables, and/or graphs. The language displayed on Worksheets and output pages may be changed.

BehavePlus may be used for fire behavior training, for fire planning, or for real-time fire behavior assessment. It may be used to assess just fire behavior, or just fire effects, or the link between them. It may be used to build custom fuel models, to determine astronomical events, or as a units conversion utility.

## 2.2.3. Self Documenting

The brooding step-brother of configurability is complexity. Because BehavePlus is so highly configurable and may be used by people in various roles for various purposes, it strives to be self-documenting in an attempt to thwart entropy. The input Worksheet automatically documents all Modules in use, all input variables and units of measure, all output variables and units of measure, and pertinent notes on the current configuration. The Worksheet also allows you to enter a Run description (and possibly additional training or fire incident information) and contains a notes field for free-field entry of expository text.

## 2.2.4. User Manual and Help


BehavePlus tries to provide pertinent information to you when you need it the most. The Guide Button  next to each entry field opens a dialog box containing a help browser pane with suggested or valid inputs. The help browser pane describes input and output variables and program operation. The browser provides tables, photographs, and figures to help you select inputs.

In addition, this User's Guide is available as part of BehavePlus with the Help > Program help command.

## 2.2.5. Not Boring

Finally, every attempt has been made to keep BehavePlus from becoming yet another boring program with a gray personality. Just in case all the complexity, configurability, widgets, dialogs, models, diagrams, tables, graphs, browsers, and quirky behavior aren't enough to hold your attention, here and there we've inserted some paintings we rather enjoy to ease our weary eyes.

If you, however, prefer the gray approach, you can eliminate the pictures for the entire session by clearing the Show picture pane check box on the Configure > Appearance > Application tab.

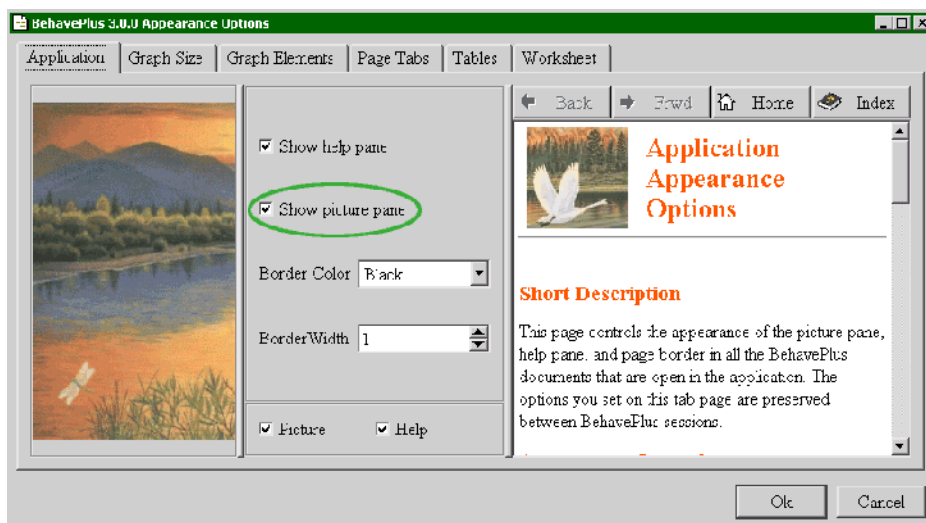

You can also choose to show the art work or not in the dialog boxes with the Picture check box



## 2.3. Features

### 2.3.1. Fire Models

BehavePlus contains models to estimate

- surface fire spread rate, intensity, flame length, scorch height, and direction of maximum spread
- surface fire spread rate, intensity, flame length, and scorch height in any compass direction
- crown fire spread rate, critical thresholds, and fire type
- transition from surface to crown fire
- fire shape, area, and perimeter
- spotting distance from a burning pile, from torching trees, or from a wind-driven surface fire
- success or failure of suppression resources to build line around a fire
- recommended fire safety zone radius, separation distance, and zone size
- fire-induced tree mortality
- probability of fire ignition from firebrands
- probability of fire ignition from lightning strikes
- relative humidity or dew point temperature
- midflame wind speed and wind adjustment factor
- fine dead fuel moisture content
- sun-rise, sun-set, dawn, and dusk at any location or date
- palmetto-gallberry dynamic fuels
- create and save custom moisture scenarios
- weighted fire behavior within a two fuel model complex



## 2.3.2. Operation

BehavePlus has the following operational features:

- BehavePlus is cross-platform and works identically on all versions of Windows and Linux.
- Multiple Worksheets may be open at one time.
- Worksheets may be overlaid, tiled, cascaded, and resized.
- Modules (collections of related fire models) may be individually toggled on/off.
- Modules may have alternate input options available through the Configure > Module selection > Options... > Input Options tab.
- Module output variables can be toggled on/off via the Configure > Module selection > Options... > Output Variables tab.
- Modules may be linked so the outputs from one module are automatically input into another module.
- All distance outputs may be scaled to map units.
- All input and output units of measure may be modified by the user.
- Custom Worksheet configurations may be saved and re-used.
- Custom sets of units of measure may be saved and re-used.
- The Guide Button next to each Worksheet entry field displays a help browser pane with context-specific text and either a list of valid choices (for discrete variables) or fields for generating a range of input values.
- Zero, one, or two input variables may have multiple entry values, producing either a simple result list, a single one-way table, or a multi-page two-way table, respectively.
- If one input variable has multiple entry values, a separate graph can be generated for each output variable. If two input variables have multiple entry values each output variable graph contains a family of curves.
- The SURFACE, SIZE, and CONTAIN Modules can produce diagrams of their results.
- Help > Program help makes this manual and all associated documentation available in PDF format for reading, web browsing, and printing.
- The user interface language may be dynamically changed via Configure > Language. Portuguese (Portugal) is currently available in version 3.0.0. (Contact [cbevins@montana.com](mailto:cbevins@montana.com) if you'd like to volunteer to add support for another language).
- Completed Runs may be saved and re-used.

## 2.4. Installation

### 2.4.1. Download

BehavePlus is available for download from [www.fire.org](http://www.fire.org). Simply follow the BehavePlus links to the download page and select the Windows installation package.

You should check the downloaded file size against the original to ensure you received the entire package. To be absolutely certain the package arrived intact, use the md5sum program from a command line prompt:

```
➤ md5sum bp_3_0_0.exe
```

If the resulting 32-digit hexadecimal number is not identical to the one published on the BehavePlus download page, your download copy is corrupt.

### 2.4.2. System Requirements

BehavePlus has modest system requirements met by the most inexpensive computers available on the market:


- Windows 95, 98, ME, NT, 2000, or XP
- Minimum 800 x 600 video resolution with 256 (8-bit) colors (recommend 1024 x 768 video resolution with 64K (16-bit) colors)
- 16 megabytes of available RAM
- 20 megabytes of disk storage

### 2.4.3. Windows Installation

BehavePlus for Windows is packaged using the Wise Installation System. Simply type the name of the package (e.g., bp\_3\_0\_0.exe) at a command prompt (or click on its name in Windows Explorer) and the installation wizard will guide you through the process. This mostly consists of pressing the OK button.

### 2.4.4. File Structure

BehavePlus has a proscribed file system structure; all files must be located in specific subdirectories. The parent directory of this file structure and all its subdirectories and files are collectively known as a **Workspace**. When BehavePlus is first installed it has a single **Workspace** called "DefaultDataFolder" as shown below.

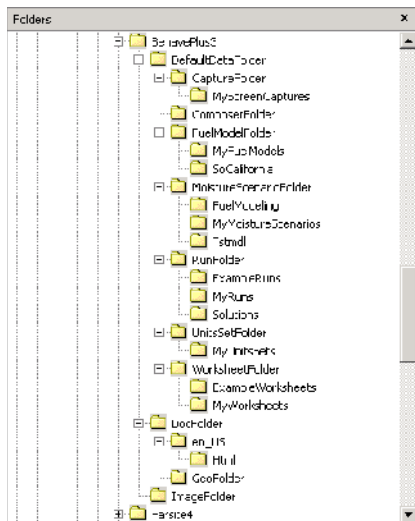

This is the default current **Workspace** every time BehavePlus is started.

We recommend that you use **Workspaces** to aid file management as you apply BehavePlus to several projects. See the section 20.1, **Workspaces**, for more information.

A list of three letter file extensions used by BehavePlus is shown in the following table. These extensions are automatically attached to the files you create in BehavePlus.

File extension	File Type	Folder
.bpf	Custom fuel models	FuelModelFolder
.bpm	Moisture scenarios	MoistureScenarioFolder
.bpr	Runs	RunFolder
.bpu	Custom Unit Sets	UnitsSetFolder
.bpw	Worksheets	WorksheetFolder

## 2.5. Definitions

A Worksheet is the first page or two containing the input Entry Fields. The content of a Worksheet depends upon the specific BehavePlus configuration including module selections, input options, output variables, units of measure, and diagram/table/graph options. Thus there are a large number of possible Worksheets. Some Example Worksheets are supplied with the BehavePlus distribution and are included in every Workspace. You may reconfigure BehavePlus as needed for any purpose, then save its Worksheet for later reuse. Functionally, a Worksheet is a BehavePlus configuration that does not have any input values associated with it.

A Run is a Worksheet that has a complete set of valid inputs, but no outputs are saved in a Run. You must calculate a saved Run to obtain outputs. Any given Worksheet may have an infinite number of Runs, each determined by its input values. Runs may be saved for later use and review. The BehavePlus installation includes Example Runs.

A Model is a set of equations that estimate one or more output variables from one or more input variables. While BehavePlus contains many models, you will more commonly see references to Modules, which are collections of models.

A Fuel Model is a set of numbers describing a fuel bed used by the surface fire spread model.

A Module is a collection of one or more Models that can be activated/deactivated by the user during Worksheet configuration. Selecting the IGNITE Module, for example, includes both the firebrand ignition model and the lightning strike ignition model.

A Continuous Variable is an input or output variable that has a continuous range of values. Continuous variables have a minimum and maximum valid value. Examples include fuel moisture content, and wind speed.


A Discrete Variable has a finite set of valid values. Examples include Fuel Model, Spotting Source Location, and Tree Species.

A Guide Button is the button with the arrow icon next to each Worksheet entry field. Pressing the Guide Button activates an "Input Guide" dialog box containing a help browser pane and input assistance. For continuous variables, the dialog facilitates entry of a large number of inputs by specifying the minimum input value, maximum input value, and increment value. For discrete variables the "Input Guide" dialog box contains a list of all valid inputs from which the user may select zero or more values.











A Workspace is a complete subdirectory tree containing all required BehavePlus files plus any additional Worksheet, Run, Fuel Model, Moisture Scenario, Units Set, or capture files saved by the user. A Workspace corresponds to a single BehavePlus project, and each BehavePlus project should have its own Workspace. Workspaces are created by the File > Workspaces > New workspace and the Files > Workspaces > Clone current workspace commands.

## 2.6. Menus and Toolbar

All BehavePlus operations are available from the menu bar.



The more common operations, such as Module Selection or Calculate, may also be invoked from Toolbar buttons. Toolbar buttons and their equivalent Menu commands are shown below:

Toolbar Buttons	Definitions	Equivalent menu operation
	Open a new Worksheet	File > New
	Open a saved Run	File > Open Run
	Print this Run	File > Print
	Module selection	Configure > Module selection
	Calculate this Run	File > Calculate
	Display first page	Pages > then select page #
	Display last page	Pages > then select page #
	Display previous page	Pages > then select page #
	Display next page	Pages > then select page #
	Access User's Guide	Help > Program help

## 3. Worksheets



A Worksheet is a form on which you enter input. Worksheets vary in appearance and content in response to the current module configuration: a SURFACE module configuration requires different inputs than a SPOT module configuration.

Module selection, input options, and output variable selections determine BehavePlus configuration, which in turn defines the Worksheet appearance and content.

BehavePlus starts with the BasicStart.bpw example Worksheet. This gives the option of doing a quick basic fire behavior Run without having to load or configure a Worksheet.

### 3.1. Worksheet layout


A BehavePlus Worksheet is more than just an input form; it is the primary source of documentation about the Run. Worksheets include the following sections:

**Header** - The Worksheet header shows the BehavePlus version number, useful for reporting bugs and determining if you have the most recent update. The header also includes the date and time of the last calculation and the page number, which lets you collate the correct pages after printing and spreading them out for further study.

**Border** - The line surrounding the Worksheet body may be modified with the Configure > Appearance > Worksheet tab.

**Tabs** - Zero, one, or more page tabs with labels along the right-hand margin of the Worksheet may be activated with the Configure > Appearance > Page Tabs tab.

**Documentation** - This section lists all the currently selected modules and contains an entry field for the Run description. Additional documentation entry fields for training or fire projection applications are optionally activated on the Configure > Appearance > Worksheet tab.

**Input** - This section contains the required input data entry fields identified by a short phrase and their units of measure. Each entry text box also has a Guide  button that may be pressed for input assistance. Entry text boxes are grouped under headings such as "Fuel/Vegetation, Surface/Understory", "Fuel/Vegetation, Overstory", "Fuel Moisture", "Weather", "Terrain", and "Fire".

**Acceptable Fire Conditions** - Used to enter ranges of acceptable fire behavior when using the table shading option. Table shading is enabled by selecting the Configure > Table shading for acceptable fire conditions check box.

**Run Option Notes** - This section documents some of the configuration settings that are selected for the Worksheet.

**Output Variables** - This section lists all the selected output variables and their units of measure. This section may be toggled on/off in the Configure > Appearance > Worksheet tab.

**Notes** - This section permits the user to enter free-field expository text. The user has control of the size of this section or whether it is displayed using the Configure > Appearance > Worksheet tab.

### 3.2. Example Worksheets

A number of predefined example Worksheets are included with the BehavePlus installation in the ExampleWorksheets folder. Descriptions of the example Worksheets are described in Appendix D. You may use these Worksheets as provided, or use them as starting points for your own configuration. Use the File > New command to open an example Worksheet and proceed to change your module selection, input options, and/or output variables as needed. Once BehavePlus is configured the way you want, you may name and save it as a new Worksheet. During subsequent BehavePlus sessions you may load your custom Worksheet and BehavePlus is configured as expected.

Shown below is the SurfaceBasicFrom.bpw example Worksheet:

BehavePlus 3.0.0 Page 1

**Modules: SURFACE**

Description [ ]

**Fuel/Vegetation, Surface/Understory**

Fuel Model [ ]

**Fuel Moisture**

1-h Moisture % [ ]

10-h Moisture % [ ]

100-h Moisture % [ ]

Live Herbaceous Moisture % [ ]

Live Woody Moisture % [ ]

**Weather**

Midlamb Wind Speed mph [ ]

Wind Direction (from north) deg [ ]

**Terrain**

Slope Steepness % [ ]

Aspect (from north) deg [ ]

---

**Run Option Notes**

Calculations are only for the direction of maximum spread [SURFACE].

Fireline intensity, flame length, and spread distance are always for the direction of the spread calculations [SURFACE].

Wind and spread directions are degrees clockwise from north [SURFACE].

Wind direction is the direction from which the wind is blowing [SURFACE].

---

**Output Variables**

Surface Rate of Spread (maximum) (chft) [SURFACE]

Heat per Unit Area (Btu/ft<sup>2</sup>) [SURFACE]

Fireline Intensity (Btu/ft/s) [SURFACE]

Flame Length (ft) [SURFACE]

Direction of Maximum Spread (from north) (deg) [SURFACE]

Max Eff Wind Exceeded? [SURFACE]

(continued on next page)

### 3.3. Worksheet Sections

#### 3.3.1. Page Header

The header of each page includes the version number of the BehavePlus program and the page number. Once a Run is calculated the date and time of the calculation is added. The date and time and page number can be used to correctly collate printed documents.

BehavePlus 3.0.0 Mon, Nov 01, 2004 at 17:13:39 Page 1

#### 3.3.2. Documentation

Documentation is the header information on the Worksheet. The calculation modules that have been selected are listed. Documentation always includes a Description field.

BehavePlus 3.0.0 Page 1

**Modules: SURFACE**

Description [ ]


Fire projection documentation  
 Training documentation


Additional documentation lines can be added by selecting the Fire projection documentation and/or Training documentation check boxes from the Configure > Appearance > Worksheet tab.


Selecting the Fire projection documentation check box adds the following input fields to the Worksheet:


BehavePlus 3.0.0 Page 1

Modules: SURFACE

Description 

Fire Name 


Fire Date & Projection Period 


Fire Analyst 


Selecting the Training documentation check box adds the following input fields to the Worksheet:

BehavePlus 3.0.0 Page 1

Modules: SURFACE

Description 

Training Course 


Training Exercise 

Trainer Name and Date 

Both options can be selected at the same time.


### 3.3.3. Input section

The required input variables and their units are displayed next to their text boxes. Fuel moisture variables that are not required have the text box shaded. In the example below, only 1-h fuel moisture is required for fuel model 1, because the other fuel categories are not included in the fuel model.


The Guide  button for each input variable provides access to definitions and input assistance. Input variables are organized by logical association (rather than by calculation module). A table of all possible input variables by category is given in Appendix B.

BehavePlus 3.0.0 Page 1


Modules: SURFACE


Description 


**Fuel/Vegetation, Surface/Understory**


Fuel Model 


**Fuel Moisture**

1-h Moisture % 


10-h Moisture % 

100-h Moisture % 


Live Herbaceous Moisture % 

Live Woody Moisture % 


**Weather**

Midflame Wind Speed (upslope) mph 

**Terrain**


Slope Steepness % 

### 3.3.4. Input codes

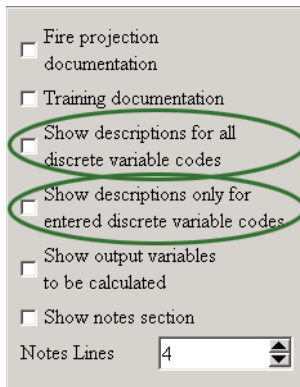


The definition of discrete variable input codes can be displayed by selecting two options on the Configure > Appearance > Worksheet tab. Selecting the Show description for all discrete variable codes check box displays the codes on the Worksheet beneath the variable. The Show descriptions only for entered discrete variable codes check box displays the codes used in the Run on a separate output page when selected.

For example, on the SPOT module with the Show descriptions for all discrete variable codes check box selected, all tree species and spotting source location codes are shown.

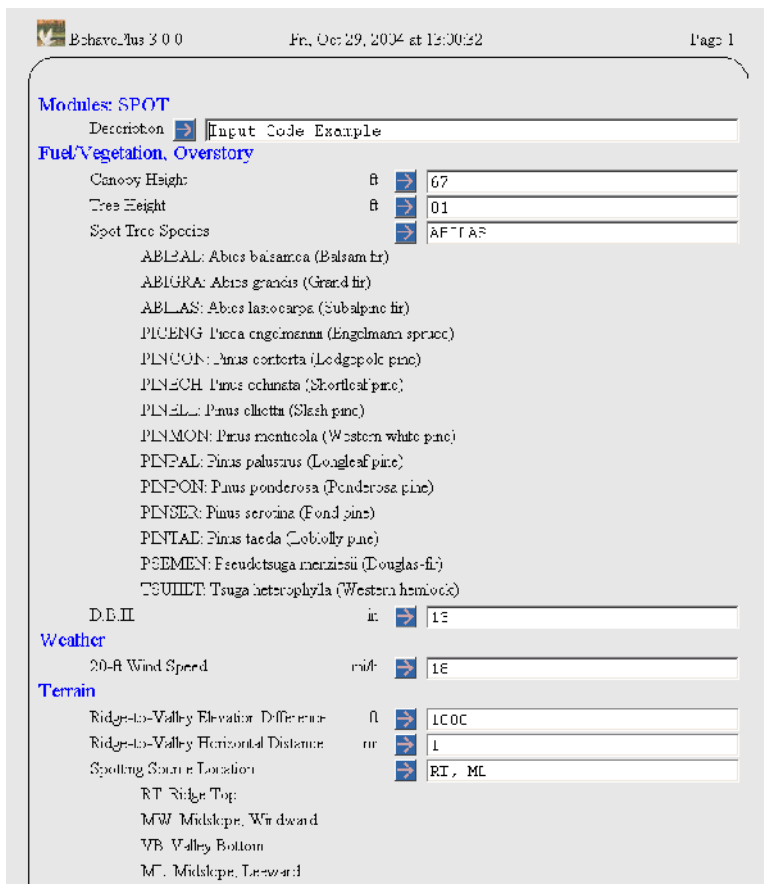




With the Show descriptions only for entered discrete variable codes check box selected a page is generated at the end of outputs listing the codes and descriptions used in the Run.

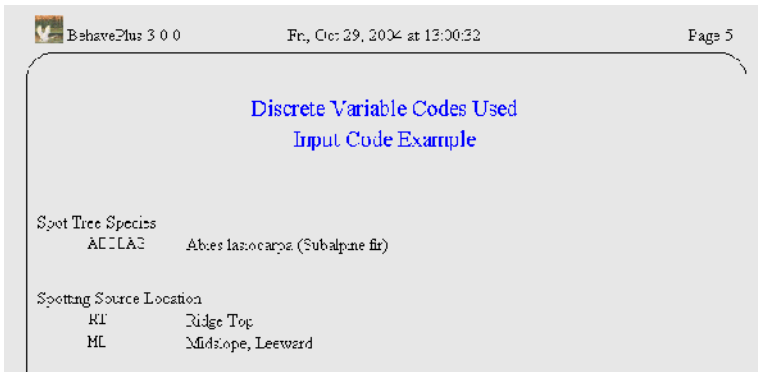

### 3.3.5. Acceptable Fire Conditions


This section is displayed on the Worksheet when the Table shading for acceptable fire conditions check box in the "Module Selection" dialog box is selected.




Acceptable Fire Conditions are fully explained in Chapter 7, Table Shading.

### 3.3.6. Run Option Notes

For clarification, Run options are given after the input variables. The user does not have the option of suppressing this information. The module using the option is also listed in brackets.

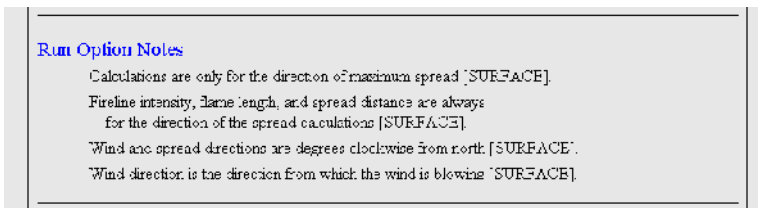


### 3.3.7. Output variables




Selected output variables and their units can be displayed at the end of the input Worksheet using the Configure > Appearance > Worksheet tab. The module calculating the output variable is also listed in brackets.

For example:

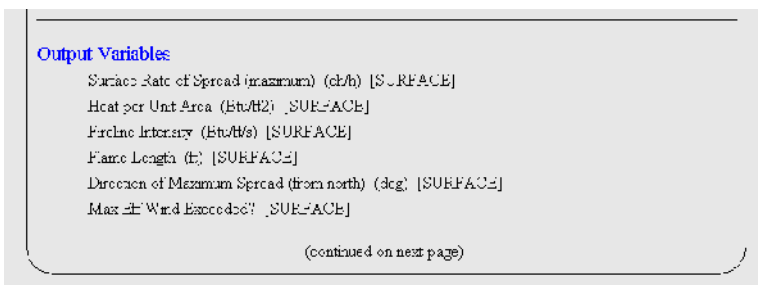


### 3.3.8. Notes

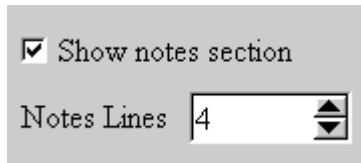

The Notes section of the Worksheet allows the user to enter a large amount of text associated with a Run. The user has the option of changing the number of lines provided for notes or even eliminating the notes section on the Configure > Appearance > Worksheet tab with the Show notes section check box and the Notes Lines spin box.


### 3.3.9. Borders

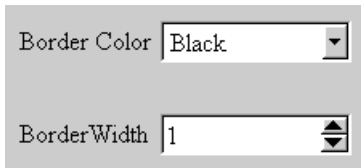

The border color and thickness on the Worksheet and output pages can be changed on the Configure > Appearance > Application tab using the Border Color drop-down list and the Border Width spin box. The border can be eliminated by entering a Border Width of 0.

### 3.3.10. Page Tabs

Page tabs can be displayed along the right margin of the page. This is useful, for example, to identify Runs for a particular fire or training session that are subsequently bound in a three-ring binder or stored in filing folders. Page tabs can be added and defined with the Configure > Appearance > Page Tabs tab.

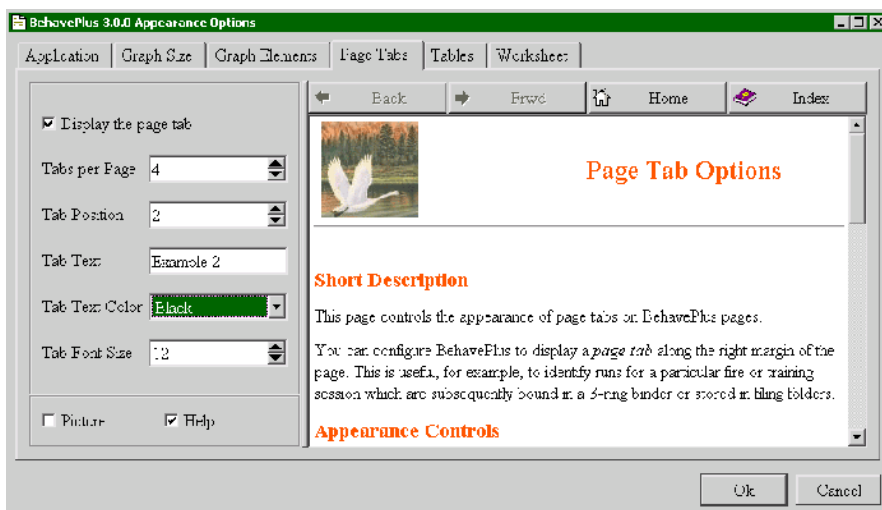

**Tab per page** - The size of the tab depends upon the value selected in this spin box. Only one tab is actually displayed per page. If tabs per page is 4, the displayed tab occupies one-fourth the page height. If it is 10, the displayed tab occupies one-tenth the page height. As this number increases, the displayed tab size decreases.

**Tab position** - Determines the position of the displayed tab. Tab position 1 is always at the upper edge of the right margin.

**Tab text** - The text to appear on the tab. The text is centered within the tab and will therefore be truncated at both ends if it is too long.

**Tab text color** - A color is selected from the drop-down list.

**Tab font size** - Font point size is selected using this spin box.

The above settings create the tab on the Worksheet below:

BehavePlus 3.0.0 Page 1

Modules: SURFACE

Description: [ ]

Fuel/Vegetation, Surface/Understory

Fuel Model: [ ]

Fuel Moisture

1-h Moisture: % [ ]

10-h Moisture: % [ ]

100-h Moisture: % [ ]

Live Herbaceous Moisture: % [ ]

Live Woody Moisture: % [ ]

Weather

Midflame Wind Speed (upslope): m/h [ ]

Terrain

Slope Steepness: % [ ]

Fire

Elapsed Time: h [ ]


Map


Map Representative Fraction (1:n): [ ]

Example2

### 3.4. Loading a previously saved Worksheet

A previously saved Worksheet can be loaded using


- the File > New command,
- or the  toolbar button.

To see the Worksheets in the folder click on the  button to the left of the folder.

To select a Worksheet either

- double click on it,
- or select and click the OK button.

A set of Worksheets is supplied with the program in the "ExampleWorksheets" folder. A short description is given for each. See Appendix D for further description of the "ExampleWorksheets".

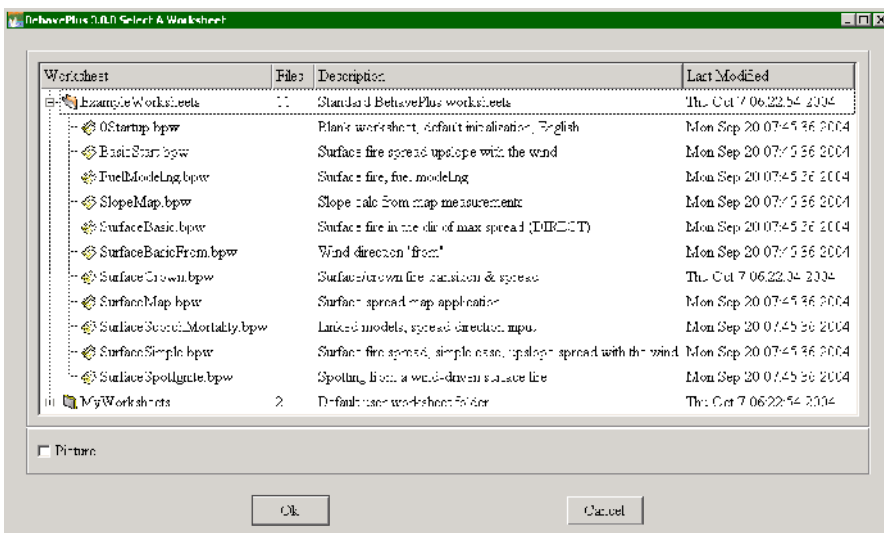

### 3.5. The 0Startup Worksheet

The 0Startup.bpw Worksheet is a special case. It is used as the starting place for selecting calculation modules. It shows no input or output variables, but it sets defaults for all Run settings as described in Appendix C. The 0Startup.bpw Worksheet was used to initialize all of the example Worksheets.

A Worksheet can be designed to meet specific needs by starting with the 0Startup.bpw Example Worksheet, selecting the desired modules, and changing options as needed. The startup Worksheet is named 0Startup.bpw to assure that it is the first selection of the Example Worksheets folder.

### 3.6. Changing a Worksheet

A Worksheet can be changed at any time by changing the selected modules and associated options. The changes are in effect only for the current session unless the revised Worksheet is saved. If a Worksheet that came with the program in the ExampleWorksheets folder is changed, the revised version must be saved in another Worksheet folder.

### 3.7. Saving a Worksheet or a Run

A Worksheet can be saved for later use with the File > saveAs > Worksheet command. The values entered onto the Worksheet are not saved.

Save the Run, which is just a Worksheet with the defined input values, with the File > saveAs > Run command.


See the Section 20.4, Save As, for more specific information.

## 4. Modules

Modules define a set of fire models for a Worksheet. Selection can be made with the Configure > Module command.



The output variables that can be calculated by each module are given in Table 2 of Appendix B.

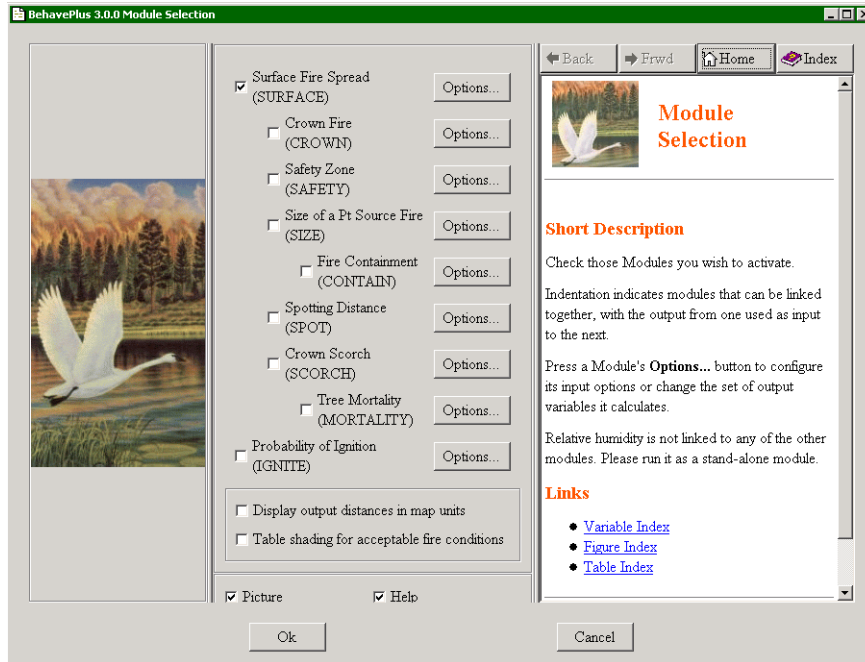


Indentation indicates that the modules can be linked, which means that output from one module is used as input to the other. For example, if both SURFACE and SAFETY are selected, the modules are linked. Output from SURFACE is used as input to SAFETY. If only SAFETY is selected, all required input is entered by the user. A table of input variables and associated modules is given in Table 1 of Appendix B.


Selection of modules, options, and output variables determines the required input variables on the Worksheet. The Options... button is used to configure a module's input options or change the output variables calculated.

### 4.1. Input options


Some modules offer options on alternate ways of specifying input. Others do not. For example, clicking the MORTALITY Options... button displays the "Mortality Module Options" dialog box with the Bark thickness is input option:

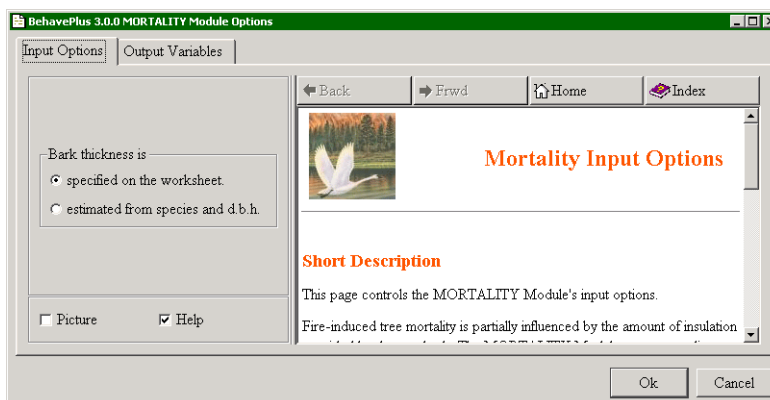


The bark thickness option affects the input variables included on the Worksheet. If Bark thickness is specified on the worksheet is selected, the resulting Worksheet is as follows:

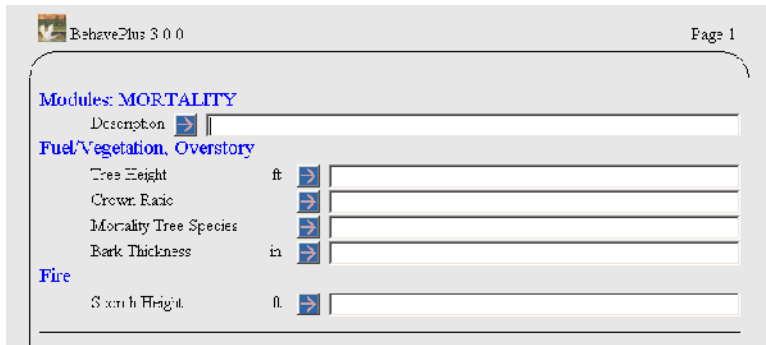

If Bark thickness is estimated from species and d.b.h. is selected, the Worksheet is as follows:

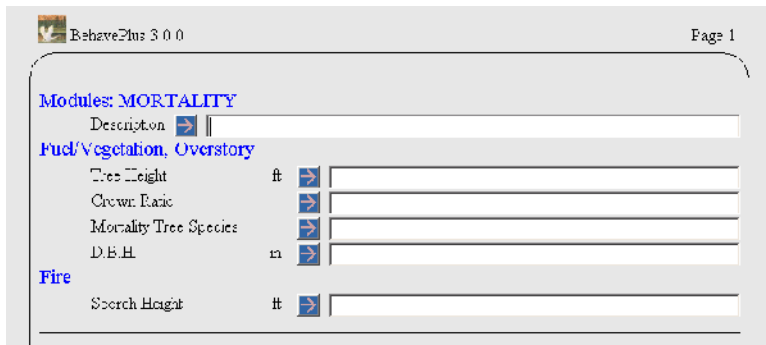


The SURFACE module has many input options. For readability, they are available on several tabs:

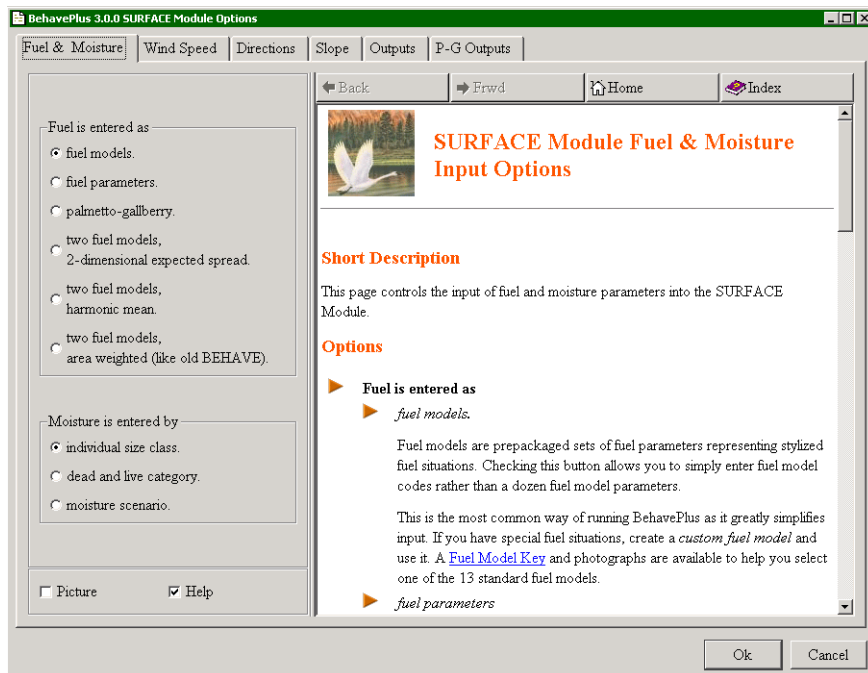

## 4.2. Output Options

The desired output variables are selected through the Options... button associated with each module. The selected output determines the input requirements. For example, input variables for the SPOT Module are different for each spotting source.

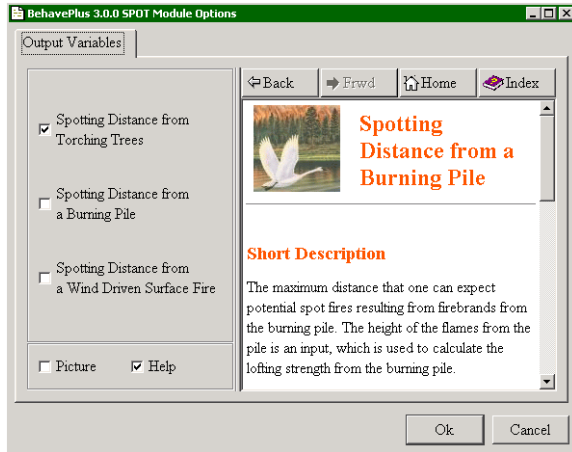

Pause the mouse over the name of an output variable to see its description in the browser pane. For example, a pause over Spotting Distance from a Wind Driven Surface Fire in the SPOT Output Variables tab results in this browser pane.

This page blank on purpose.



## 5. Entering input

There are several ways to input to the BehavePlus program. Values can be typed directly into the input field, choices can be made from a list of valid input values, a range of values can be specified, and for some variables, selecting from a list of common choices.



### 5.1. Shaded text boxes


In some cases, input variables depend on values entered elsewhere on the Worksheet. When an input variable is not required, its text box is shaded. If a value is entered for a shaded text box, it is not used.

### 5.2. Direct entry


Values can be typed directly into the variable text boxes and the Enter or Tab keys moves the cursor to the next field. The cursor can also be moved to any text box with a mouse click. More than one value can be entered for an input variable. Multiple values are separated by a space or comma delimiter. You do not need to always specify equal steps. You can enter several independent values separated by delimiters.

For table output a separate row and/or column will be created for each value from the input variable text box. For graphs of continuous input variables the curve is drawn between the smallest and largest value entered. Graphs of discrete variables will display a separate bar for each input value. See chapter 6, Table output, for more on how multiple values affect outputs.

### 5.3. Input Guide

The “Input Guide” dialog box is opened by clicking the Guide  button to the left of each input variable text box.


#### 5.3.1. Continuous variables

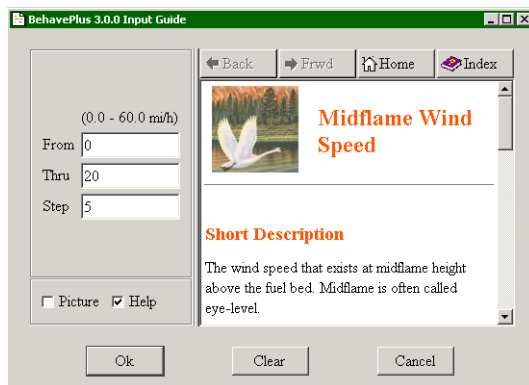

Valid input ranges can be viewed in the “Input Guide” dialog box.

Single values are entered in just the From text box and a second value can be entered in the Thru text box.

For continuous variables the “Input Guide” dialog box allows definition of a range of values by a constant increment. For example, midflame wind speed from 0 to 20 mi/h in steps of 5 enters 0, 5, 10, 15, 20 on the Worksheet as shown below.

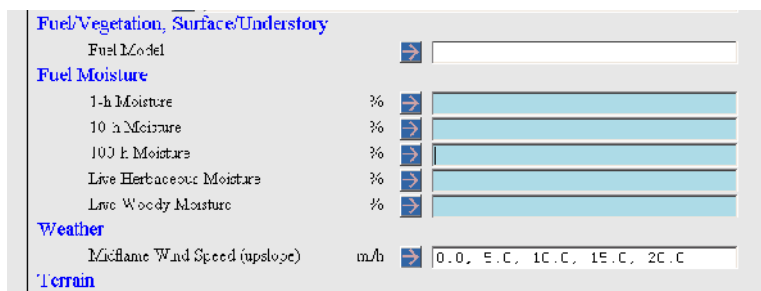


You can also enter a decreasing range with a negative step. This is useful when you have two input variables, such as wind and fuel moisture, that have opposite effect on fire behavior

### 5.3.2. Discrete variables


When the Guide button is clicked for a discrete variable, the allowed selections are given in the center pane of the "Input Guide" dialog box.

Clicking the values selects them; you can select several values. This example shows the fuel model "Input Guide" dialog box. The OK button enters the selected fuel models on the Worksheet.

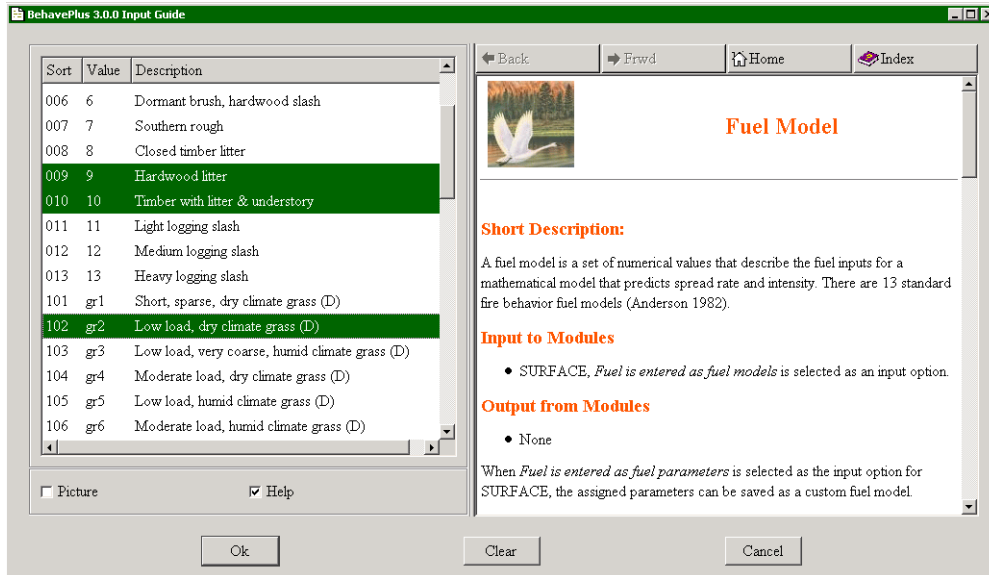


### 5.3.3. Choices button

Although any value in the valid range can be entered for a continuous variable, in some cases common values can be entered with the Choices button.

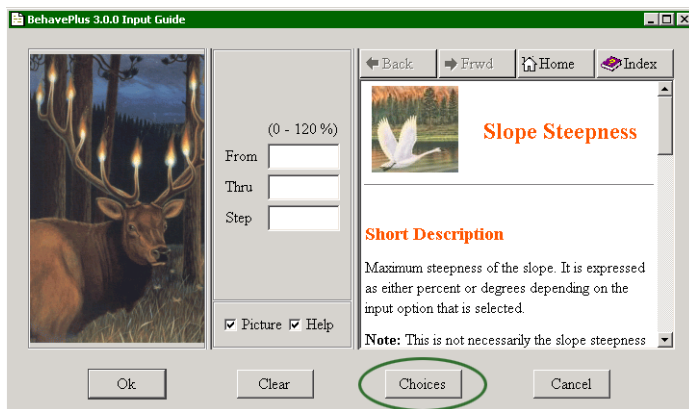



When available on the "Input Guide" dialog box, clicking the Choices button displays commonly used values.

After selecting values in the “Slope Steepness” dialog box, clicking Ok enters them on the Worksheet.

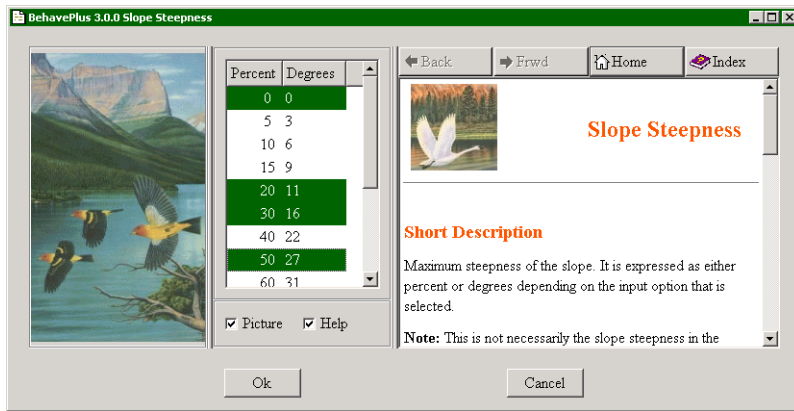

### 5.4. Linked input variables


When using the CONTAIN module, with the multiple resources input option selected some, input variables are directly associated with each other (an exception to the general BehavePlus rule). For example, a line production rate, arrival time, and duration are assigned to each resource. Linked input variables also allow you to enter multiple values for more than two input variables. In the following example, although multiple values are assigned to several input variables, those variables are linked together, so only a single calculation is done.

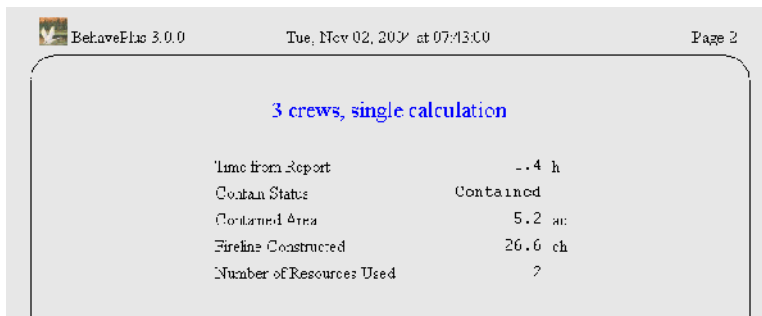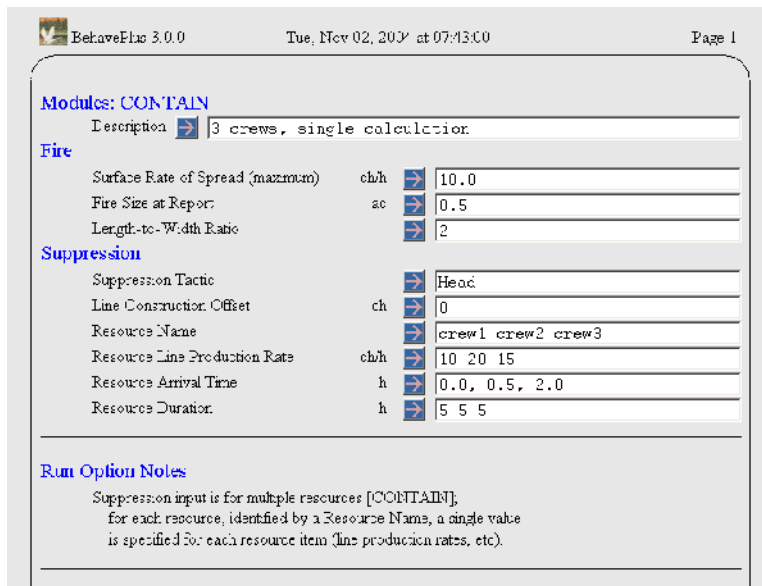

This page blank on purpose.



## 6. Table output

When more than one value is assigned to one or two input variables, table output is produced. Tables are produced by selecting the Display table results check box in the "Calculate Results" dialog box that displays after selecting a File > Calculate command.

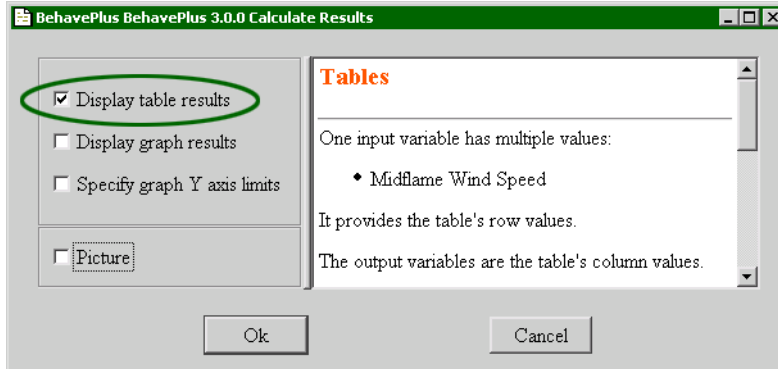



### 6.1. Single value calculation

When each variable is assigned only one value, a simple list of output is given. No table or graph is possible. For example:

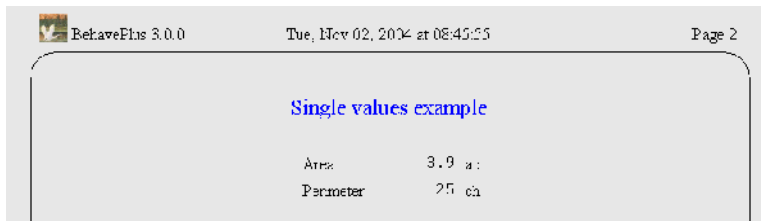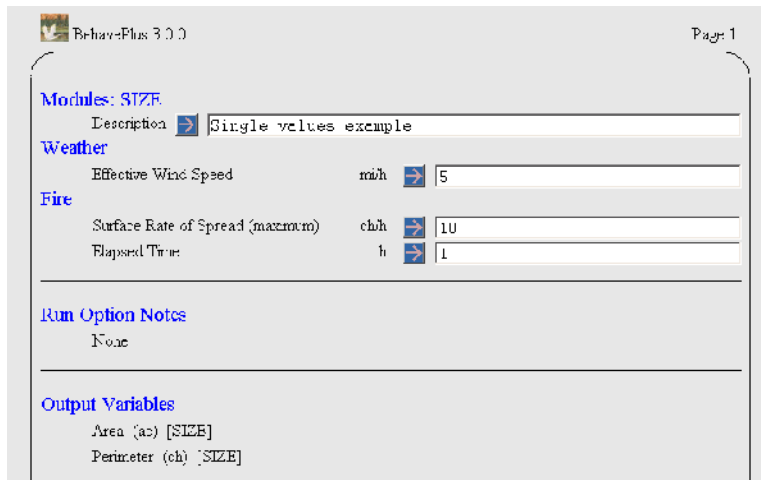



### 6.2. Table output

When more than one value is assigned to a variable, table output is produced. Each output variable is a specified column. For example, these multiple Rate of Spread inputs produce the page 2 table below:

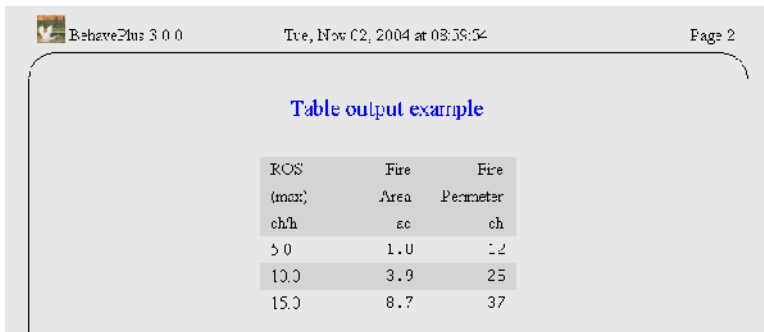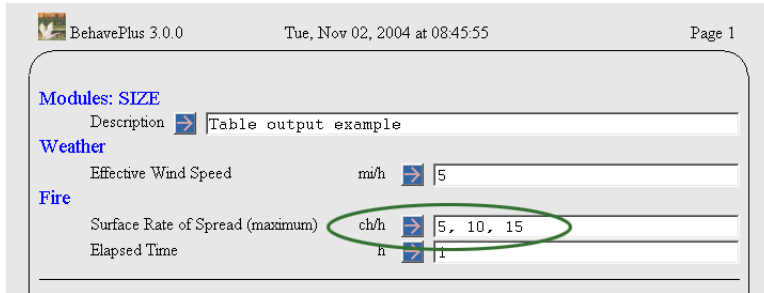

### 6.3. Two way tables

When more than one value is assigned to two variables, a two way table is produced. A table is produced for each selected output variable. Either variable can be specified as the row variable in the "Calculate Results" dialog box.

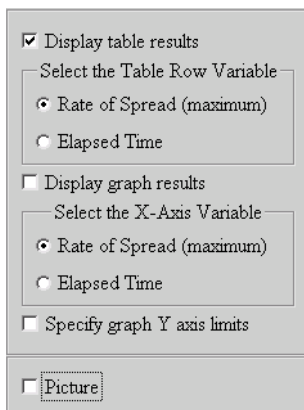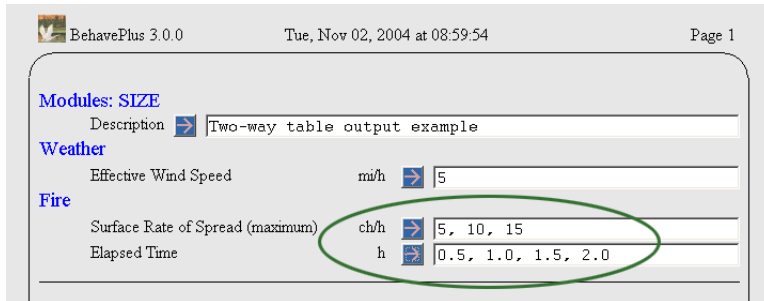

For example, with the above inputs this dialog box appears when you Calculate the Run.

After selecting the Rate of Spread (maximum) option button and clicking the Ok button, the following tables are produced:

BehavePlus 3.0.0 Tue, Nov 02, 2004 at 09:48:36 Page 2

**Two-way table output example**  
**Area (ac)**

ROS (max)	Elapsed Time			
	h			
ch/h	0.5	1.0	1.5	2.0
5.0	0.2	1.0	2.2	5.9
10.0	1.0	3.9	8.7	15.5
15.0	2.2	8.7	19.7	35.0

BehavePlus 3.0.0 Tue, Nov 02, 2004 at 09:48:36 Page 3

**Two-way table output example**  
**Perimeter (ch)**

ROS (max)	Elapsed Time			
	h			
ch/h	0.5	1.0	1.5	2.0
5.0	6	12	19	25
10.0	12	25	37	50
15.0	19	37	56	71

Display table results

Select the Table Row Variable

Rate of Spread (maximum)

Elapsed Time

Display graph results

Select the X-Axis Variable

Rate of Spread (maximum)

Elapsed Time

Specify graph Y axis limits

Picture

Changing the Table Row Variable to the Elapsed Time option button swaps the table columns and rows produces the following tables:


BehavePlus 3.0.0 Tue, Nov 02, 2004 at 09:59:42 Page 2

**Two-way table output example**  
**Area (ac)**

Elapsed Time	Surface Rate of Spread (maximum)		
	ch/h		
h	5.0	10.0	15.0
0.5	0.2	1.0	2.2
1.0	1.0	3.9	8.7
1.5	2.2	8.7	19.7
2.0	3.9	15.5	35.0

### 6.4. Table appearance

Table row shading can be enabled with the Configure > Appearance > Tables tab.

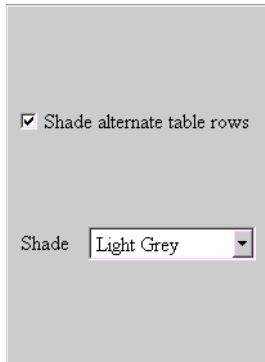


Selecting the Shade alternate table rows check box causes all output tables to have alternating rows shaded with a background color. This may improve the readability of wide tables. If the check box is cleared, tables are displayed without any row background color.

The table row background color is selected from the Shade drop-down list.


This table appearance option is used to improve table readability, don't confuse it with the Table shading for acceptable fire conditions output option. See chapter 7, Table shading, for more information.

### 6.5. Multiple pages

There is essentially no limit on the number of values that can be assigned to an input variable. But the resulting table might not fit on a single page. For example, if rate of spread is calculated for values from 2 to 30 in steps of 2, and elapsed time is specified as the row variable, the table overlaps onto 3 pages.

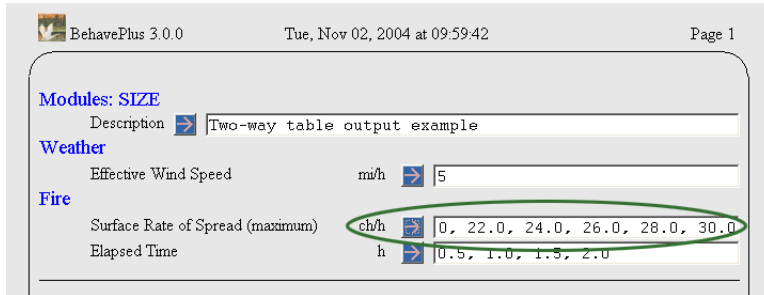

The > or < symbols lined to the right and/or left of the table heading indicates that there are additional results for those variables in the indicated direction.

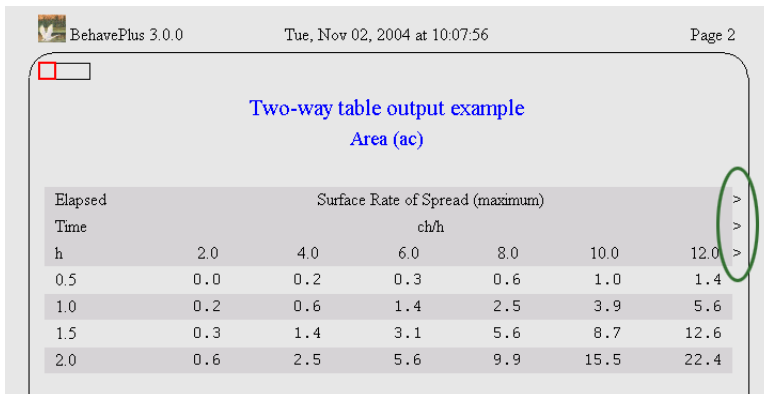



BehavePlus 3.0.0 Tue, Nov 02, 2004 at 10:07:56 Page 3

Two-way table output example  
Area (ac)

Elapsed Time h	Surface Rate of Spread (maximum) ch/h					
0.5	1.9	2.5	3.1	3.9	4.7	5.6
1.0	7.6	9.9	12.6	15.5	18.8	22.4
1.5	17.1	22.4	28.3	35.0	42.3	50.3
2.0	30.5	39.8	50.3	62.2	75.2	89.5

BehavePlus 3.0.0 Tue, Nov 02, 2004 at 10:07:56 Page 4

Two-way table output example  
Area (ac)

Elapsed Time h	Surface Rate of Spread (maximum) ch/h		
0.5	6.6	7.6	8.7
1.0	26.3	30.5	35.0
1.5	59.1	68.5	78.7
2.0	105.0	121.8	139.9

The box diagram at the upper left of the pages shows the relative position of the currently viewed page in the multi-page table.

In this example, however, it would make more sense to specify rate of spread as the row variable since it produces a table that fits on a single page as shown below:

BehavePlus 3.0.0 Tue, Nov 02, 2004 at 11:44:29 Page 2

Two-way table output example  
Area (ac)

ROS (max) ch/h	Elapsed Time h			
	0.5	1.0	1.5	2.0
2.0	0.0	0.2	0.3	0.6
4.0	0.2	0.6	1.4	2.5
5.0	0.3	1.4	3.1	5.6
8.0	0.6	2.5	5.6	9.9
10.0	1.0	3.9	9.7	15.5
12.0	1.4	5.6	12.6	22.4
14.0	1.9	7.6	17.1	30.5
16.0	2.5	9.9	22.4	39.8
18.0	3.1	12.6	28.3	50.3
20.0	3.9	15.5	35.0	62.2
22.0	4.7	18.8	42.3	75.2
24.0	5.6	22.4	50.3	89.5
26.0	6.6	26.3	59.1	105.0
28.0	7.6	30.5	68.5	121.8
30.0	8.7	35.0	78.7	139.9

This page left blank on purpose.


# 7. Table Shading




Table shading for acceptable fire conditions is designed to display the conditions that contribute to acceptable fire behavior, such as in developing a prescribed fire prescription. It replaces the RXWINDOW program of the old BEHAVE system. RXWINDOW attempted to reverse the calculations to determine conditions that corresponded to specified fire conditions. As additional fire models have become available, this approach is unfeasible. The approach taken in BehavePlus is different from that in RXWINDOW.

## 7.1. Activating the Table Shading Option

To implement the table shading option select the Table shading for acceptable fire conditions check box in the “Module Selection” dialog box.

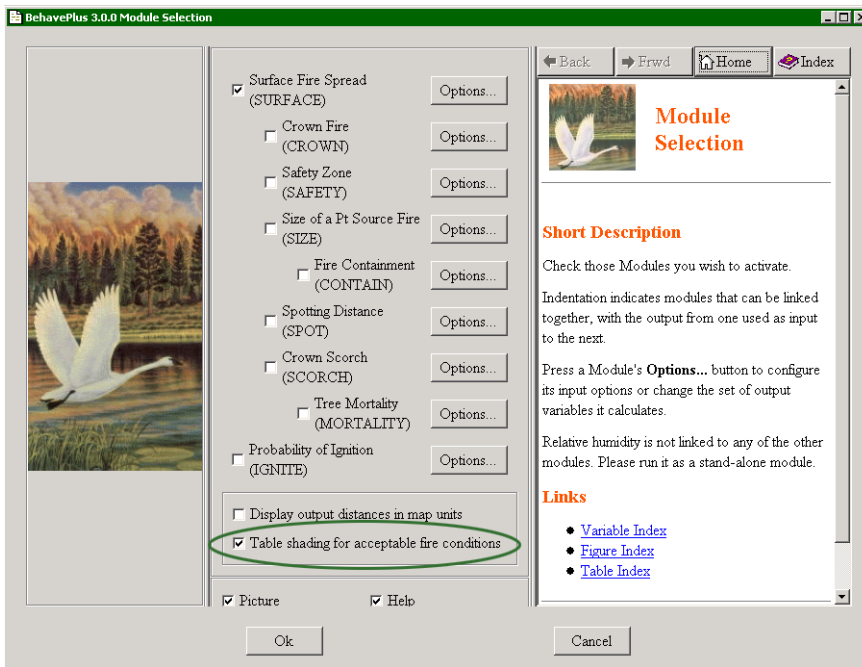


Once the Table shading for acceptable fire conditions check box is selected a new section, Acceptable Fire Conditions, appears on the Worksheet.

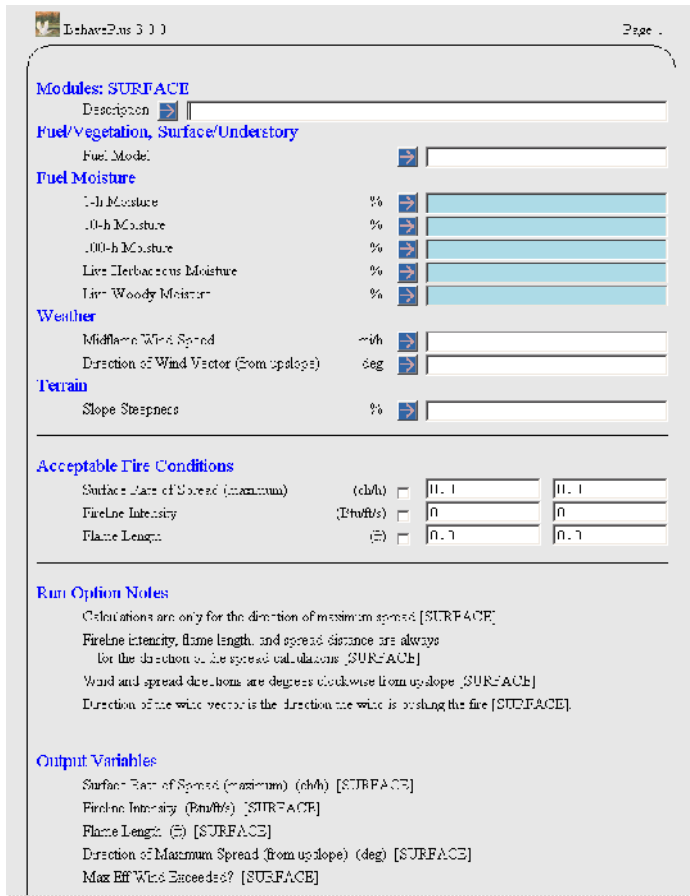

Notice that some of the output variables are listed in the Acceptable Fire Conditions section. Not all the output variables are available to be constrained. The output variables that can be used to identify acceptable fire conditions are listed in Table 2 of Appendix B.


### 7.2. Entering Acceptable Fire Conditions

In the Acceptable Fire Conditions section each output variable listed has a check box and two text boxes for entering the range of acceptable fire conditions. By default the check boxes are cleared. The ranges specified in the text boxes are only considered if the output variable check box is selected.

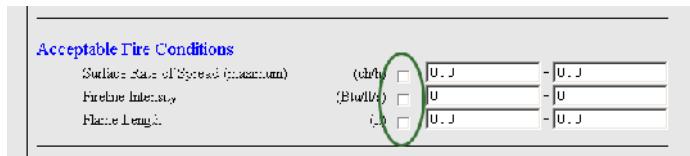

This allows you to view all the output variables you want while only using a subset to define your acceptable fire conditions. Of course if an output variable is of no interest then clear it from the Outputs tab for the appropriate module and it appears in neither the Acceptable Fire Conditions or Output Variables section.

After selecting the output variables to define acceptable fire conditions enter the acceptable ranges in the corresponding text boxes.

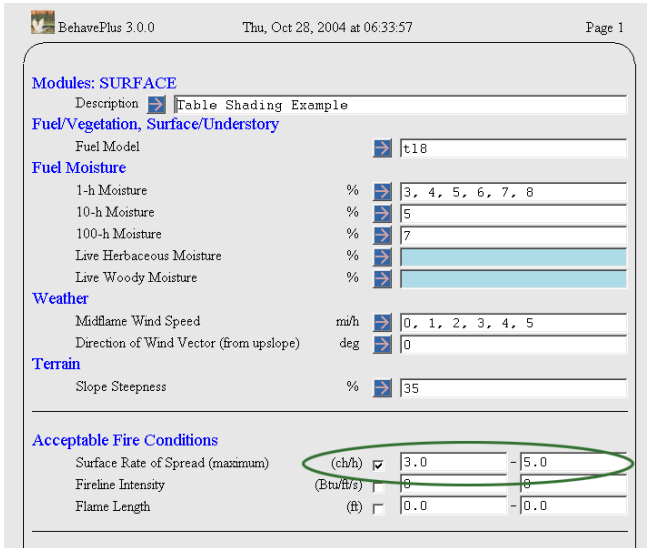

If you decide to clear a check box in the Acceptable Fire Conditions section there is no need to zero out the range text boxes, any ranges are ignored if the check box is cleared.

### 7.3. Viewing Results

After calculating the Run the table output will look like this.

Table Shading Example  
Surface Rate of Spread (maximum) (ch/h)

1-h Moisture (%)	Midflame Wind Speed (mi/h)					
	0.0	1.0	2.0	3.0	4.0	5.0
3	<del>4.1</del>	<del>3.5</del>	<del>2.6</del>	<del>2.1</del>	<del>1.6</del>	<del>1.8</del>
4	<del>4.1</del>	<del>3.1</del>	<del>2.2</del>	<del>1.7</del>	<del>1.1</del>	<del>1.8</del>
5	<del>4.1</del>	<del>2.0</del>	<del>1.0</del>	<del>0.5</del>	<del>0.1</del>	<del>0.4</del>
6	<del>4.1</del>	<del>1.6</del>	<del>1.5</del>	<del>1.5</del>	<del>1.2</del>	<del>1.4</del>
7	<del>4.1</del>	<del>1.2</del>	<del>1.2</del>	<del>1.3</del>	<del>1.2</del>	<del>1.4</del>
8	<del>4.3</del>	<del>1.2</del>	<del>1.0</del>	<del>1.0</del>	<del>1.1</del>	<del>1.4</del>

The output values are crossed out (shaded) except for those specified as acceptable on the Worksheet. The table outputs for all output variables are shaded, but only for the ranges selected on the Worksheet in the Acceptable Fire Conditions section. For example,

Table Shading Example  
Fireline Intensity (Btu/ft/s)

1-h Moisture (%)	Midflame Wind Speed (mi/h)					
	0.0	1.0	2.0	3.0	4.0	5.0
3	<del>41</del>	<del>32</del>	<del>20</del>	<del>13</del>	<del>10</del>	<del>10</del>
4	<del>36</del>	<del>44</del>	<del>10</del>	<del>9</del>	<del>10</del>	<del>10</del>
5	<del>30</del>	<del>26</del>	<del>12</del>	<del>8</del>	<del>8</del>	<del>10</del>
6	<del>26</del>	<del>18</del>	<del>45</del>	<del>61</del>	<del>77</del>	<del>36</del>
7	<del>20</del>	<del>18</del>	<del>40</del>	<del>50</del>	<del>60</del>	<del>15</del>
8	<del>21</del>	<del>16</del>	<del>16</del>	<del>17</del>	<del>11</del>	<del>16</del>

On the Fireline Intensity table above, the crossed out values are the ones that are outside of the 3-5 ch/h surface rate of spread range.

If Fireline Intensity is also selected to define acceptable fire conditions all output tables will change.

**Acceptable Fire Conditions**

Surface Rate of Spread (maximum) (ch/h)  3.0 - 5.0

Fireline Intensity (Btu/ft/s)  0 - 50

Flame Length (ft)  0.0 - 0.0

For the above ranges using the same fuel, weather, and topography inputs the table outputs looks like this;

BehavePlus 3.0.0 Thu, Oct 28, 2004 at 07:39:42 Page 3

**Table Shading Example**  
Surface Rate of Spread (maximum) (ch/h)

1-h Moisture %	Midflame Wind Speed mph					
	0.0	1.0	2.0	3.0	4.0	5.0
3	2.7	3.4	4.3	5.1	6.3	7.8
4	2.1	3.1	4.2	5.5	7.1	8.8
5	2.2	2.8	3.7	5.0	6.5	8.1
6	2.0	2.6	3.5	4.8	6.3	7.9
7	1.9	2.7	3.2	4.3	5.5	6.9
8	1.8	2.5	3.1	4.0	5.1	6.4

BehavePlus 3.0.0 Thu, Oct 28, 2004 at 07:39:42 Page 4

**Table Shading Example**  
Fireline Intensity (Btu/ft/s)

1-h Moisture %	Midflame Wind Speed mph					
	0.0	1.0	2.0	3.0	4.0	5.0
3	31	52	71	90	115	149
4	53	44	61	79	102	137
5	50	38	52	69	88	110
6	35	30	41	50	67	86
7	23	29	40	53	66	85
8	21	26	36	47	61	76

Now acceptable output must meet both ranges of acceptable conditions which further constrains the fuel moisture and wind conditions that give desired results. Selecting two or more variables in the Acceptable Fire Conditions section can give very complex results that should be interpreted carefully.

## 8. Graph output

When more than one value is entered for one or two input variables, graphs can be produced. Graphs are viewed by selecting the Display Graph Results check box in the "Calculate Results" dialog box that displays after Calculate is requested. The form of the graph depends on whether the variables are continuous or discrete. The program automatically takes care of the differences for the user.



Display table results

Display graph results

Specify graph Y axis limits

### 8.1. Single variable graph

When a range of values is entered for a single continuous variable, a graph is produced by calculating a fixed number of points (which can be changed in the Configure > Appearance > Graph Elements tab) over the entered range. Intermediate values entered on the Worksheet are ignored. For example, rate of spread entry of 5, 7, 9, 11, 13, 15 produces the same graph as rate of spread entry of 5, 15:

BehavePlus 3.0.0 Tue, Nov 02, 2004 at 20:05:15 Page 1

Modules: SIZE

Description: Graph examples


Weather

Effective Wind Speed m/h 5

Fire

Surface Rate of Spread (maximum) ch/h 5, 15

Elapsed Time h 1.0

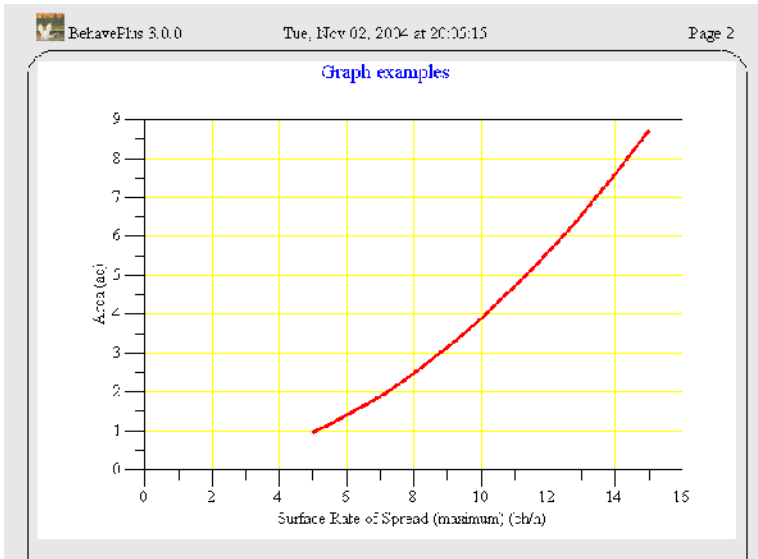

When a range of values is assigned to a discrete variable, a single calculation is performed for each value and a bar graph is produced. For example, the following is a comparison of surface fire spread rates for the standard 13 fire behavior fuel models:

BehavePlus 3.0.0 Tue, Nov 02, 2004 at 20:26:07 Page 1

Modules: SURFACE

Description [Graph examples](#)

Fuel/Vegetation, Surface/Understory

Fuel Model

Fuel Moisture

Dead Fuel Moisture %


Live Fuel Moisture %

Weather

Midflame Wind Speed (upslope) mi/h

Terrain

Slope Steepness %

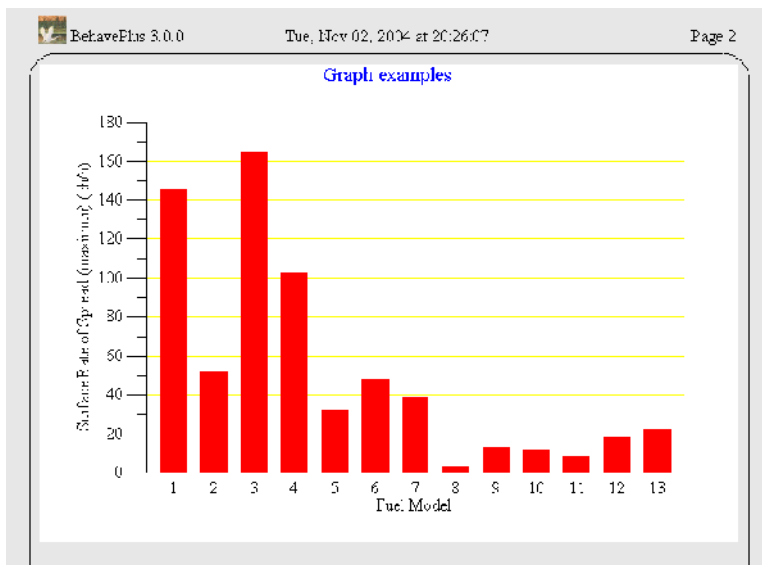

## 8.2. Two variable graph

When a range of values is assigned to two variables, a graph is produced. If both variables are continuous, the variable used for the X-axis can be selected from the "Calculate Results" dialog box. For example:

BehavePlus 3.0.0 Tue, Nov 02, 2004 at 20:41:55 Page 1

Modules: SURFACE

Description [Graph examples](#)

Fuel/Vegetation, Surface/Understory

Fuel Model

Fuel Moisture

Dead Fuel Moisture %

Live Fuel Moisture %

Weather


Midflame Wind Speed (upslope) mi/h

Terrain


Slope Steepness %





In the "Calculate Results" dialog box clear the Display table results check box and accept the defaults in the Display graph results section:

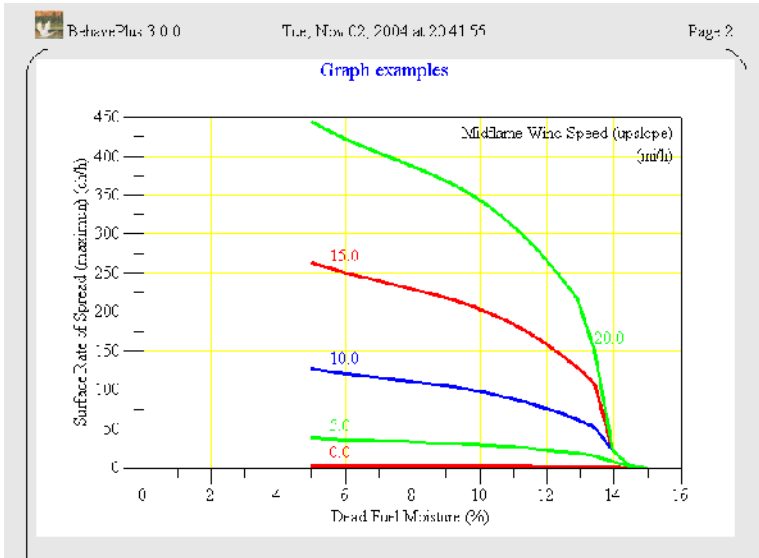


Changing the X-Axis Variable to the Midflame Wind Speed (upslope) in the "Calculate Results" dialog box produces a very different graph:

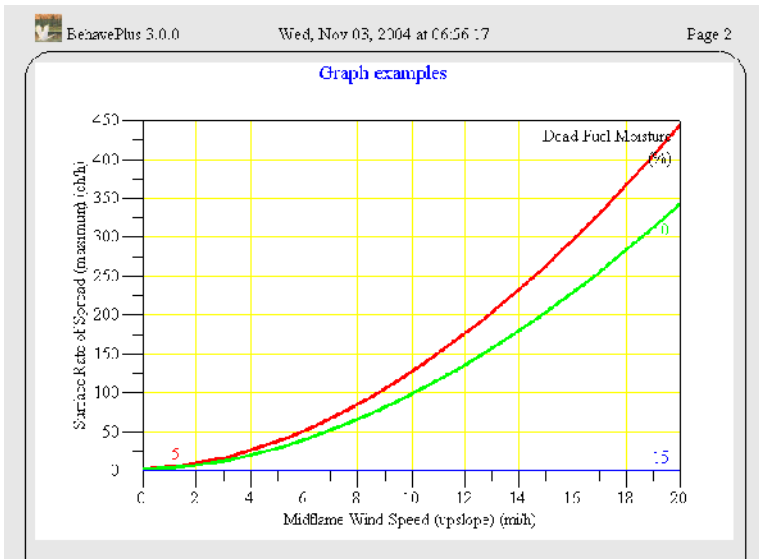

If a range is assigned to two variables, one continuous and one discrete, the continuous variable is always on the X-axis. For example:

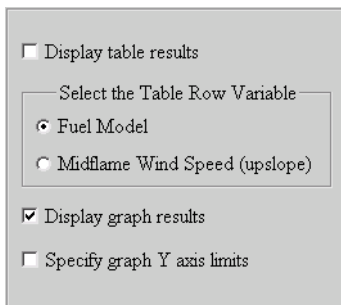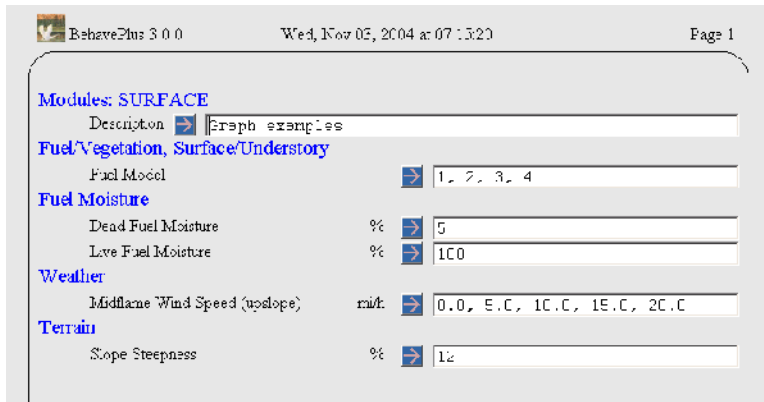

With two variables, one continuous and one discrete, you no longer have the option of changing the X-Axis Variable in the "Calculate Results" dialog box.

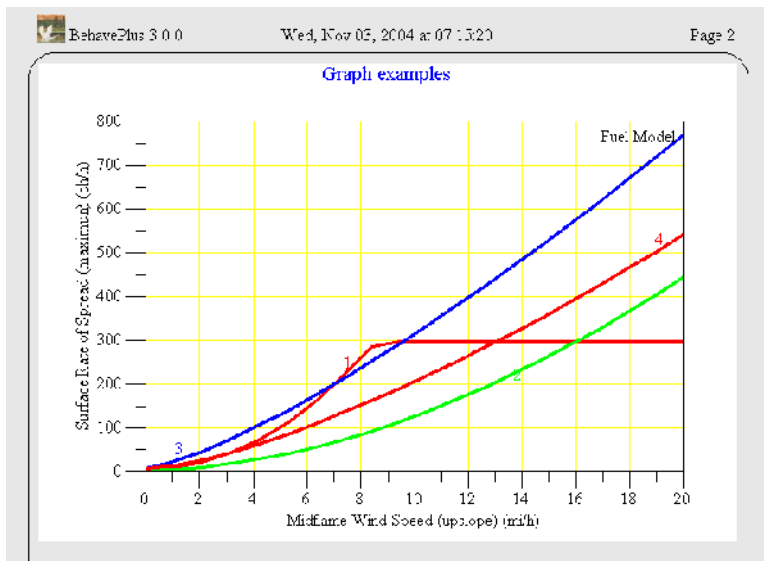

A graph is not possible when ranges are selected for two discrete variables.

### 8.3. Axis scales



Setting axis scales is important for getting the best information from your Runs, and especially for comparing graph output from different Runs.

#### 8.3.1. X-axis

The X-axis variable and scale are the same for all graphs produced by a Run. The maximum for the x-axis is set to be the maximum value specified for the variable on the Worksheet.


X Axis Origin and Y Axis Origin (minimum values) can be set for each as either zero or as the variable's minimum value as specified on the input Worksheet. The graph origin is set to (0,0) as the default.

For example, consider the following Run:

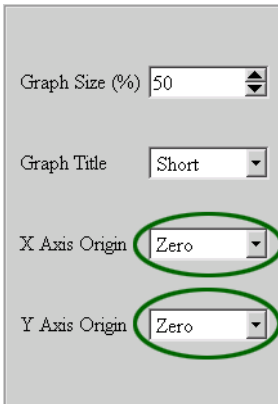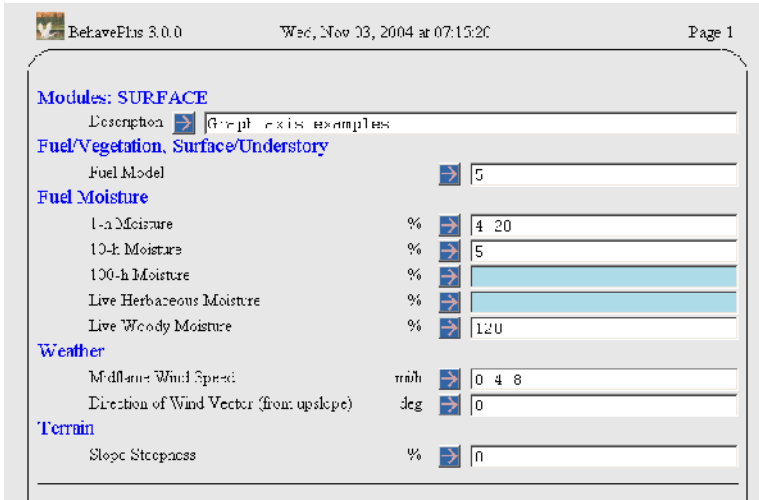

Options to define the origin of the graph are set through the Configure > Appearance > Graph Size tab.

Setting both the X Axis Origin and Y Axis Origin to zero produces the following graph:

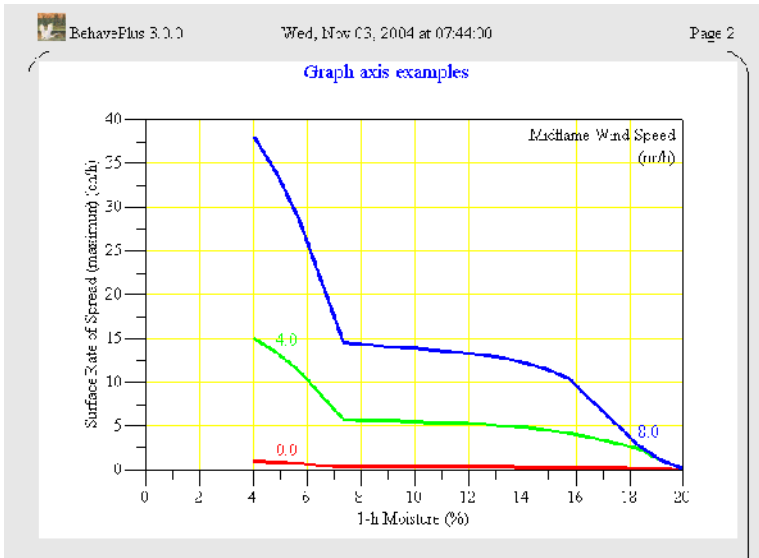


Graph Size (%) 50

Graph Title Short

X Axis Origin **Min Value**

Y Axis Origin Zero

In the Configure > Appearance > Graph Size tab select Min Value from the X-Axis Origin drop-down list to alter the graph appearance.

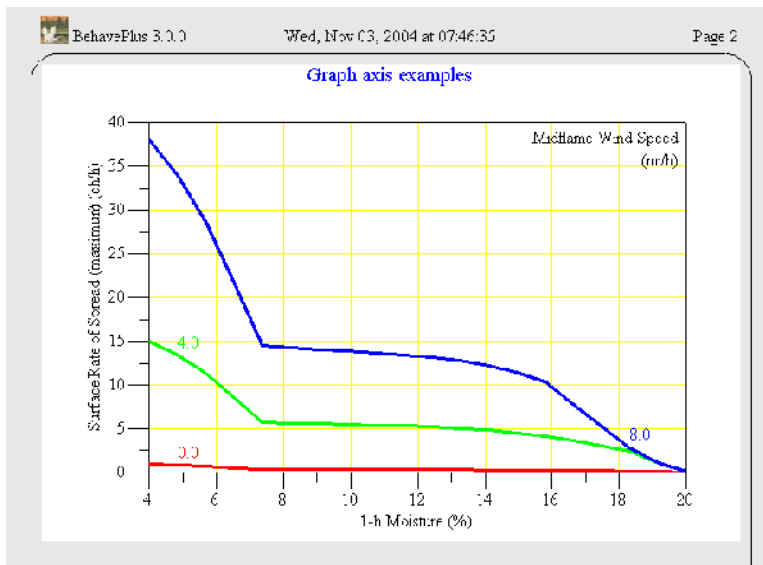

### 8.3.2. Y-axis

The Y-axis scale normally differs between graphs produced by a Run since each graph is for a different output variable. For example, fireline intensity and flame length have different ranges of output and require a different Y-axis scale. By default the Y-axis is scaled to the maximum calculated output value for the variable to make best use of the graph area.

When you want to compare graphs between Runs, different Y-axis scales can obfuscate the comparison. A rate of spread graph for fuel model 10, for example, usually has a narrower output range than for fuel model 5 under the same conditions. To better compare calculated rate of spread graphs for the two fuel models, you can set both graphs to have the same Y-axis scale.

The following Run is for fuel model 10, which has relatively low rates of spread.

BehavePlus 3.0.0 Wed, Nov 05, 2004 at 08:33:55 Page 1

**Modules: SURFACE**

Description Graph Y-axis examples

**Fuel/Vegetation, Surface/Understory**

Fuel Model 10

**Fuel Moisture**

1-h Moisture % 4.20

30-h Moisture % 5

100-h Moisture % 5

Live Herbaceous Moisture %

Live Woody Moisture % 12.0

**Weather**


Midflame Wind Speed mifft 0.48

Direction of Wind Vector (from upslope) deg 0

**Terrain**

Slope Steepness % 0

With the X Axis Origin and Y Axis Origin set to zero, the rate of spread graph below is produced:

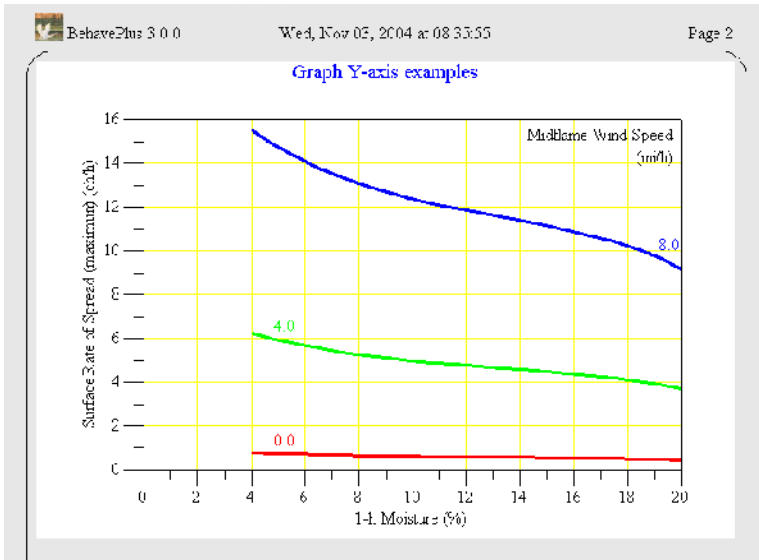

To compare the results for fuel model 10 with the faster spreading fuel model 5, the scale for the fuel model 10 Run is changed to match that produced by model 5. The calculated maximums are given for each of the selected output variables as a reference.

Display table results

Select the Table Row Variable

1-h Moisture

Midflame Wind Speed

Display graph results

Select the X-Axis Variable



1-h Moisture

Midflame Wind Speed


Specify graph Y axis limits

In the "Calculate Results" dialog box select the Specify graph Y axis limits check box if you wish to modify the Y-axis ranges of the output graphs before they are displayed.

This displays the "Graph Limits" dialog box, where you can change the Y-axis maximum for the variable Rate of Spread (maximum) to 40:

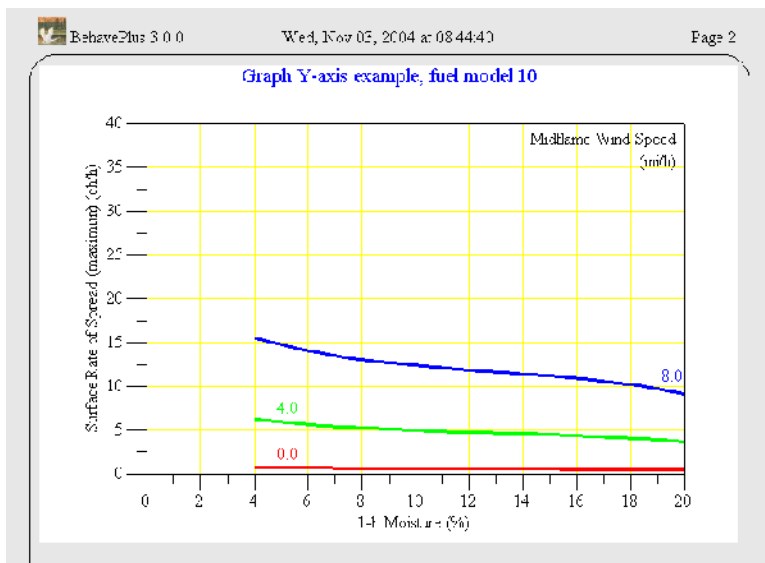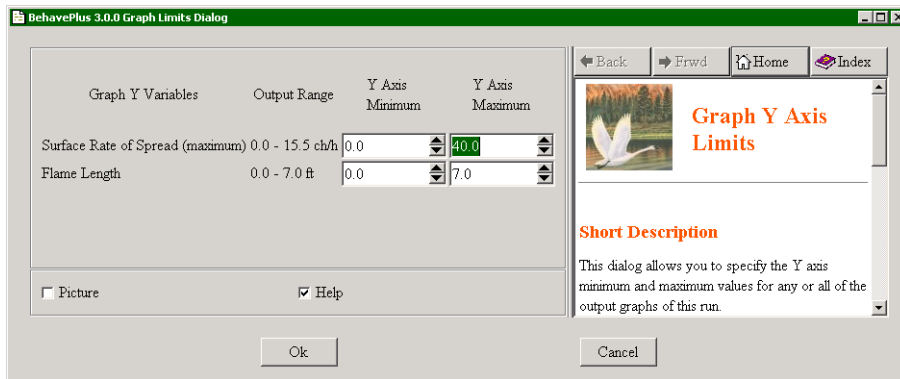


The comparison with the corresponding graph for fuel model 5 is now more straightforward now that the axis are the same.

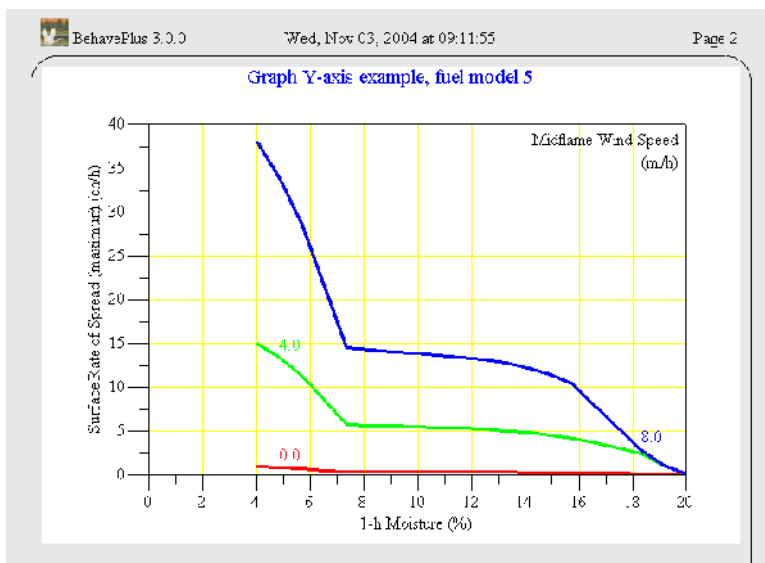


## 8.4. Graph appearance

The appearance of the graph can be changed through the Configure > Appearance > Graph Size and Configure > Appearance > Graph Elements tabs.

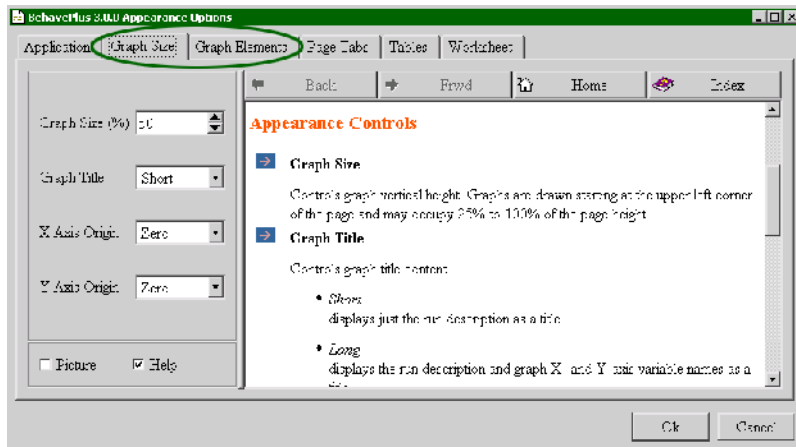


### 8.4.1. Graph Size

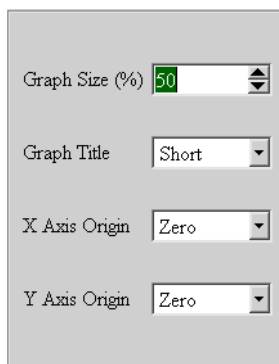

The vertical graph height on the page is set with the Graph Size(%) spin box on the Configure > Appearance > Graph Size tab.

Graphs are drawn starting at the upper left corner of the page and may occupy 25% to 100% of the page height. The default is 50%, as shown in the following graph.

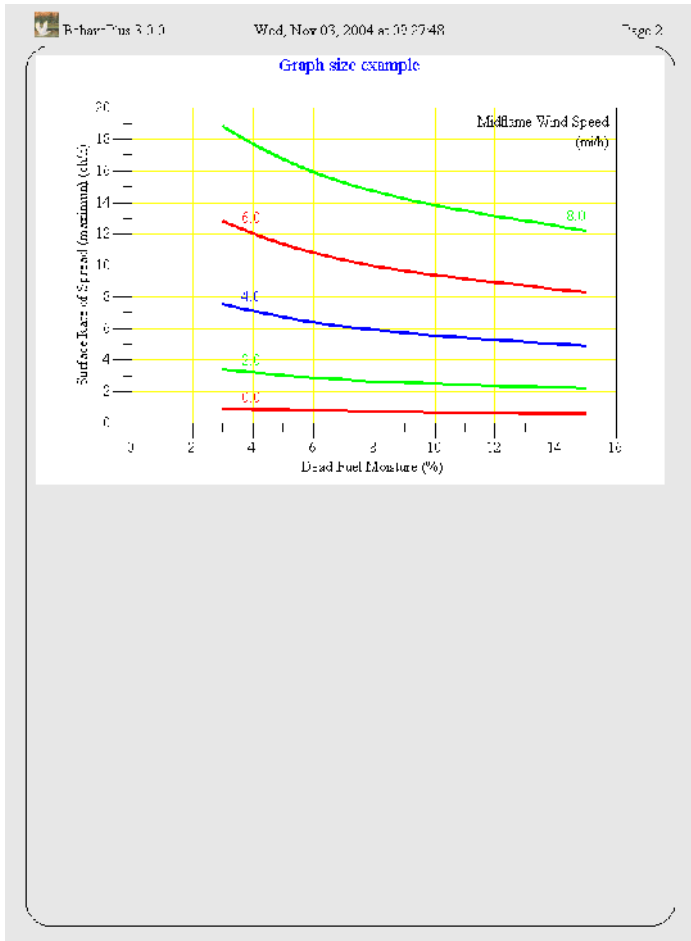

Changing the Graph Size to 100% changes the above to the following graph:


Graph Size (%)

Graph Title

X Axis Origin

Y Axis Origin



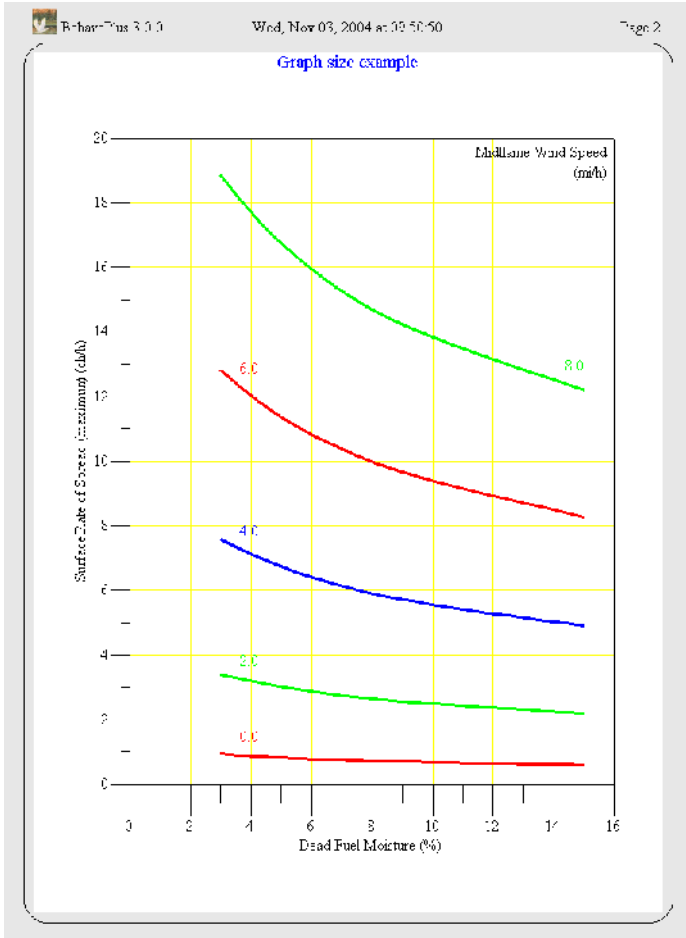

### 8.4.2. Graph Title

Graph Size (%) 50


Graph Title Short

X Axis Origin Zero



Y Axis Origin Zero

The graph title content is controlled using the Graph Title drop-down list on the Configure > Appearance > Graph Size tab.


Selecting Short from the Graph Title drop-down list displays just the contents of the Worksheet Description text box as the title. Selecting Long displays the Description text box and the graph variables.

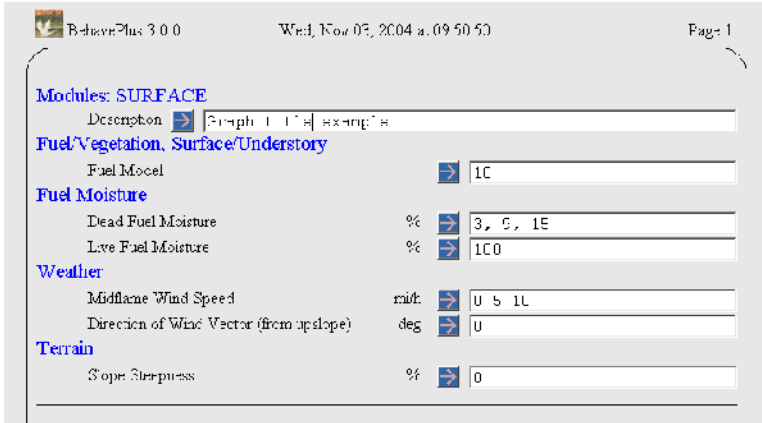

Using the above Run a graph with a short title (the default) looks like the following.

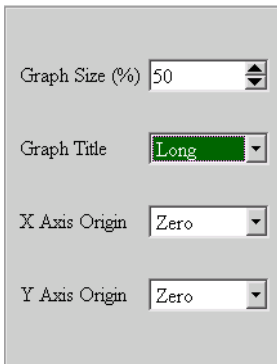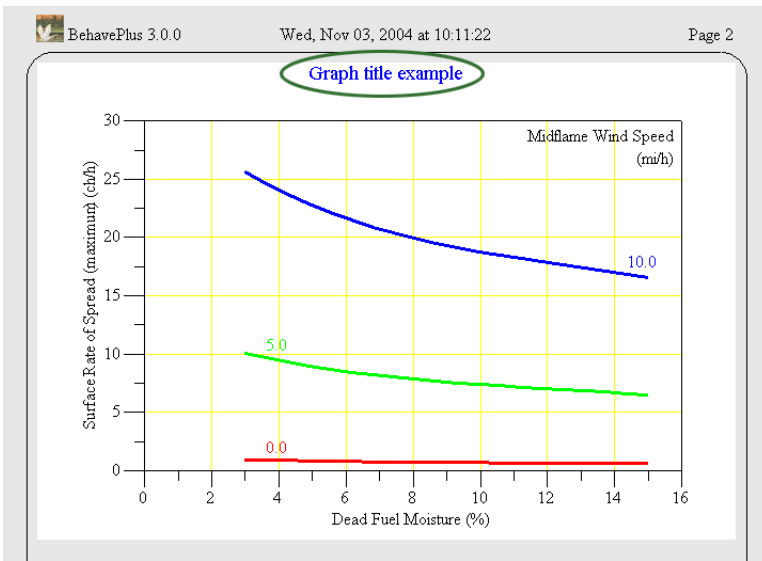


Selecting Long from the Graph Title drop-down list on the Configure > Appearance > Graph Size tab adds more information to the title.

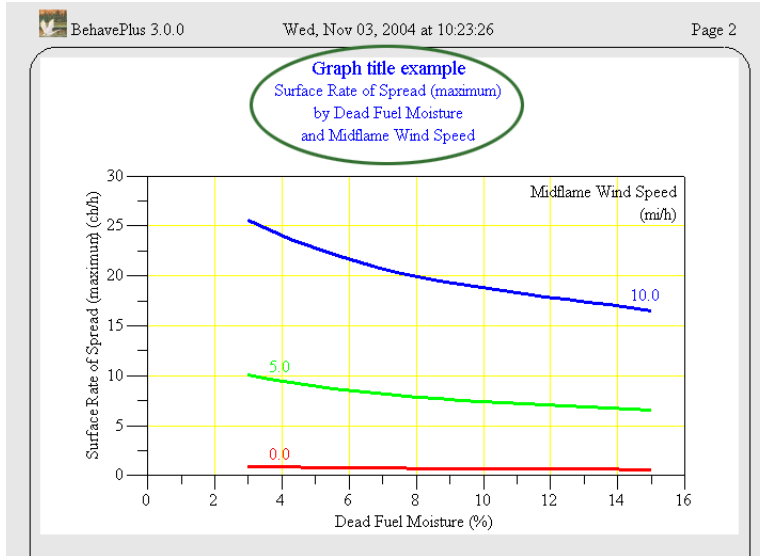

### 8.4.3. Graph colors

Graph colors can be changed with the Configure > Appearance > Graph Elements tab.

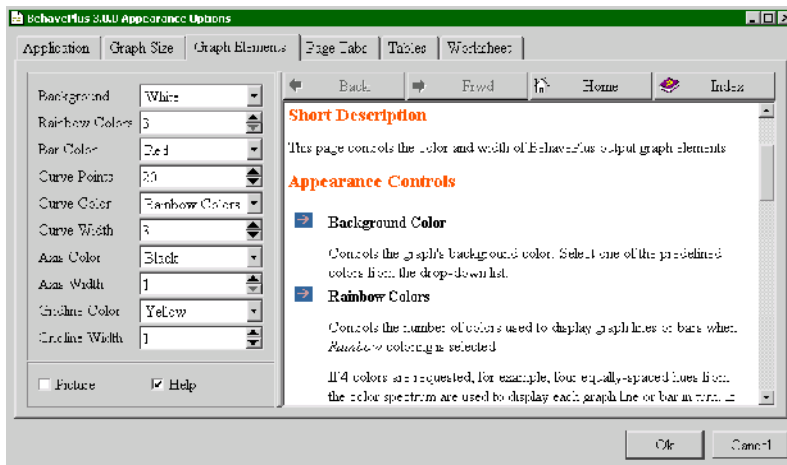

Colors are selected from the predefined drop-down lists.

**Background** is the background color of the graph.

**Rainbow Colors** sets the number of colors used to display graph lines or bars when Rainbow Colors is selected as the curve color. With three rainbow colors, the colors are red, green, and blue. If 4 colors are requested, four equally spaced hues from the color spectrum are used to display each graph line or bar in turn.

**Bar Color** is used to fill graph bars. Selecting Rainbow Colors fills each bar with its own color. The number of rainbow colors is set by the Rainbow Colors spin box discussed above.


**Curve Color** is used to draw graph lines. Selecting Rainbow Colors draws each line with its own color. The number of rainbow colors is set by the Rainbow Colors spin box discussed above.

**Axis Color** is used to draw graph axis lines, tic marks, and axis labels.

**Gridline Color** is for the graph grid lines. The default is yellow.

Background	White
Rainbow Colors	10
Bar Color	Red
Curve Points	20
Curve Color	Rainbow Colors
Curve Width	3
Axis Color	Black
Axis Width	1
Gridline Color	Yellow
Gridline Width	1

Changing Rainbow Colors to 10 results in the following graph coloring:

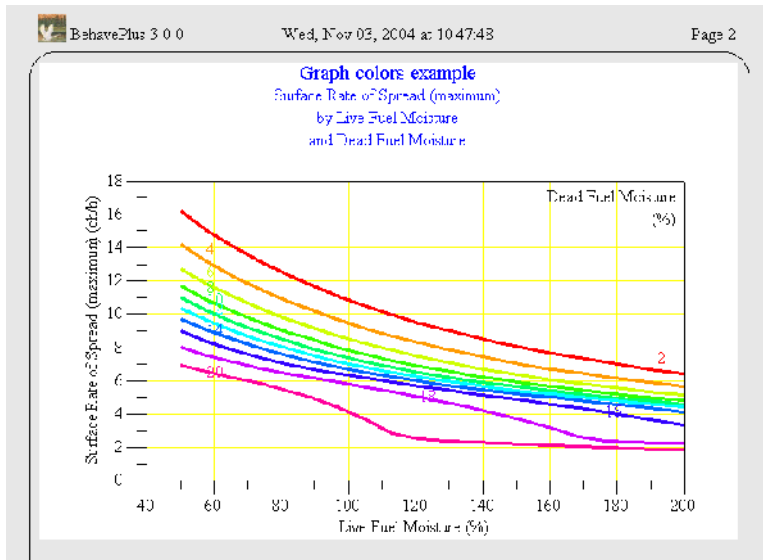

### 8.4.4. Line widths

Background	White
Rainbow Colors	10
Bar Color	Red
Curve Points	20
Curve Color	Rainbow Colors
Curve Width	3
Axis Width	1
Gridline Color	Yellow
Gridline Width	1


Line widths can be changed using the Curve Width, Axis Width, and Gridline Width spin boxes on the Configure > Appearance > Graph Elements tab.

**Curve Width** sets the width of graph lines. 0 is the thinnest and 9 thickest.

**Axis Width** sets the width of axis lines drawn on the graph. 1 is thinnest and 9 thickest.

**Gridline Width** sets the width of grid lines drawn on the graph. 1 is thinnest and 9 thickest. To prevent the display of any grid lines set Gridline Width to 0.

The following graph uses the default line settings.

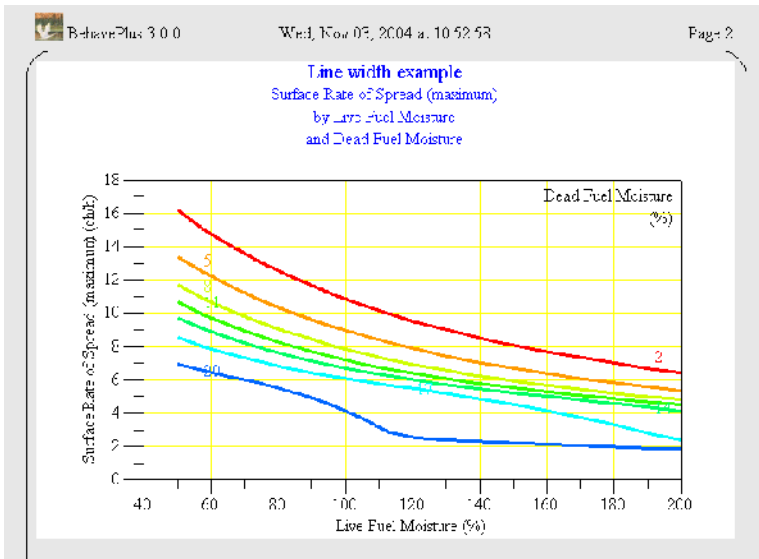

## 8.5. Number of curve points

Background	White
Rainbow Colors	3
Bar Color	Red
Curve Points	20
Curve Color	Rainbow Colors
Curve Width	3
Axis Color	Black
Axis Width	1
Gridline Color	Yellow
Gridline Width	1


The resolution of the curves can be changed with the Curve Points spin box on the Configure > Appearance > Graph Elements tab.

The Curve Points spin box determines the number of points calculated for each curve in the graph. A straight-line segment is drawn between each pair of points. The default of 20 is visually adequate for most graphs. Requesting more points usually results in a marginal improvement in the visual appearance and requires more computation time. In cases where many curves are plotted and the calculation time is slow, reducing the number of curve points will speed things up.

Background	White
Rainbow Colors	3
Bar Color	Red
Curve Points	5
Curve Color	Rainbow Colors
Curve Width	3
Axis Color	Black
Axis Width	1
Gridline Color	Yellow
Gridline Width	1

Changing Curve Points from the default of 20 to 5 results in the following graph:

Compare with the graph in the previous Line widths section. The fewer line points give the curves a more jagged appearance.

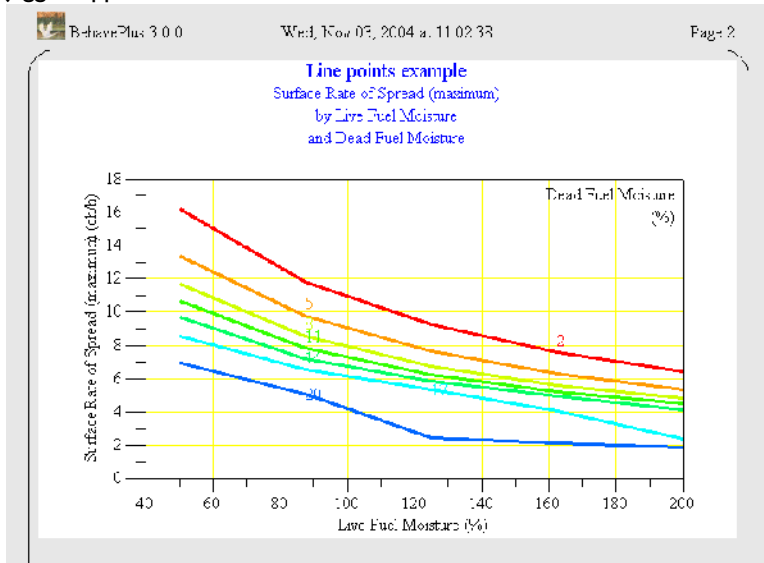

# 9. Diagram output



In addition to the usual table and graph output, BehavePlus produces diagrams for the following output variables.

- Wind/slope/fire spread direction diagrams from the SURFACE module
- Fire characteristics chart from the SURFACE module
- Shape of a point source fire from the SIZE module
- Shape of a fire after suppression action from the CONTAIN module


Diagram output is selected from the lists on the Configure > Module selection > (module name) > Options... > Outputs tab for the corresponding module.

## 9.1. Wind/slope/spread direction


Direction diagrams can help the user avoid confusion on directions for wind, slope, and spread directions.

Direction input options are selected on the Configure > Module selection > SURFACE > Options... > Directions tab.

Direction diagrams are produced with the Configure > Module selection > SURFACE > Options... > Outputs tab and selecting the Wind/Slope/Spread Direction Diagram check box.

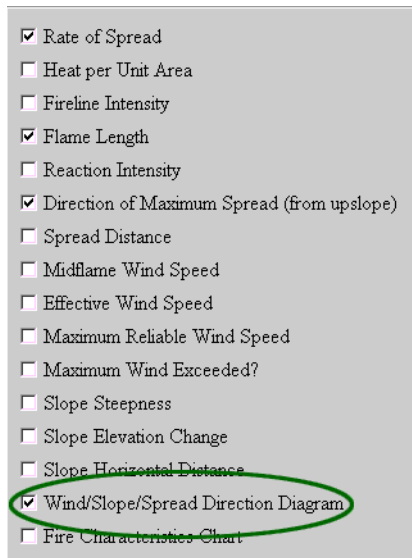

The diagrams differ according to the direction Input Options selected from the Configure > Module selection > SURFACE > Options... > Directions tab. The following shows the Input Option selection, the resulting Worksheet, the outputs table and diagrams.

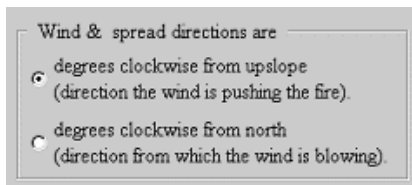

BehavePlus 3.0.0 Wed, Nov 03, 2004 at 11:19:03 Page 1

**Modules: SURFACE**  
 Description [v] Wind/Slope/Spread direction example

**Fuel/Vegetation, Surface/Understory**  
 Fuel Model [v] 2

**Fuel Moisture**  
 Dead Fuel Moisture % [v] 6  
 Live Fuel Moisture % [v] 120

**Weather**  
 Midflame Wind Speed m/h [v] 5  
 Direction of Wind Vector (from upslope) deg [v] 100

**Terrain**  
 Slope Steepness % [v] 10 40

---

**Run Option Notes**  
 Calculations are only for the direction of maximum spread [SURFACE].  
 Fireline intensity, flame length, and spread distance are always  
 for the direction of the spread calculations [SURFACE].  
 Wind and spread directions are degrees clockwise from upslope [SURFACE].  
 Direction of the wind vector is the direction the wind is pushing the fire [SURFACE].

---


**Output Variables**  
 Surface Rate of Spread (maximum) (ch/h) [SURFACE]  
 Flame Length (ft) [SURFACE]  
 Direction of Maximum Spread (from upslope) (deg) [SURFACE]  
 Wind/Slope/Spread Direction Diagram [SURFACE]

BehavePlus 3.0.0 Wed, Nov 03, 2004 at 11:19:05 Page 2

**Wind/Slope/Spread direction example**

Slope	ROS (max)	Flame Length	Direction Max ROS
%	ch/h	ft	deg
10	33.1	6.1	99
40	32.9	6.1	84



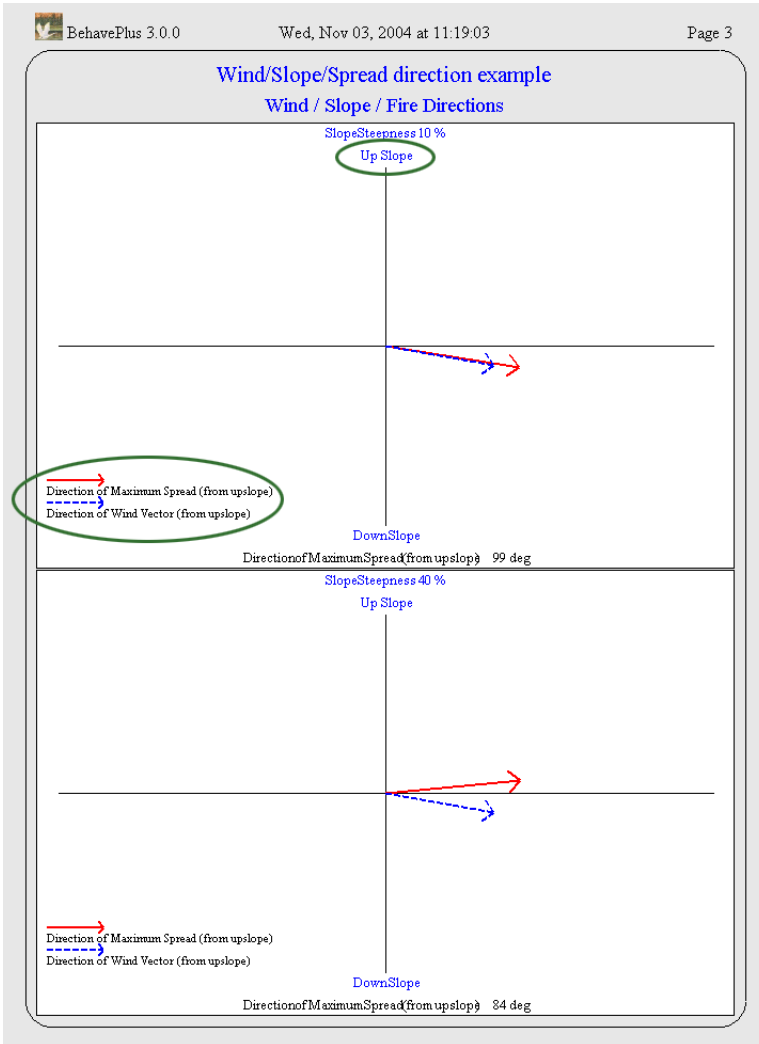

The following illustrates the effect of selecting the Wind & spread directions are radio button on the variables that are requested on the Worksheet.

Wind & spread directions are

- degrees clockwise from upslope  
(direction the wind is pushing the fire).
- degrees clockwise from north  
(direction from which the wind is blowing).

BehavePlus 3.0.0 Mon, Nov 08, 2004 at 06:03:54 Page 1

**Modules: SURFACE**

Description

**Fuel/Vegetation, Surface/Understory**

Fuel Model

**Fuel Moisture**

Dead Fuel Moisture %

Live Fuel Moisture %

**Weather**

Midflame Wind Speed m/h

Wind Direction (from north) deg

**Terrain**

Slope Steepness %

Aspect (from north) deg

---

**Run Option Notes**

Calculations are only for the direction of maximum spread [SURFACE].

Fireline intensity, flame length, and spread distance are always for the direction of the spread calculations [SURFACE].

Wind and spread directions are degrees clockwise from north [SURFACE].

Wind direction is the direction from which the wind is blowing [SURFACE].

---

**Output Variables**

Surface Rate of Spread (maximum) (ch/h) [SURFACE]

Flame Length (ft) [SURFACE]


Direction of Maximum Spread (from north) (deg) [SURFACE]

Wind/Slope/Spread Direction Diagram [SURFACE]

BehavePlus 3.0.0 Mon, Nov 08, 2004 at 06:03:54 Page 2

**Wind/Slope/Spread direction example**

Slope	ROS	Flame	Direction
%	(max)	Length	Max ROS
	ch/h	ft	deg
10	3.1	6.1	3
40	2.9	6.1	354

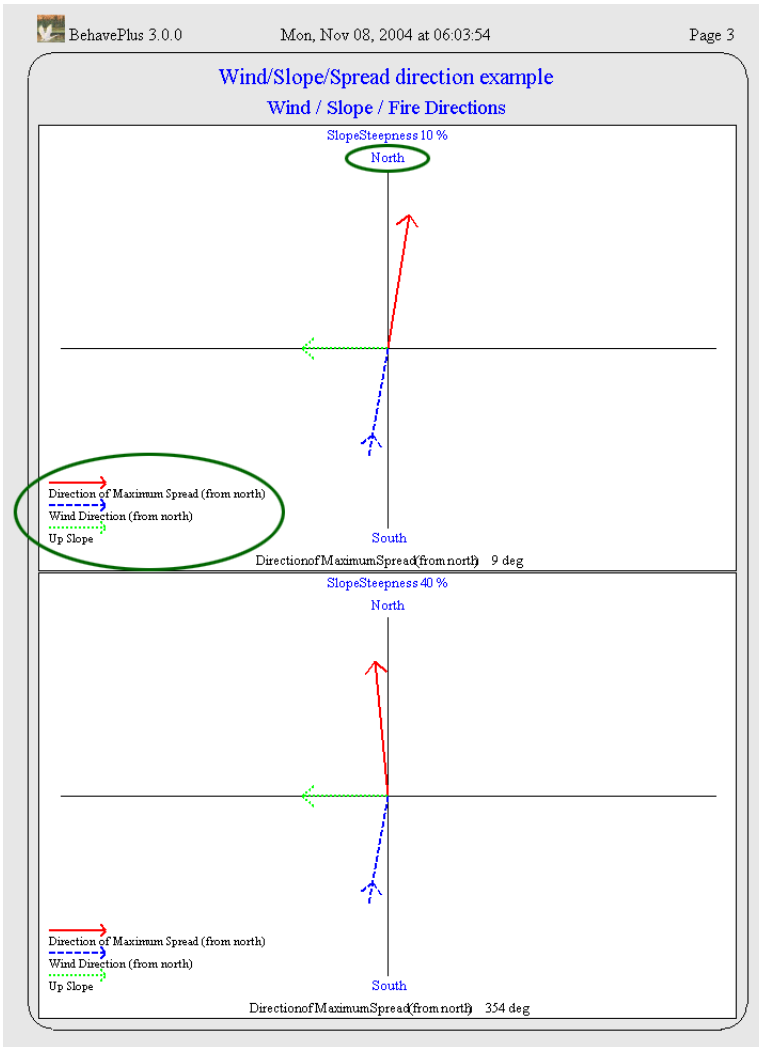

## 9.2. Fire characteristics chart

A fire characteristics chart diagram plots the relationship of rate of spread, heat per unit area, flame length, and fireline intensity. This option is a simplified plot and does not offer the user any display options. Axis scales are set automatically and points are labeled with simple numbers. In the future, BehavePlus will provide a Fire Characteristics Tool so that the user can customize it for a specific need.

- Rate of Spread
- Heat per Unit Area
- Fireline Intensity
- Flame Length
- Reaction Intensity
- Direction of Maximum Spread (From upslope)
- Spread Distance
- Maximum Wind Speed
- Effective Wind Speed
- Maximum Reliable Wind Speed
- Maximum Wind Exceeded?
- Slope Steepness
- Slope Elevation Change
- Slope Horizontal Distance
- Wind/Slope/Spread Direction Diagram
- Fire Characteristics Chart

Fire characteristics charts are produced with the Configure > Module selection > SURFACE > Options... > Outputs tab and selecting the Fire Characteristics Chart check box.

It is not necessary to select the four output variables that are plotted on the chart.

The following shows the Worksheet and resulting output table and Fire Characteristics Chart.

BehavePlus 3.0.0 Mon, Nov 08, 2004 at 06:58:34 Page 1

**Modules: SURFACE**

Description: Fire Characteristics Chart example

**Fuel/Vegetation, Surface/Understory**

Fuel Model: 2 5 10

**Fuel Moisture**

Dead Fuel Moisture: % 5

Live Fuel Moisture: % 100

**Weather**

Midflame Wind Speed (upslope): mph 7

**Terrain**

Slope Steepness: % 10

---

**Run Option Notes**

Calculations are only for the direction of maximum spread [SURFACE].  
 Fireline intensity, flame length, and spread distance are always for the direction of the spread calculations [SURFACE].  
 Wind is blowing upslope [SURFACE].

---


**Output Variables**

Surface Rate of Spread (maximum) (cm/h) [SURFACE]  
 Fireline Intensity (Btu/ft/s) [SURFACE]  
 Flame Length (ft) [SURFACE]  
 Fire Characteristics Chart [SURFACE]

BehavePlus 3.0.0 Mon, Nov 08, 2004 at 07:01:45 Page 2

**Fire Characteristics Chart example**

Fuel Model	RCS (max) cm/h	Fireline Intensity Btu/ft/s	Flame Length ft
2	67.6	630	0.6
5	39.5	477	7.7
10	14.1	344	6.6

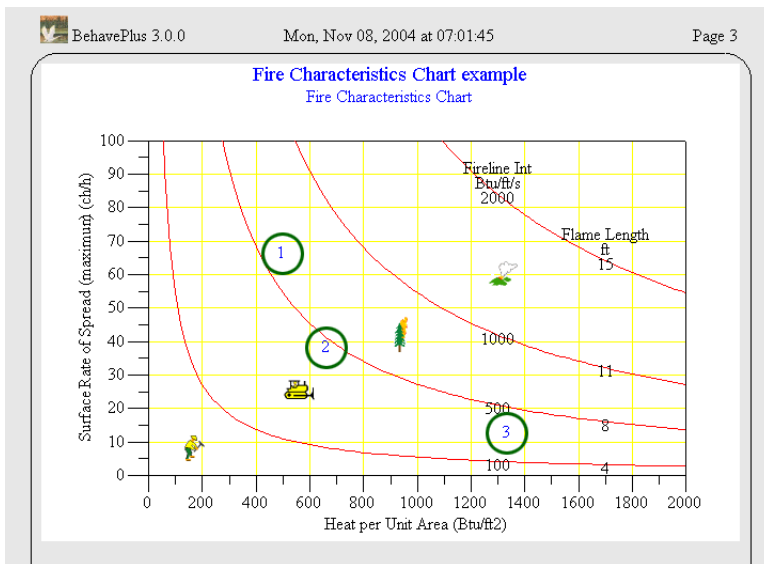

The points labeled 1, 2, and 3 correspond to the three lines of the output table. Point 1 is for fuel model 2, point 2 for fuel model 5, and point 3 for fuel model 10.

In the case of two variables with multiple entry values a two-way table is produced:

BehavePlus 3.0.0      Mon, Nov 06, 2004 at 07:28:30      Page 1

**Modules: SURFACE**  
 Description: Fire Characteristics Chart example

**Fuel/Vegetation, Surface/Understory**  
 Fuel Model: 5

**Fuel Moisture**  
 Dead Fuel Moisture: % 36.9  
 Live Fuel Moisture: % 100

**Weather**  
 Midflame Wind Speed (upslope): mph 7.10

**Terrain**  
 Slope Steepness: % 10

---

**Run Option Notes**  
 Calculations are only for the direction of maximum spread [SURFACE].  
 Fireline intensity, flame length, and spread distance are always for the direction of the spread calculations [SURFACE].  
 Wind is blowing upslope [SURFACE]


---

**Output Variables**  
 Surface Rate of Spread (maximum) (ch/h) [SURFACE]  
 Fire Characteristics Chart [SURFACE]

BehavePlus 3.0.0      Mon, Nov 06, 2004 at 07:28:30      Page 2

**Fire Characteristics Chart example**  
**Surface Rate of Spread (maximum) (ch/h)**

Dead Fuel Moisture	Midflame Wind Speed (upslope)	
%	7.0 mph	10.0 mph
3	44.7	77.4
6	36.1	58.5
9	13.5	21.8

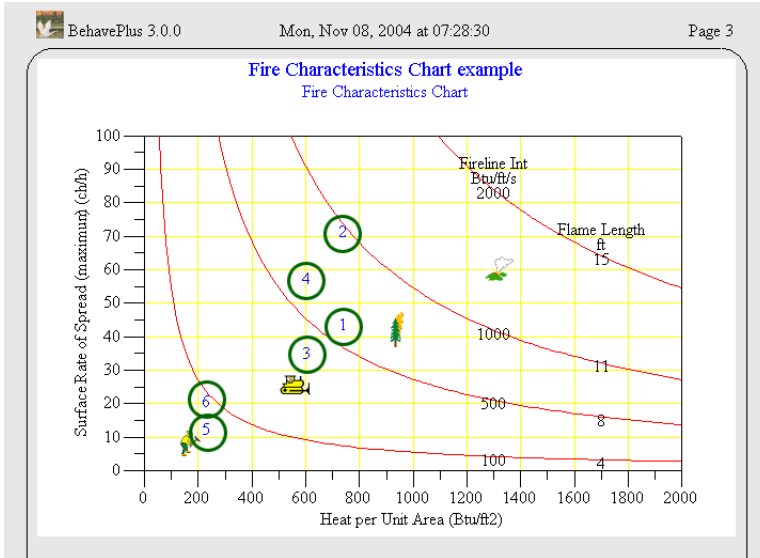

The numbers on the chart correspond to the table cells in left-to-right and top-to-bottom order. In this example, Points 1 and 2 are for the first row of the result table (3% moisture) at the two wind speeds (7 and 10 mi/h). Points 3 and 4 are for the second row of the result table (6% moisture) at the two wind speeds. Points 5 and 6 are for the third row of the result table (9% moisture) at the two wind speeds.

### 9.3. Shape of a point source fire

- Area
- Perimeter
- Length to Width Ratio
- Forward Spread Distance
- Backing Spread Distance
- Fire Length
- Maximum Fire Width
- Fire Shape Diagram

The elliptical shape of a point source fire can be plotted on the Configure > Module selection > SIZE > Options ... > Output Variables tab by selecting the Fire Shape Diagram check box.

For example, the following shows the Worksheet, output table, and Fire Shape Diagram.

**BehavePlus 3.0.0** Mon, Nov 08, 2004 at 08:07:13 Page 1



**Modules: SIZE**  
Description: Fire Shape Diagram example

**Weather**  
Effective Wind Speed: 0.6 mi/h

**Fire**  
Surface Rate of Spread (maximum): 10 ch/h  
Elapsed Time: 1.2 h

**Run Option Notes**  
None

**Output Variables**  
Area (a) [SIZE]  
Perimeter (ch) [SIZE]  
Length-to-Width Ratio [SIZE]  
Fire Shape Diagram [SIZE]

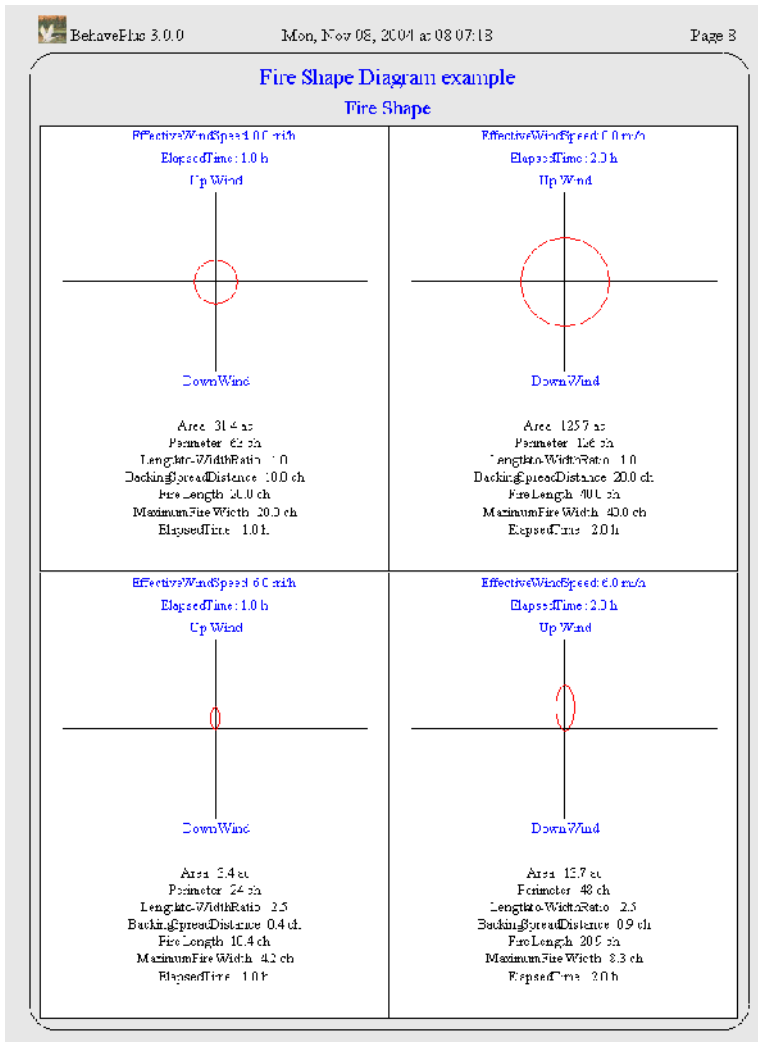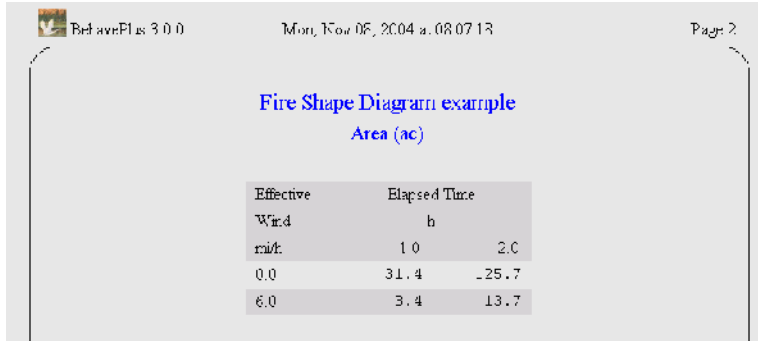

In addition to the shape diagrams, values for all of the selected output variables are given on each diagram.

A word of caution when using the SIZE module by itself as shown by the above example. The above diagram could be wrongly interpreted to show that higher wind speeds result in a smaller fire. But remember the surface rate of spread (10 ch/h) was the same for 0 and 6 m.p.h. winds, which is not realistic if all other fire environment conditions were the same. In this example the wind speed only determines the shape of a fire for a given forward spread distance.

When the SIZE Module is linked to the SURFACE Module, the wind vector is also shown on the diagram.

BehavePlus 3.0.0      Mon., Nov 08, 2014 at 09:15:47      Page 1

Modules: SURFACE, SIZE

Description: Fire Shape Diagram example

Fuel/Vegetation, Surface/Understory

Fuel Model: 7

Fuel Moisture

Dead Fuel Moisture: % 11

Live Fuel Moisture: % 11

Weather

Midflame Wind Speed: mph 7

Direction of Wind Vector (From upslope): deg 122

Terrain

Slope Steepness: % 50

Fire

Elapsed Time: h 1

---

Run Option Notes

Calculations are only for the direction of maximum spread [SURFACE].

Fireline intensity, flame length, and spread distance are always for the direction of the spread calculations [SURFACE].

Wind and spread directions are degrees clockwise from upslope [SURFACE].

Direction of the wind vector is the direction the wind is pushing the fire [SURFACE].

---

Output Variables

Surface Rate of Spread (maximum) (ch/h) [SURFACE]

Direction of Maximum Spread (From upslope) (deg) [SURFACE]

Area (ac) [SIZE]

Perimeter (ch) [SIZE]

Length-to-Width Ratio [SIZE]

Fire Shape Diagram [SIZE]

BehavePlus 3.0.0      Mon., Nov 08, 2014 at 09:15:47      Page 2

Fire Shape Diagram example

Surface Rate of Spread (maximum)	6.1 ch/h
Direction of Maximum Spread (From upslope)	107 deg
Area	110.5 ac
Perimeter	144 ch
Length-to-Width Ratio	2.7

BehavePlus 3.0.0      Mon., Nov 08, 2014 at 09:15:47      Page 3

Fire Shape Diagram example

Fire Shape

Area: 118.5 ac  
 Perimeter: 174 ch  
 Length-to-Width Ratio: 2.7  
 Elapsed Time: 1.0 h  
 Direction of Maximum Spread (From upslope): 107 deg



### 9.4. Containment shape

The Containment Diagram shows fire perimeter at time of report, at initial attack, and constructed fireline at the time the fire was successfully contained or when it escaped initial attack (all resources exhausted before containment).

Time from Report  
 Contain Status  
 Contained Area  
 Fireline Constructed  
 Number of Resources Used  
 Cost of Resources Used  
 Containment Diagram

The Containment Diagram is displayed by selecting the Containment Diagram check box from the Configure > Module selection > CONTAIN > Options ... > Output Variables tab. Also select the Contain Status check box to output whether the fire was Contained or Escaped on the Containment Diagram.

BehavePlus 3.0.0      Mon, Nov 03, 2004 at 10:08:25      Page 1

**Modules: CONTAIN**

Description: Containment Diagram example

**Fire**

Surface Rate of Spread (maximum)    chf: 1L  
 Fire Size at Report                    m: 0.5  
 Length-to-Width Ratio                h: 2

**Suppression**

Suppression Tactic                      h: Head, Rear  
 Line Construction Offset                ch: 0  
 Resource Line Production Rate        chf: 3C  
 Resource Arrival Time                  h: 0.5  
 Resource Duration                        h: 6

**Run Option Notes**

Suppression input is for a single resource [CONTAIN]; multiple values can be entered for any input variable.


**Output Variables**

Time from Report (h) [CONTAIN]  
 Contain Status [CONTAIN]  
 Contained Area (ac) [CONTAIN]  
 Fireline Constructed (ch) [CONTAIN]  
 Containment Diagram [CONTAIN]

BehavePlus 3.0.0      Mon, Nov 03, 2004 at 10:11:04      Page 2

**Containment Diagram example**


Suppression Tactic	Time from Report h	Contain Status	Contain Area ac	Fireline Constructed ch
Head	1.4	Contained	5.2	26.6
Rear	2.0	Contained	21.0	57.7

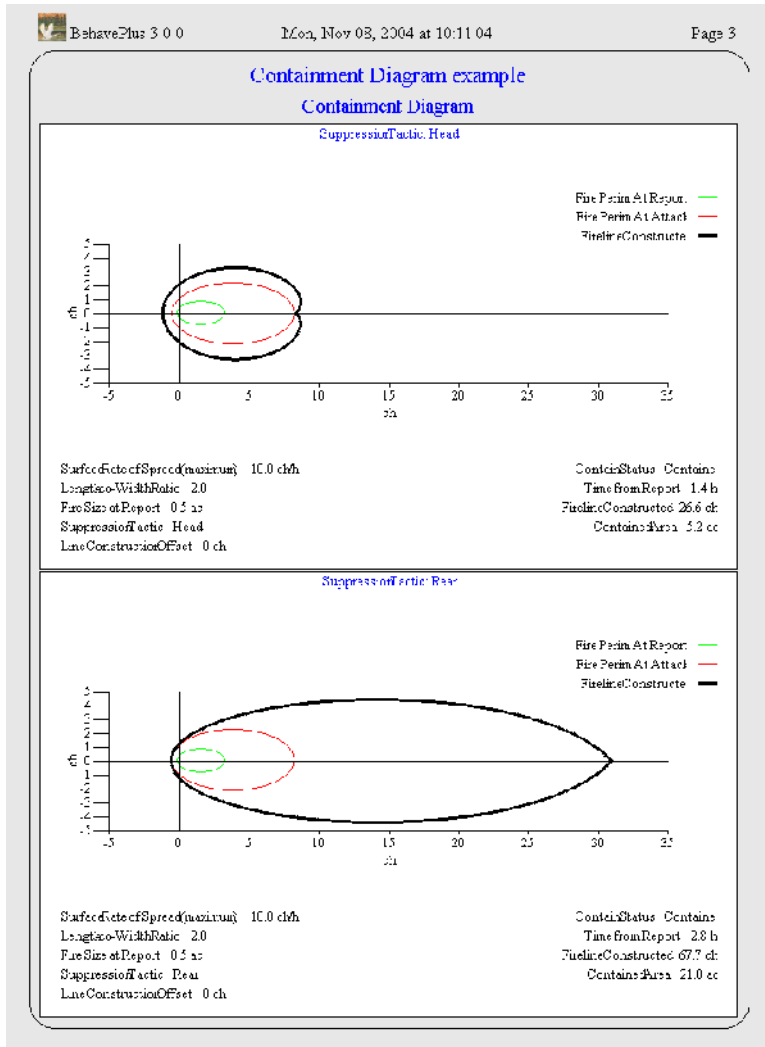

# 10. View, print, & capture results



## 10.1. View size

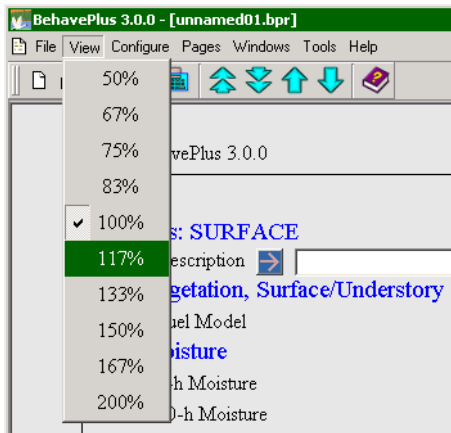





The View > xx% command changes the size of your Worksheet and Run when viewed on screen. It does not affect the size of printed output.


## 10.2. Pages

While each Run has its own window, the window has one or more Pages. The first page(s) contain the Worksheet, and subsequent pages contain results tables, graphs, and diagrams.

You can navigate between pages using the following toolbar buttons:

-  Go to the first page
-  Go to the last page
-  Go to the previous page
-  Go to the next page

The keyboard navigation arrows will also move you from one page to the next. The Pages > command allows you to jump directly to a specific page.

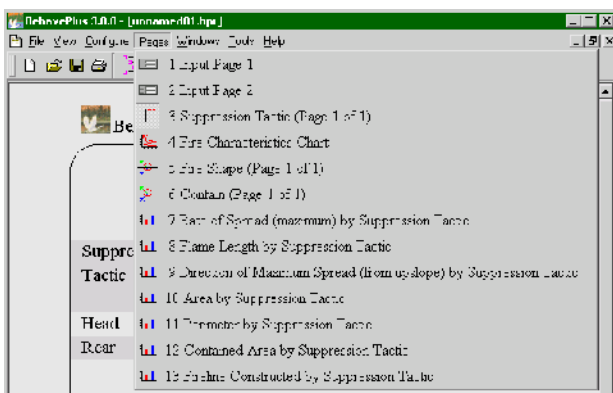


## 10.3. Windows



When a Worksheet is first opened, the Run it represents is assigned a default name such as "unnamed01.bpr", "unnamed02.bpr", etc. This name is displayed on the title bar at the top of the BehavePlus application window.


When you save a Run with the File > saveAs > Run command you should rename the Run. The name of the Run is then displayed in the title bar of the BehavePlus window. The complete path name for the Run is shown at the bottom of the BehavePlus application window.

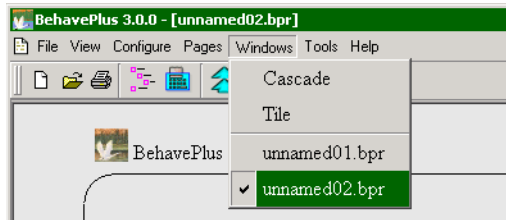

BehavePlus allows you to have any number of Runs open at once. Each Run has its own display window containing a Worksheet and possibly containing calculation results. Only one Run window is active at a time. The Windows menu item allows you to switch between Runs. It also allows you to cascade or tile the Runs within the BehavePlus window area with the Windows > Cascade or Windows > Tile commands. By default the Run windows are stacked on top of

each other, so you only see the active Run. If your Run windows are already cascaded or tiled, you can make a Run active by clicking it.

The following is a "tiled" display of the two Runs, one English, one metric. The English Run (unnamed01.bpr) is the active Run.

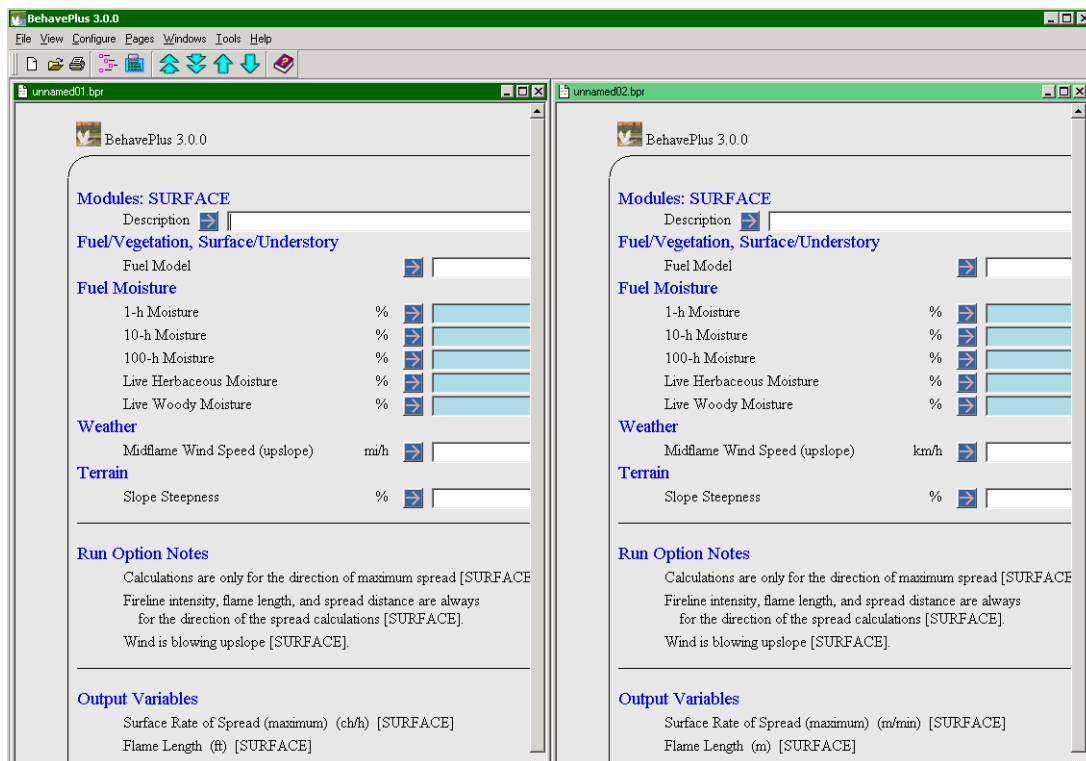

Selection can be made from the list of pages with text descriptions and an icon indicating whether it is a table, graph, diagram, etc.

## 10.4. Print

You can print all pages or selected pages with the File > Print command. Alternatively, select Print from the shortcut menu when you right click inside a page.

Whenever an output page is printed, it is good practice to print the associated Worksheet pages to avoid confusion on conditions for the Run. Printed pages are numbered and the date and time of the Run are included on the page header.

## 10.5. Saving Output

You can save your BehavePlus table output several ways. Tables, graphs, and diagrams can all be saved as an image of the screen display. The image file can then be edited with an image processor or inserted into word processor or layout documents. Table output can also be saved to a tab delimited text file or HTML file. The text file can then be imported into another application, such as word processor, spreadsheet, or database. The HTML file can be used in a Web page or is a handy, compact way to E-mail your BehavePlus results.

### 10.5.1. Saving a screen image

The currently displayed page can be captured and saved as a file in bmp, jpg, or png format with the File > saveAs > Image command. In the "Save As" dialog box enter a file name in the Capture File text box and select a file type from the Capture Type drop-down list. The file extension will be automatically added to the file name

In addition to the File > saveAs > Image command, you can use the ALT-Print Screen key or a screen capture utility (e.g. FullShot) to insert results from BehavePlus in other documents. The following steps are an example and do not constitute endorsement of specific software.

- Startup BehavePlus, WORD word processor, and FullShot software.
- On BehavePlus display, select the 'R' (for Region) in upper right hand of the window (put there by FullShot).
- Use the cursor to select the desired area
- Upon release of the mouse, FullShot opens with the selected image
- CTRL-C to save it in a clip board
- Go to the WORD document
- CTRL-V to insert the image

This is a quick and efficient method. There is no need to save the image in a file of its own. The image can be resized, cropped, or moved within WORD if desired.

### 10.5.2. Saving a Text File

Once you have calculated a Run you can save the table output as a tab delimited text file. Select the File > saveAs > Results > Spreadsheet command to open a standard Windows "Save As" dialog box. You can save this file anywhere, it does not have to be in a BehavePlus Workspace. The .123 file extension will be automatically added to your file name.


To use this file in Microsoft Excel, select the File > Open command and select your saved text file from the "Open" dialog box. Make sure that All Files (\*.\*) is selected from the Files of Type: drop down list at the bottom of the dialog box. Then follow the instruction in the "Text Import Wizard", accepting the defaults and a simple Run should look something like this in Excel.

	A	B	C	D	E	F	G
1	BehavePlu	3.0.0	Build 253				
2							
3	Compariso	Thu, Oct 2	11:36:10				
4							
5	Fuel	ROS	Heat per	Fireline	Flame	Max Wind	
6	Model	(max)	Unit Area	Intensity	Length	Exceeded	
7		ch/h	Btu/ft2	Btu/ft/s	ft		
8	5	3.9	274	20	1.8	No	
9	8	1.3	211	5	0.9	No	
10	9	5	416	38	2.4	No	
11	10	3.7	1323	90	3.6	No	
12	tu1	0.3	143	1	0.4	No	
13	tl1	0.6	117	1	0.5	No	
14	FM29	0.4	146	1	0.5	No	
15							

### 10.5.3. Saving a HTML File

Once you have calculated a Run you can save the Run as a HTML file. In addition to the table outputs the HTML file also contains the Input Variables and Run Option Notes sections of the Worksheet. Select the File > saveAs > Results > HTML command to open a standard Windows "Save As" dialog box. You can save this file anywhere, it does not have to be in a BehavePlus Workspace. The .html file extension will be automatically added to your file name.

Simply double-clicking your saved file will display your Run in your Web browser.

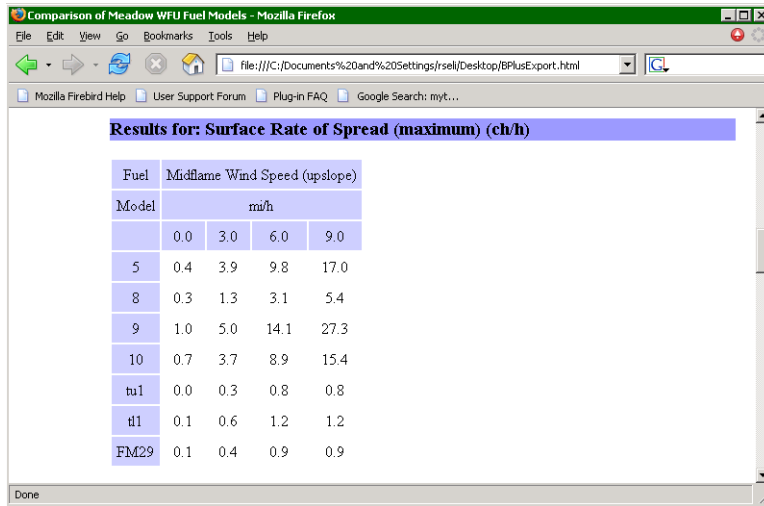

Comparison of Meadow WFU Fuel Models - Mozilla Firefox

file:///C:/Documents%20and%20Settings/rse/Desktop/BPlusExport.html

Results for: Surface Rate of Spread (maximum) (ch/h)

Fuel	Midflame Wind Speed (upslope)			
	m/h			
Model	0.0	3.0	6.0	9.0
5	0.4	3.9	9.8	17.0
8	0.3	1.3	3.1	5.4
9	1.0	5.0	14.1	27.3
10	0.7	3.7	8.9	15.4
tu1	0.0	0.3	0.8	0.8
tl1	0.1	0.6	1.2	1.2
FM29	0.1	0.4	0.9	0.9


Done

# 11. Error checking

If you do something that causes the program to crash, it is a program bug. Please report it through [www.fire.org](http://www.fire.org).



When you do something in error, the program will tell you what the problem is and give you a chance to fix it.

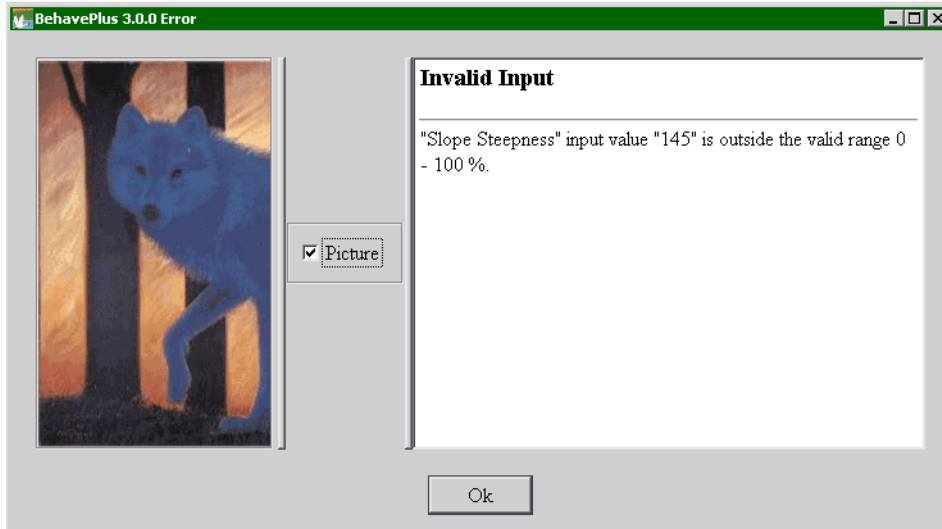

This page blank on purpose.




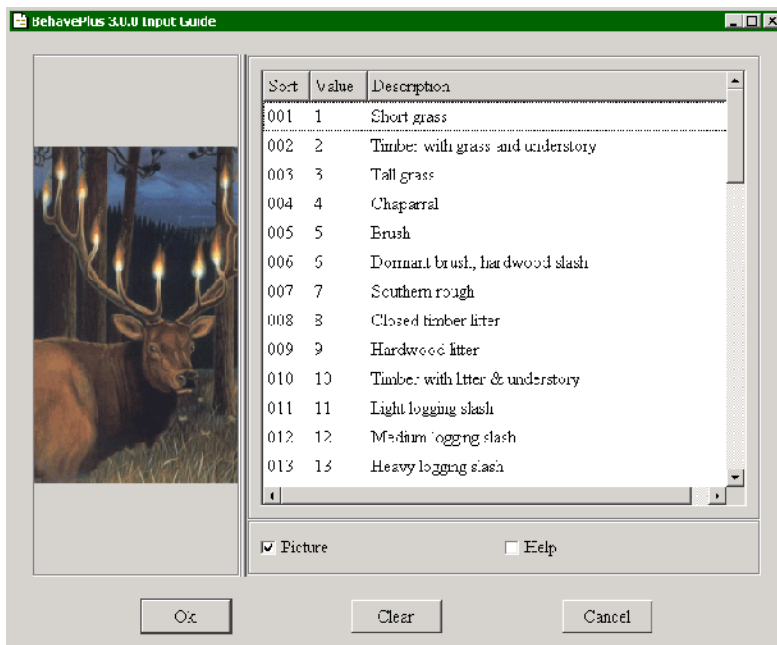
## 12. Fuel models

A fuel model is a set of values that describe a fuel type for the surface fire spread model. The original standard fuel models are numbered 1 through 13. An expanded set of 40 fuel models is also available. Additionally Custom Fuel Models, can be developed, tested, saved, used in BehavePlus, and exported for use in other applications.




### 12.1. 13 Standard fuel models

The original 13 standard fuel models are always available by using the Fuel Model Input Guide  Button or entering the fuel model code directly into the text box from the keyboard. A complete description of the 13 standard fuel models is found in the publication Aids to Determining Fuel Models For Estimating Fire Behavior. Gen. Tech. Rep. INT-122. Anderson, 1982. These fuel models are found at the top of the list in the Fuel Model “Input Guide” dialog box.



### 12.2. Palmetto-Gallberry fuel option


The palmetto-gallberry fuel option estimates fuel parameters from vegetation characteristics. (Hough and Albin 1978) The Palmetto-Gallberry fuel option is not selected from the “Input Guide” dialog box like fuel models, but is selected with the palmetto-gallberry radio button on the Configure > Module selection > SURFACE > Options... > Fuel & Moisture tab.

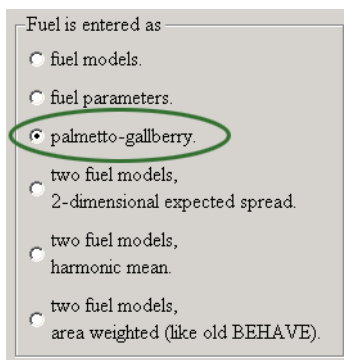

The Palmetto-Gallberry option cannot be used with other fuel models in a Run, it can only be used by itself. Notice that “P-G” has been added to each of the input variables on the Worksheet used specifically for the palmetto-Gallberry fuel model.

### 12.3. Expanded set of 40 fuel models

The expanded set of 40 fuel models is also always available in BehavePlus. These fuel models are also selected from the Fuel Model Input Guide or entered directly in the Fuel Model text box on the Worksheet. They are listed after the original 13 in the “Input Guide” dialog box, but they use an alpha-numeric code rather than a number for the value on the Worksheet.

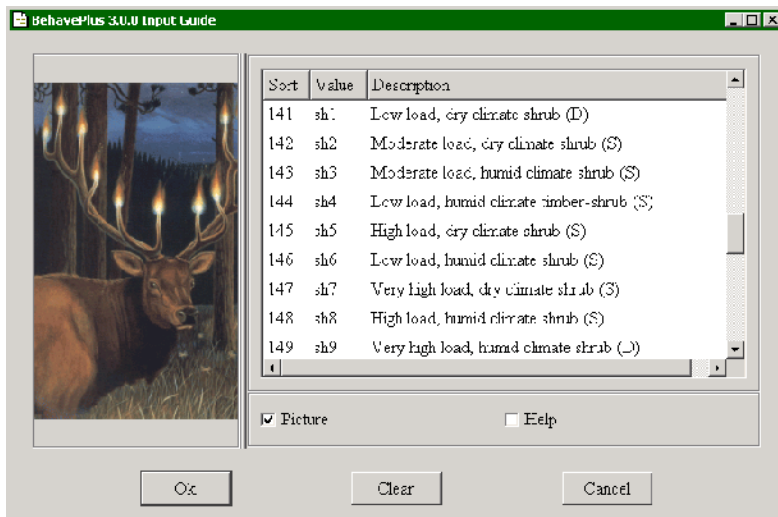

Notice that the expanded models are identified as dynamic or static with a (D) or (S) in the description. See Section 11.4 below for more on dynamic fuel models. An example Run, FuelCompare.bpr, can be found in the ExampleRuns folder to explore the expanded fuel model set and see the effect of dynamic fuel models. A full description of the expanded fuel model set is found in Scott and Burgan, 2004.

### 12.4. Dynamic fuel models

Dynamic load transfer of herbaceous fuel is available in BehavePlus. If the Fuel Model Type is identified as dynamic and contains live herbaceous fuel, then fuel load is transferred from live to dead as a function of the Live Herbaceous Moisture entered on the Worksheet. Dynamic fuel models must have a live herbaceous fuel load while with static fuel models a live herbaceous fuel load is optional.

Dynamic Fuel Model Combinations		Live Herbaceous Fuel Load	
		Yes	No
Fuel Model Type	Dynamic	Ok	n/a
	Static	Ok	Ok

The original 13 standard fuel models are static. In the expanded set models that contains a live herbaceous fuel load are dynamic. The dynamic fuel models are identified by a (D) at the end of their description and a Fuel Model Type parameter of D.

Two output variables are available to help users understand dynamic fuel modeling. Live Herb Load Transfer and Dead Herbaceous Fuel Load can be selected on the Configure > Module selection >

SURFACE > Options... > Outputs tab. A full explanation of dynamic fuel modeling is found in Scott and Burgan, 2004.

BehavePlus 3.0.0 Page 1

Modules: SURFACE

Description [Dynamic fuel model example]

Fuel/Vegetation, Surface/Understory Initialize from a Fuel Model

Fuel Model Type		[D]
1-h Fuel Load	ton/ac	[0.10]
10-h Fuel Load	ton/ac	[0.40]
100-h Fuel Load	ton/ac	[0.00]
Live Herbaceous Fuel Load	ton/ac	[1.50]
Live Woody Fuel Load	ton/ac	[0.00]
1-h Surface Area/Vol Ratio	ft <sup>2</sup> /ft <sup>3</sup>	[1500]
Live Herb Surface Area/Vol Ratio	ft <sup>2</sup> /ft <sup>3</sup>	[1300]
Live Woody Surface Area/Vol Ratio	ft <sup>2</sup> /ft <sup>3</sup>	[1500]
Fuel Bed Depth	ft	[2.00]
Dead Fuel Moisture of Extinction	%	[30]
Dead Fuel Heat Content	Btu/lb	[8000]
Live Fuel Heat Content	Btu/lb	[8000]
<b>Fuel Moisture</b>		
1-h Moisture	%	[ ]
10-h Moisture	%	[ ]
100-h Moisture	%	[ ]
Live Herbaceous Moisture	%	[ ]
Live Woody Moisture	%	[ ]

## 12.5. Custom fuel models

In addition to the standard fuel models you can create, save, and reuse custom fuel models in BehavePlus. These custom fuel models can be exported in a file format used by *FARSITE*, *NEXUS*, and *FlamMap*.


### 12.5.1. Defining and saving custom fuel models

The first step in creating a custom fuel model is to change the Worksheet so that individual fuel parameters are entered in place of the fuel model code. Use the Configure > Module selection > SURFACE > Options... > Fuel and moisture tab and select the fuel parameters. radio button.


Fuel is entered as

- fuel models.
- fuel parameters.
- dynamic palmetto-gallberry.
- two fuel models, 2-dimensional expected spread.
- two fuel models, harmonic mean.
- two fuel models, area weighted (like old BEHAVE).

Or you can load the Example Worksheet FuelModeling.bpw, which has been set up to use fuel parameters, using the File > New command or toolbar button.

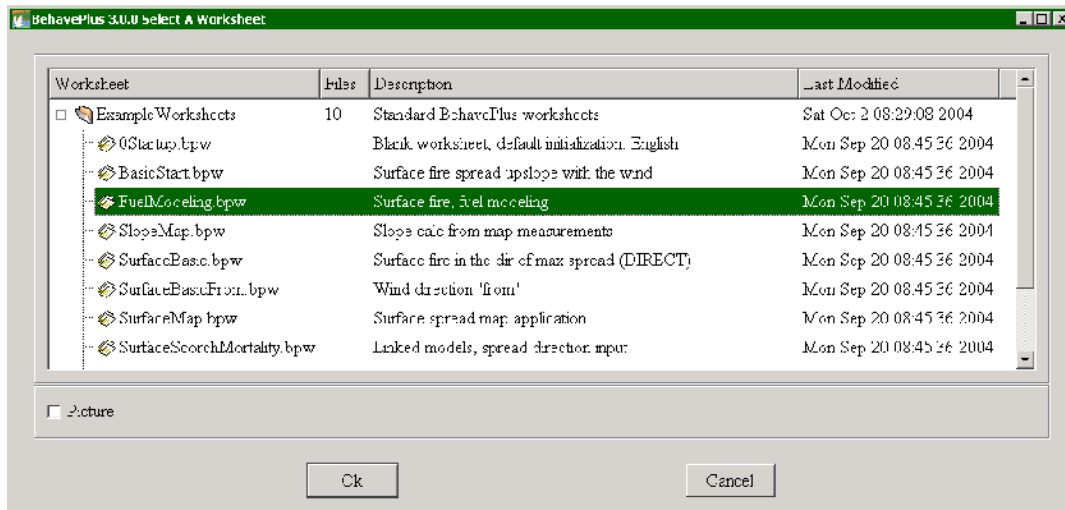

Fuel model parameters can be typed directly into the parameter text boxes. Or they can be initiated with an existing fuel model by clicking the Initialize from a Fuel Model button on the Worksheet.

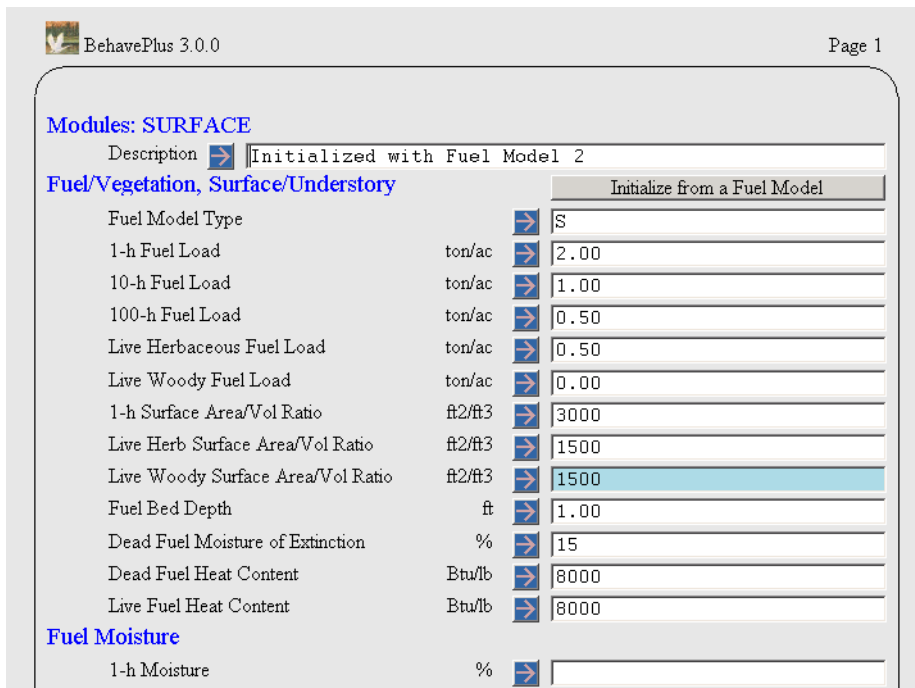

The process of developing a custom fuel model is more complex than just filling in these blanks. It involves a process of evaluation and revision which is not covered in this User's Guide.


Once the fuel model parameters are defined, a custom fuel model can be saved for later use with the File > saveAs > Fuel model > BehavePlus format command. In the "Save As" dialog box enter a file name in the Fuel Model File text box and a short description in the Fuel Model Description text box. If more than one value is assigned to a fuel model parameter for testing purposes, the first value in the list is the one that is saved.

Fuel models should be grouped in folders named by some logical association of meaning to the user. See Section 20.4, Save As, for more information.


## 12.5.2. Using previously saved custom fuel models


In order to use previously saved custom fuel models, the folder in which they are stored must be attached using the Configure > Fuel model set selection command.

Click on a folder's  button to view its fuel model files. Each fuel model is stored in a separate file.

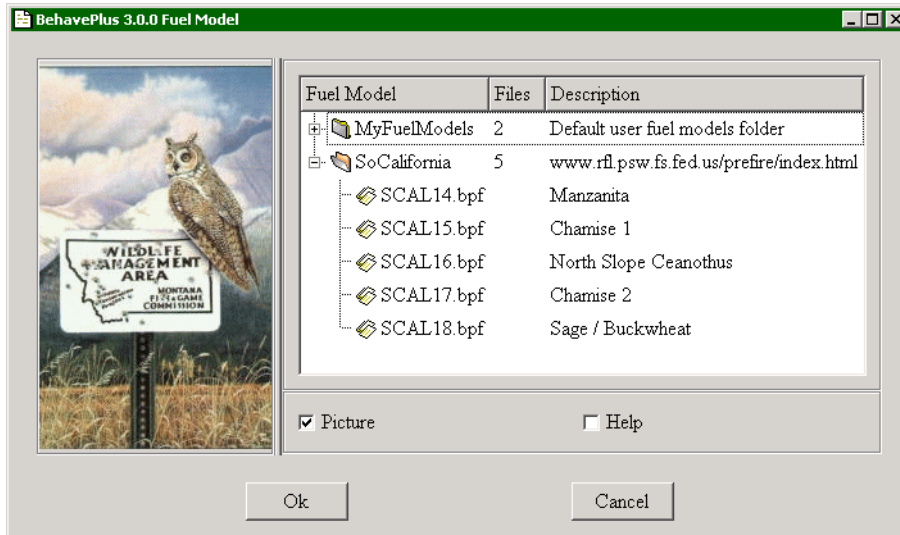

Fuel model files are attached by attaching the folder in which they reside. This makes the fuel models in that folder accessible for use. It is not possible to select and attach individual fuel models; the entire folder must be attached. For example, all the southern California fuel models are attached by selecting the SoCalifornia folder in the “Fuel Model” dialog box and clicking the OK button. Once a fuel model folder is attached, the fuel models appear in the Fuel Model input guide and may be entered as the Fuel Model input variable.

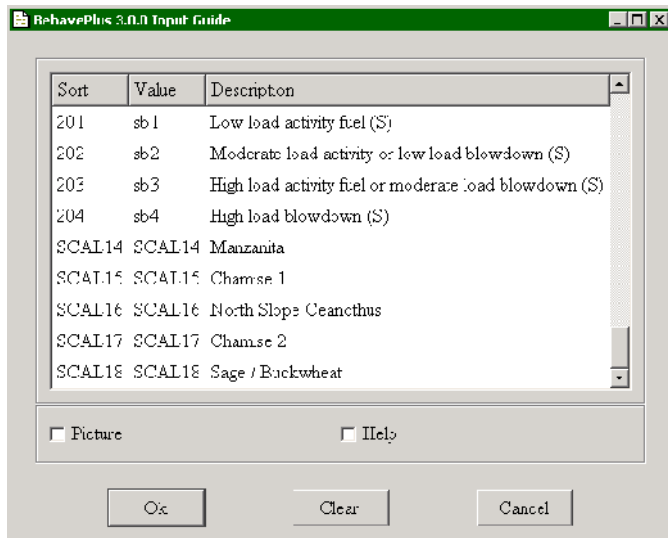


After the SoCalifornia fuel model folder is attached, the Fuel Model input Guide  Button gives the following valid selections for the Fuel Model text box.

To view the parameters of a particular fuel model, right-click on it's name and select the View parameters command from the shortcut menu.

Fuel Model SCAL14	
Fuel Model Name	SCAL14
Description	Manzanita
1-h Fuel Load	3 tons/ac
10-h Fuel Load	4.5 tons/ac
100-h Fuel Load	1.05 tons/ac
Live Herbaceous Fuel Load	1.45 tons/ac
Live Woody Fuel Load	5 tons/ac
1-h Surface Area/Vol Ratio	350 ft <sup>2</sup> /ft <sup>3</sup>
Live Herbaceous Surface Area/Vol Ratio	1500 ft <sup>2</sup> /ft <sup>3</sup>
Live Woody Surface Area/Vol Ratio	250 ft <sup>2</sup> /ft <sup>3</sup>
Fuel Bed Depth	3 feet
Dead Fuel Moisture of Extinction	15 percent
Dead Fuel Heat Content	9211 Btu/lb
Live Fuel Heat Content	9211 Btu/lb

When viewed in the “Fuel Model” dialog box (opened with the Configure > Fuel model set selection command), folders and files with a paper clip icon are currently attached to (i.e., accessible for use by) BehavePlus in the current session. Once the OK button is pressed, only the currently selected folders will have their files attached. Unselected folders will NOT have their files attached, even if they are currently marked as attached by the paper clip icons.

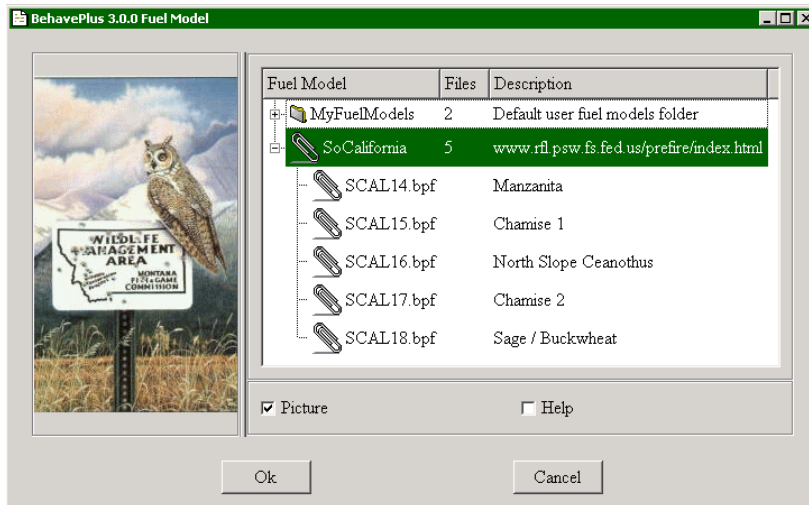

Custom fuel models are selected just like the standard models. They can be selected with the Fuel Model input guide or entering the fuel model code directly into the text box from the keyboard.

BehavePlus 3.0.0 Page 1

**Modules: SURFACE**

Description

**Fuel/Vegetation, Surface/Understory**

Fuel Model

**Fuel Moisture**

Dead Fuel Moisture %


Live Fuel Moisture %

**Weather**

Midflame Wind Speed (upslope) mi/h

**Terrain**

Slope Steepness %

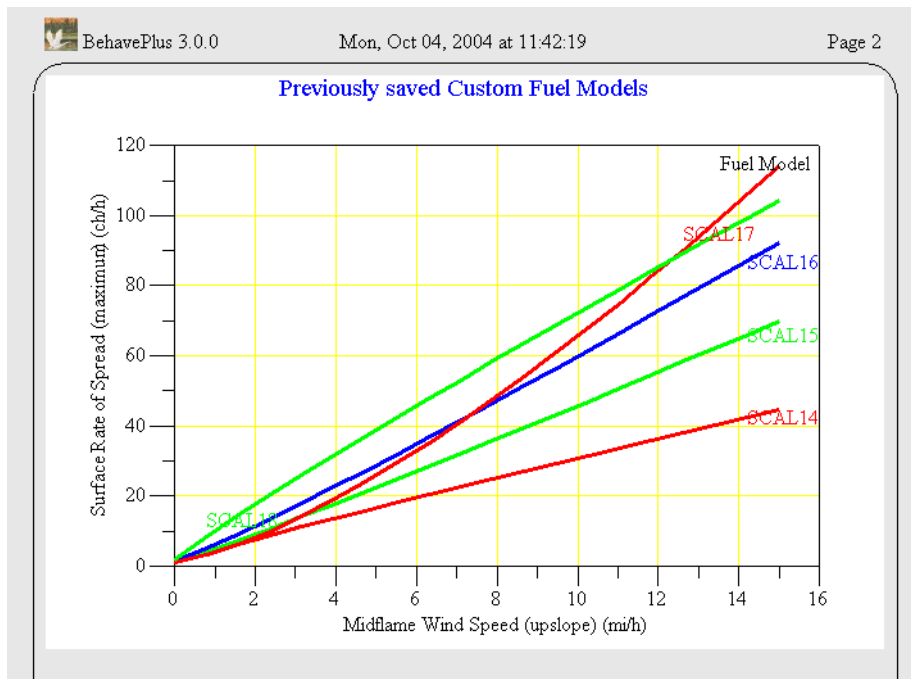


### 12.5.3. Exporting custom fuel models

Custom fuel models you create and save in BehavePlus can be exported in the Custom Fuel Model (.fmd) file format used by *FARSITE*, *NEXUS*, and *FlamMap*. To avoid confusion, remember the distinction between saving and exporting custom fuel models; saving a fuel model lets you reuse it only in another BehavePlus session, while exported fuel models can only be used in an application that uses the Custom Fuel Model (.fmd) file format. Files with a .fmd extension cannot be used in BehavePlus and .bpf files cannot be used in *FARSITE*, *NEXUS*, or *FlamMap*.


Before you can export a BehavePlus custom fuel model it must be saved and attached. See Sections 11.5.2 and 11.5.1 above for information on saving and attaching custom fuel models.

To export a custom fuel model use the File > saveAs > Fuel model > FARSITE format command. In the “Fuel Model Export Selection” dialog box the attached custom fuel models are found at the end of the standard fuel models list.

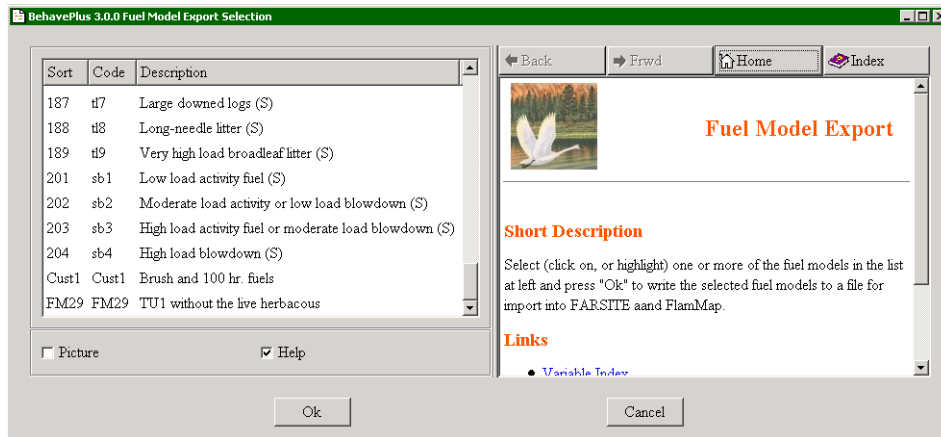

For custom fuel models both the Sort and Code columns in the list display the file name truncated to five characters. You select one or more fuel models to export and then click the Ok button. Type the filename in the “Save As” dialog box and BehavePlus will automatically attach a .fmd extension.

The exported .fmd file will look similar to this when viewed in a text editor.

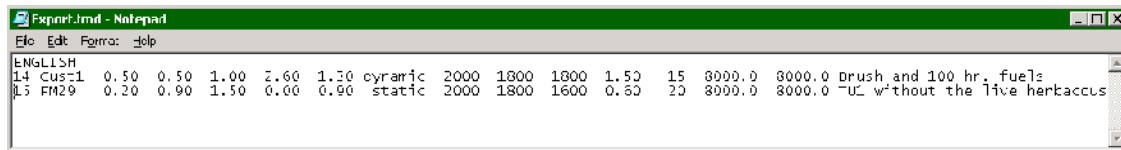

The first field for each fuel model is the fuel model number. Exported fuel models begin with number 14 and continue to 90 if you elect to export that many fuel models. If these fuel model numbers do not match the landscape file in FARSITE or FlamMap you should change these to match by editing the exported .fmd file. You may also want to edit the second field, the fuel model code. The default that is exported is the first five characters of the BehavePlus .bpf filename.



# 13. Moisture scenarios




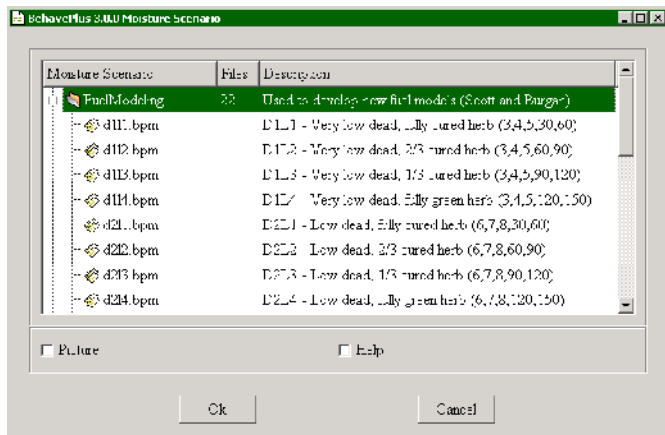
A moisture scenario is a set of fuel moistures for 1-h, 10-h, and 100-h dead fuel and herbaceous and woody live fuel. It is analogous to the fuel model concept in that a single code represents a set of live and dead fuel moisture values. Fuel moisture scenarios may be developed, for example, to represent local 90-, 95-, and 97-percentile weather situations. The set of moisture scenarios used in the old BEHAVE TSTMDL fuel modeling program and the set used to test the expanded standard fuel models are provided with the BehavePlus program.

Fuel model scenarios are for developing and comparing fuel models. They are not designed for fire behavior prediction, in which case actual fuel moisture values should be assigned directly.

## 13.1. Using previously saved moisture scenarios


In order to use previously saved moisture scenarios, the folder in which they are stored must be attached. A folder of moisture scenarios is attached using the Configure > moisture Scenario set selection command to open the "Moisture Scenarios" dialog box.


Click on a folder's  to view its moisture scenario files. Each moisture scenario is stored in a separate file. The details of a moisture scenario can be viewed or printed by right-clicking and selecting the appropriate command from the shortcut menu.




Moisture scenario files are attached by selecting the folder in which they reside and clicking the Ok button in the "Moisture Scenario" dialog box. This makes all the moisture scenarios in that folder accessible for use. It is not possible to select and attach individual moisture scenarios; the entire folder must be attached. For example, one set of the moisture scenarios that come with the BehavePlus program are attached by selecting the FuelModeling folder. Once a moisture scenario folder is attached, its moisture scenarios appear in the Moisture Scenario input guide.


Worksheet options also need to be set to use moisture scenarios. Set up the Worksheet to enter fuel moistures with moisture scenarios using the Configure > Module selection > SURFACE > Options... > Fuel & Moisture tab and select the Moisture is entered by moisture scenario. radio button.

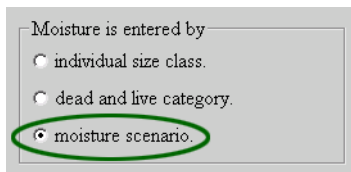


After the FuelModeling moisture scenario folder is attached, the Moisture Scenario Guide  button on the Worksheet shows the following valid selections for moisture scenarios in the "Input Guide" dialog box.

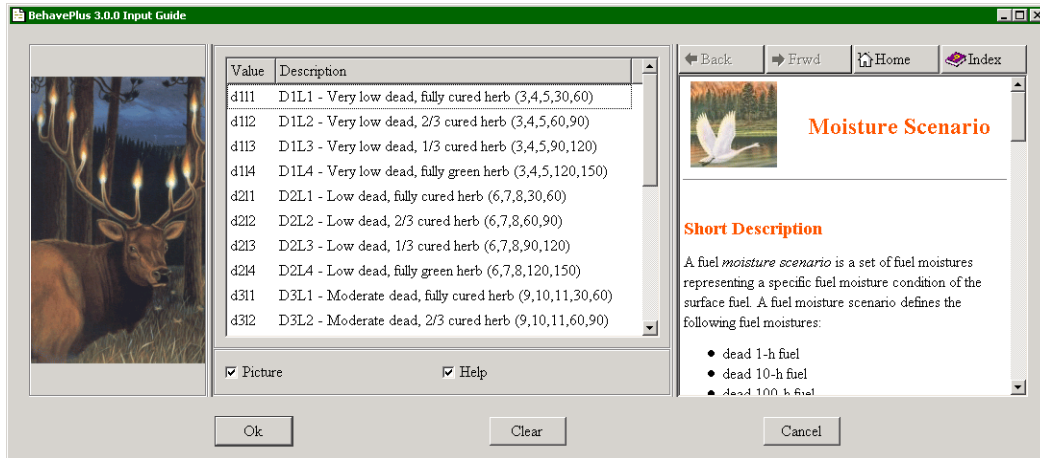

To view the parameters of a particular moisture scenario, right-click on the description and select View parameters from the shortcut men.

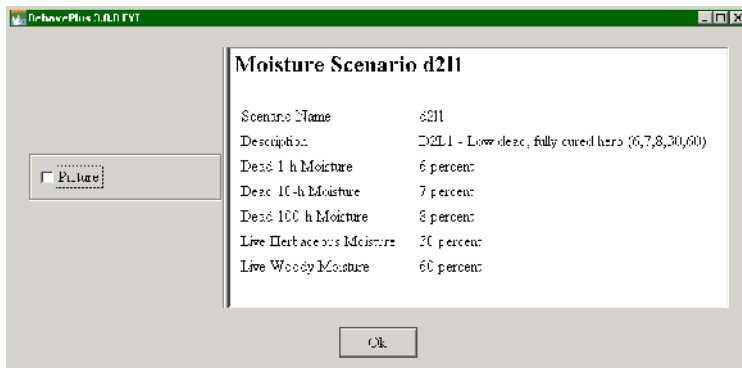

When viewing folders (and files) in the "Moisture Scenario" dialog box, those scenarios with a paper clip icon are currently attached to (e.g., accessible for use by) the BehavePlus application. Once the OK button is pressed, only the selected folders will have their files attached. Currently attached folders will NOT have their files attached if not selected when the OK button is clicked. Use the Cancel button to maintain the current attached sets.

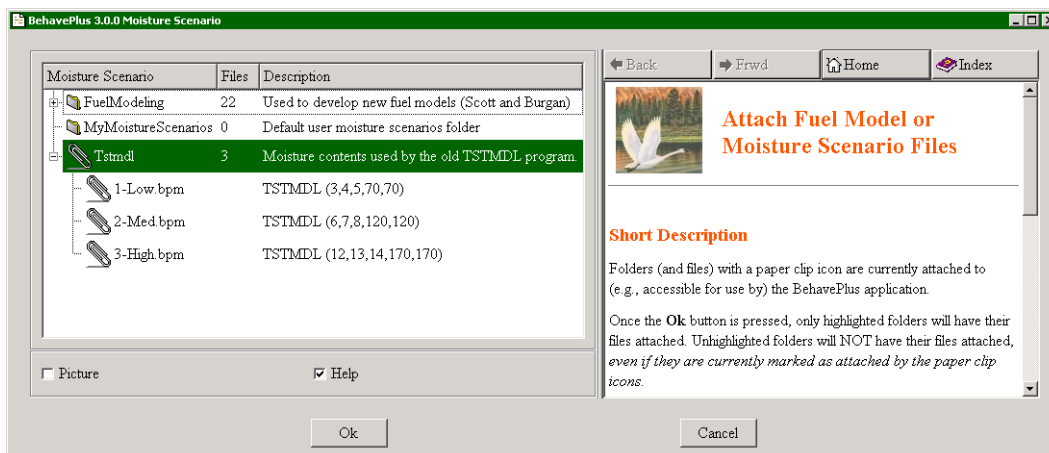

BehavePlus 3.0.0 Mon, Nov 03, 2004 at 11:50:46 Page 1

**Modules: SURFACE**

Description

**Fuel/Vegetation, Surface/Understory**

Fuel Model

**Fuel Moisture**

Moisture Scenario


**Weather**

Michlame Wind Speed (upslope) m/h

**Terrain**

Slope Steepness %

This Worksheet creates the following graph. The fuel model used is a dynamic type, and the output graph indicates the dramatic effect the live moisture can have when using a dynamic fuel model.

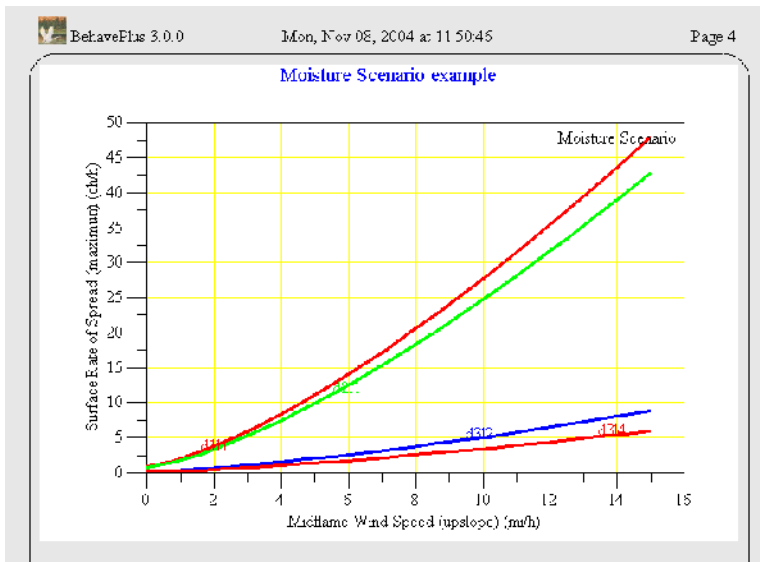

## 13.2. Defining and saving moisture scenarios

To define a Moisture Scenario first set the Worksheet to require individual fuel moisture values by selecting individual size class in the Configure > Module selection > SURFACE > Options... > Fuel & Moisture tab.

Moisture is entered by

individual size class.

dead and live category.

moisture scenario.

Enter values for each size class on the Worksheet, even if that item is shaded. Other input text boxes don't matter.

BehavePlus 3.0.0 Page 1

**Modules: SURFACE**

Description

**Fuel/Vegetation, Surface/Understory**

Fuel Mode.

**Fuel Moisture**

1-h Moisture	%	<input type="text" value="5"/>
10-h Moisture	%	<input type="text" value="5"/>
100-h Moisture	%	<input type="text" value="7"/>
Live Herbaceous Moisture	%	<input type="text" value="90"/>
Live Woody Moisture	%	<input type="text" value="12.1"/>

**Weather**

Midline Wind Speed (up slope) mih

**Terrain**

Slope Steepness %

Save the moisture scenario with the File > saveAs > Moisture scenario command. In the "Save As" dialog box enter a file name in the Moisture Scenario File text box and a short description in the Moisture Scenario Description text box. See Section 20.4, Save As, for more information on saving moisture scenarios.


# 14. Map applications



BehavePlus allows the calculation of slope steepness from map measurements and conversion of distances to map measurements.


Map scale is given as map representative fraction, which is the ratio of the number of units on the map between two points to the distance on the ground between the same two points. For example, if the map representative fraction is 1:24,000, then for each inch on the map there are 24,000 inches on the ground.

Although any value can be entered, the "Input Guide" dialog box provides common map scales, available by clicking the Choices button.

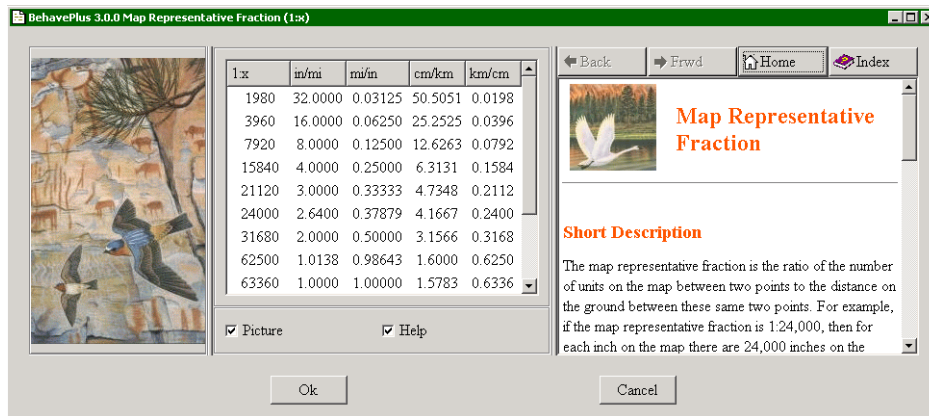


## 14.1. Slope from map measurements


To set up a Worksheet to calculate slope steepness from measurements on a topographic map use the Configure > Module selection > SURFACE > Options... > Slope tab and select the Slope steepness is calculated from map measurements radio button.

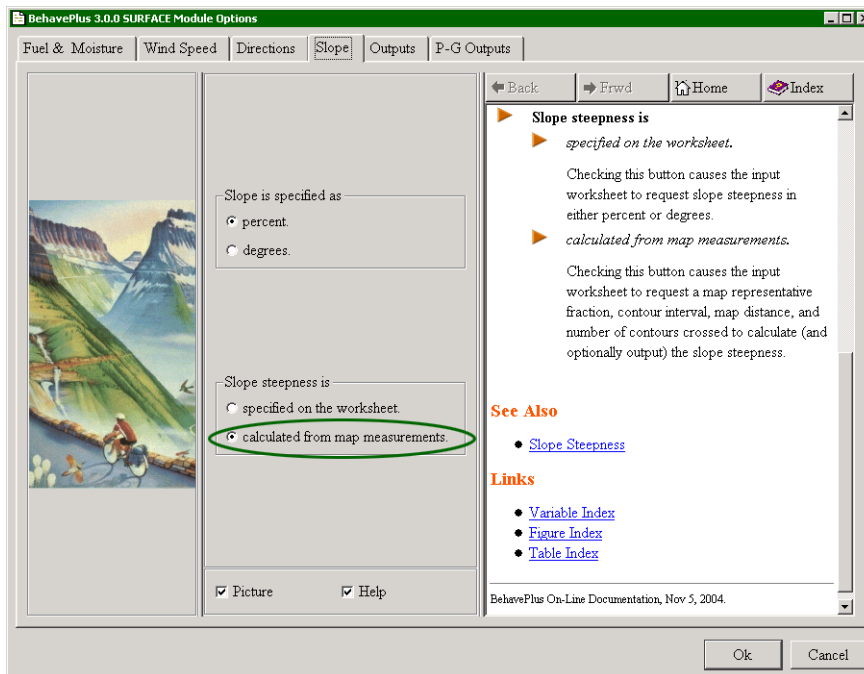

You can add the calculated slope steepness and intermediate values to the output list with the Configure > Module selection > SURFACE > Options... > Outputs tab. Select any or all of the Slope Steepness, Slope Elevation Change, or Slope Horizontal Distance check boxes.

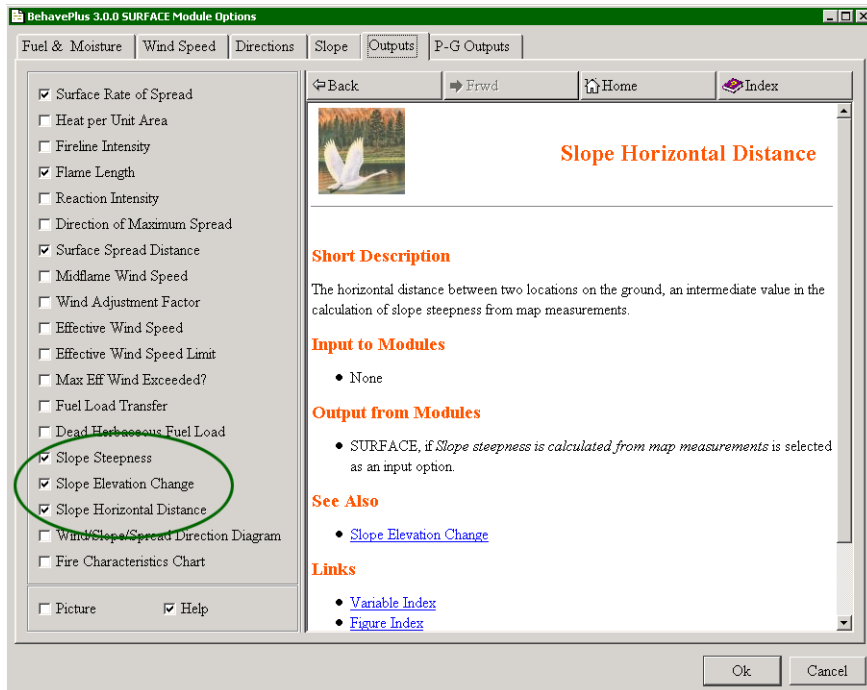

The Worksheet then includes a Map section with text boxes for data.

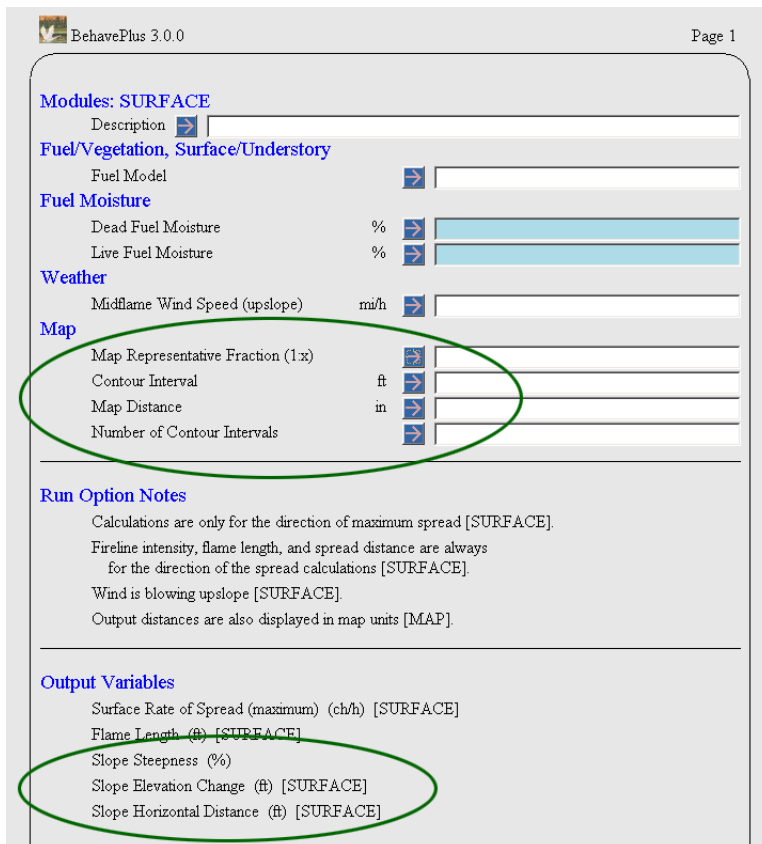


The contour interval is the difference in elevation between adjacent topographic contours on a topographic map.

The map distance is the distance between two points on a map generally expressed in inches or centimeters.


Number of contour intervals is a count between two points on a map.

If only slope values are requested as output, then only Map input variables are requested. An existing Worksheet, SlopeMap.bpw, showing this configuration is found in the ExampleWorksheets folder.

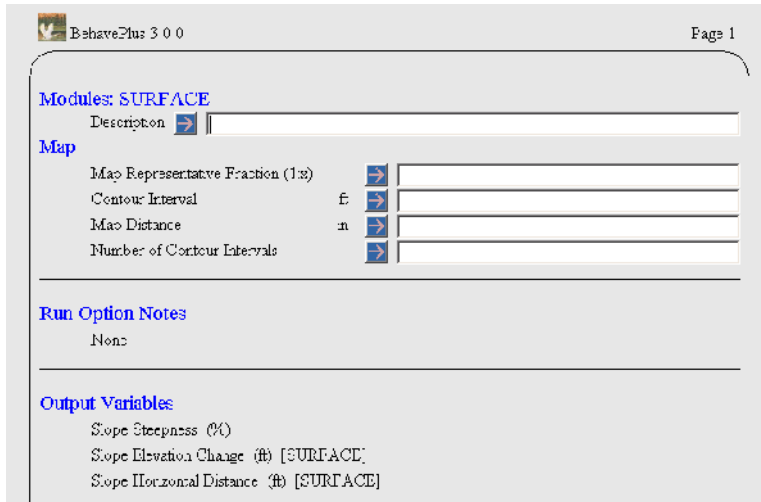

## 14.2. Map distances

To specify that output calculated distances should also be given in map units use the Configure > Module selection command and select the Display output distances in map units check box below the list of modules.

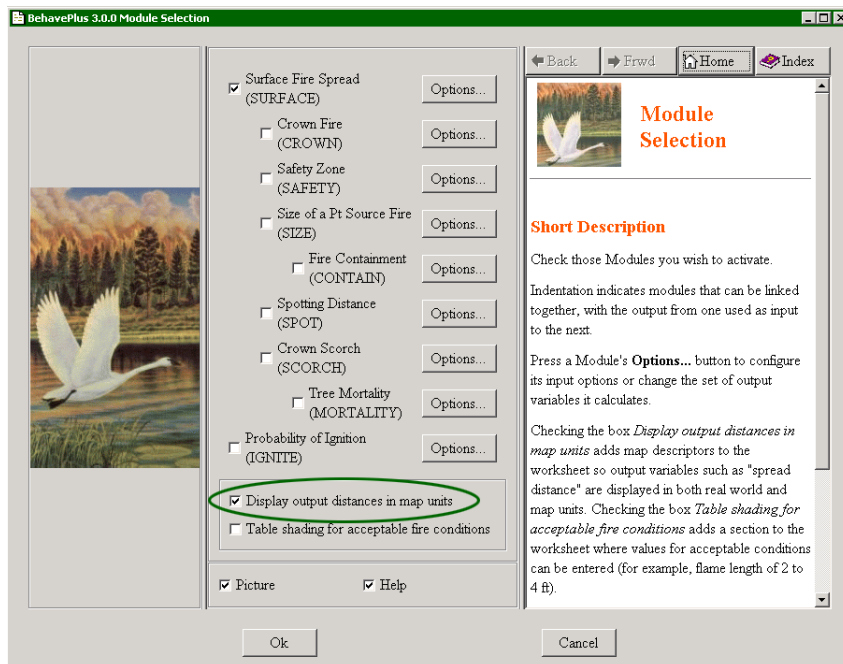

When a distance is calculated in SURFACE, SIZE, or SPOT and the Display output distances in map units check box is selected, a Map Representative Fraction (1:x) text box is added to the Worksheet and map distances are added to the list of output variables.

For example, when the Spread Distance check box is selected in the Configure > Module selection > SURFACE > Options... > Outputs tab the following Worksheet results:

BehavePlus 3.0.0 Page 1

**Modules: SURFACE**

Description

**Fuel/Vegetation, Surface/Understory**

Fuel Model

**Fuel Moisture**

Dead Fuel Moisture %

Live Fuel Moisture %

**Weather**

Midflame Wind Speed (upslope) mi/h

**Terrain**

Slope Steepness %

**Fire**

Elapsed Time h

**Map**

Map Representative Fraction (1x)

---

**Run Option Notes**

Calculations are only for the direction of maximum spread [SURFACE].

Fireline intensity, flame length, and spread distance are always for the direction of the spread calculations [SURFACE].

Wind is blowing upslope [SURFACE]

Output distances are also displayed in map units [MAP].

---

**Output Variables**

Surface Rate of Spread (maximum) (ch/h) [SURFACE]

Surface Spread Distance (ch) [SURFACE]

Surface Spread Map Distance (in) [SURFACE]



## 15. Units



Default units for BehavePlus are English for use in the United States. It is easy to change all units to metric using the `Configure > Units > Metric` command.

If a user wishes to use something other than the units we have selected for English or metric, a custom set of units can be defined and saved for later use.

The Units set also defines the number of decimal places displayed for each variable.

Note that whenever a Worksheet or Run is saved, its current units of measure and display decimals are saved with it. The next time you open the Worksheet or Run, the units and decimal settings are restored.

BehavePlus also provides a quick units conversion tool accessed with the `Tools > Units converter` command.

### 15.1. English or metric

The units set can be changed using the `Configure > Units > English or Metric or Custom` commands.

Immediately upon change, the units on the active Worksheet and all values that have been entered are changed.

Because units are stored with a Worksheet or Run, if units are changed to metric and then another Worksheet is loaded from the `ExamplesWorksheets` folder, with the `File > New` command, the new Worksheet will be English units.

### 15.2. Custom units set

Develop and save a custom units set using the “Units Editor” dialog box opened with the `Tools > units Editor` command.

The Units editor controls the selection of units of measure and decimal places for the input, display, and output of variables. The selected units are then applied to the current Worksheet and saved as a custom units set.

The units of measure initially displayed by the dialog are those in use for the current Worksheet.


Select the desired units for each variable set. Rather than repetitiously having to enter units for every variable, they are grouped by type of unit of measure.

Once you have defined and saved a custom units set, you can apply it to a Worksheet or Run with the `Configure > Units > Custom` command that opens the “Select A Units Set” dialog box.

### 15.3. Number of decimal places


In addition to setting units of measure, the “Units Editor” dialog box also allows you to change the number of digits displayed after the decimal place of all input and output variables.

For example, fire area has 1 decimal place as the default. You may want to round area to the nearest acre by changing the number of decimals to 0.

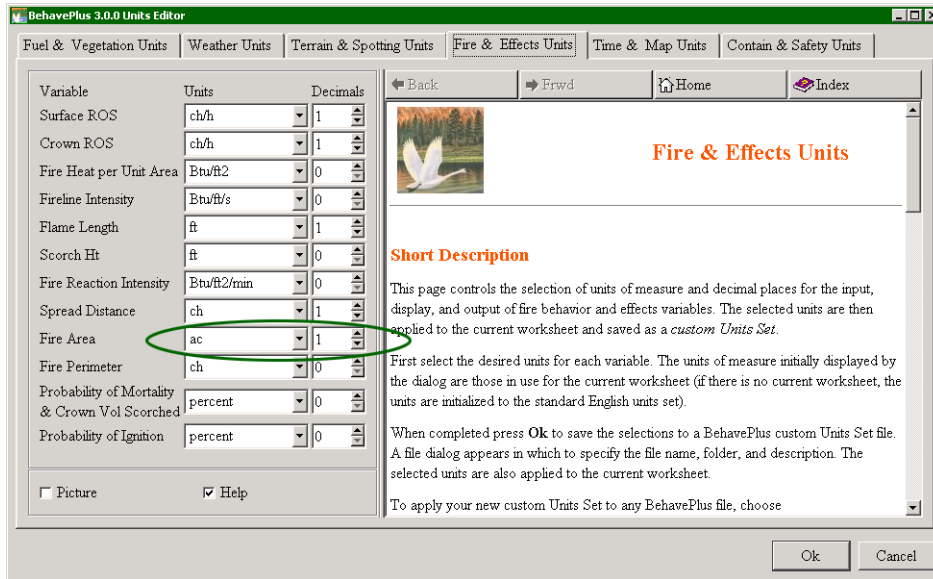

### 15.4. Units conversion tool

For all those times when somebody gives you an observed spread rate in furlongs/fortnight or you just need to know what the temperature is at that Canadian RAWS station just across the border, BehavePlus has a utility you can reach with the Tools > Units converter command.

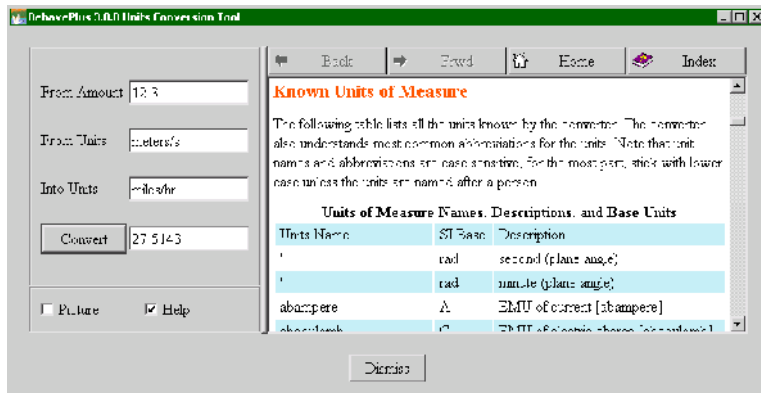

In the “Units Conversion Tool” dialog box enter your known observation into the From Amount and From Units text boxes (12.3 meters per second in the above example). Then enter the desired units in the Into Units text box and click the Convert button to get your results (27.5143 miles per hour in the above example).

In the “Help” pane of the “Units Conversion Tool” dialog box there is a list of all the available units.


# 16. Language



The FIRE1 program of the old BEHAVE system was translated into several languages including Spanish and Chinese. We have designed BehavePlus to make the translation process easier. A Portuguese translation is included as an example. Instructions are available for translation to other languages. This translation process applies to the program interface itself, not to the help files.

## 16.1. English or Portuguese

To change the language from the default English to Portuguese use the Configure > Language > Portuguese (Portugal) command.

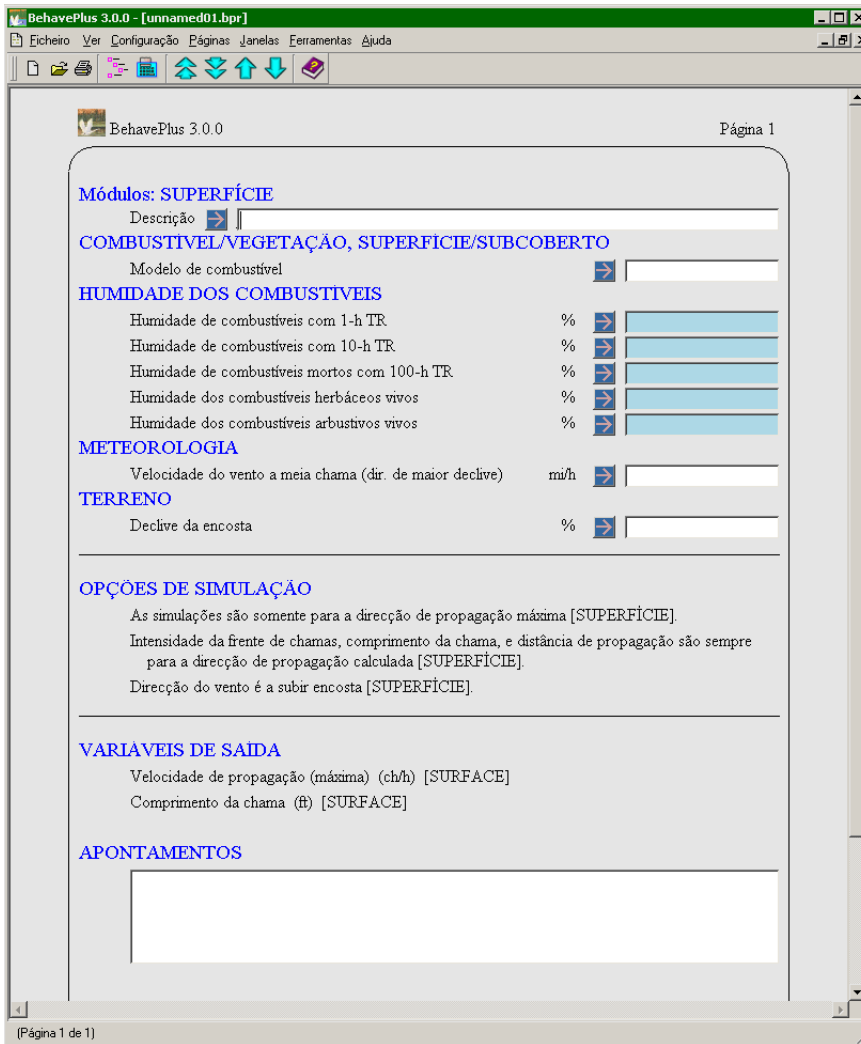


Sample Portuguese output table.

BehavePlus 3.0.0      Thu, Jun 02, 2005 at 11:50:36      Página 3

**Comprimento da chama (m)**

Combustível	Humidade dos combustíveis herbáceos vivos	
Modelo	30	150
	%	
2	2.5	2.0
tu1	0.6	0.2
tu3	2.1	1.7

Sample Portuguese output graph.

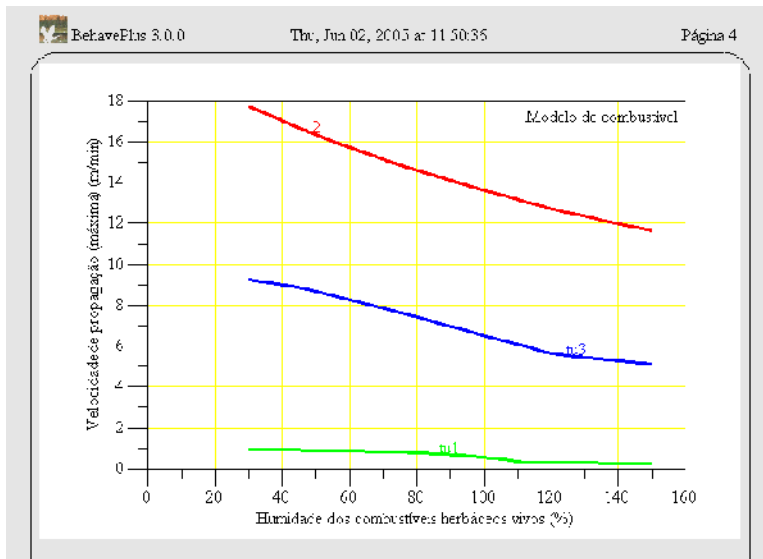

## 16.2. Custom language set


To develop a custom language set contact Collin Bevins at [cbevins@montana.com](mailto:cbevins@montana.com).

# 17. Fine Dead Fuel Moisture Tool



This tool is an automation of only the *daytime* tables from Rothermel (1983). Since these tables are not based on equations, they can't effectively be linked to any other tools or modules in BehavePlus.

The "Fine Dead Fuel Moisture Tool" dialog box can be accessed with the Tools > Fine dead fuel moisture command.

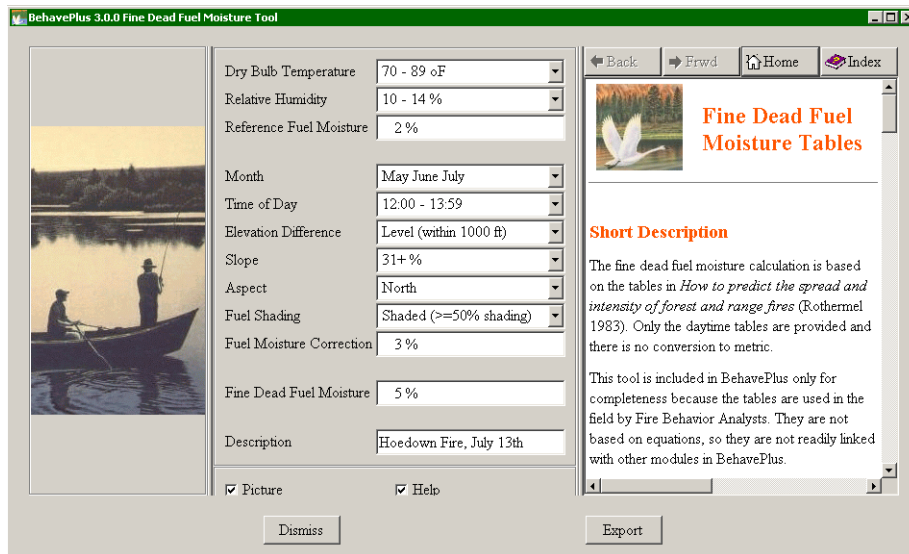


Inputs are made through the drop down lists. As soon as a change is made, the results are displayed.

## 17.1. Saving and Documenting

You can save fine dead fuel moisture inputs and results as a HTML file by clicking the Export button.


The Description text box at the bottom of the input section allows you to describe a header for the saved results.

When the Export button is clicked, a "Save As HTML" dialog box appears.

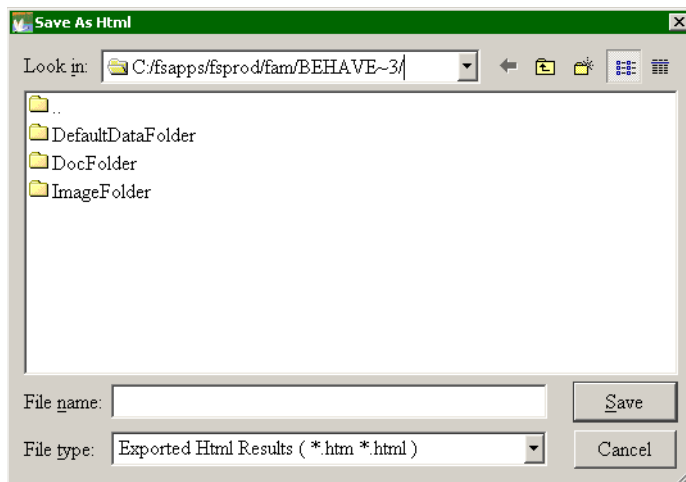

You may navigate to any drive or directory and select an existing file or specify a new file name. The default location for exporting is your BehavePlus3 folder. If you haven't already done so, you should think about your file management and design a structure for you project. (see Chapter 20: File Management)


If you select an existing file, a popup will ask you to confirm overwriting the existing file. If you specify a new file without a “.html” or “.htm” extension, a “.html” extension is automatically added. The contents of the “Fine Dead Fuel Moisture Tool” dialog box are then written to the file in HTML format.

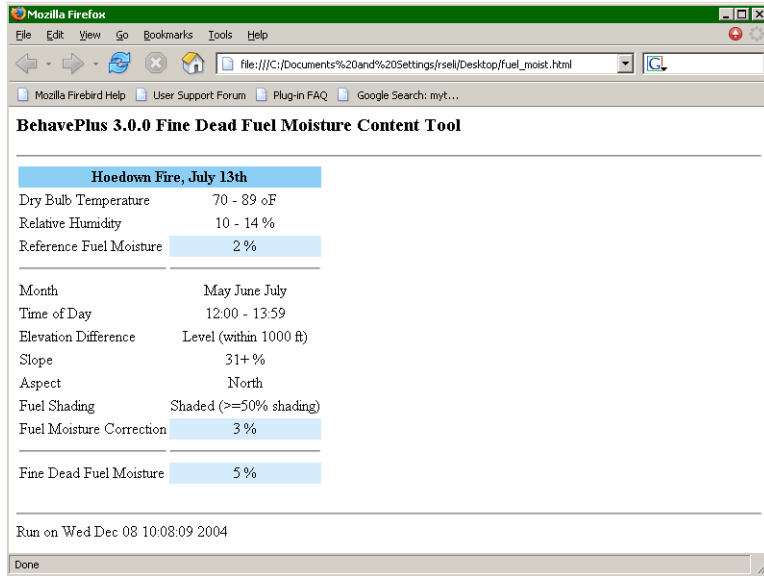

You may view the results using any web browser such as FireFox, Mozilla, or even Internet Explorer. You may also attach the file to E-mail, or post it to a web site.

## 18. RH Tool

The “Relative Humidity” dialog box is opened with the Tools > Relative humidity command.

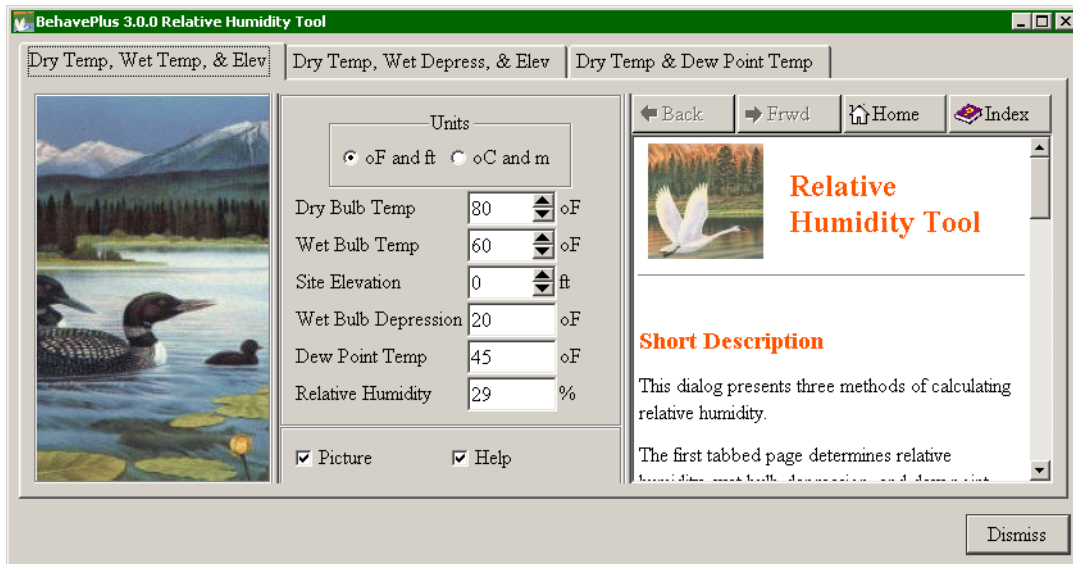

The “Relative Humidity” dialog box provides three ways to calculate relative humidity depending on available inputs, a tab for each method.

- All three methods require Dry Bulb Temperature as an input.
- The first tab utilizes a Wet Bulb Temperature input, the Dry Temp, Wet Depress, & Elev tab uses the Wet Bulb Depression (the difference between Wet and Dry Bulb Temperatures), and the third tab uses the Dew Point Temperature.
- The first and second tabs also require the Elevation of the temperature observations.

On all three tabs the spin boxes are used to enter the required inputs. The plain text boxes display the outputs and immediately change with input changes.

Remember the RH Tool is a stand alone utility, it does not link to any other tools or modules.


This page left blank on purpose.



# 19. Sun-Moon Calendar Tool




The "Sun-Moon Calendar" dialog box is opened with the Tools > Sun-moon calendar command.

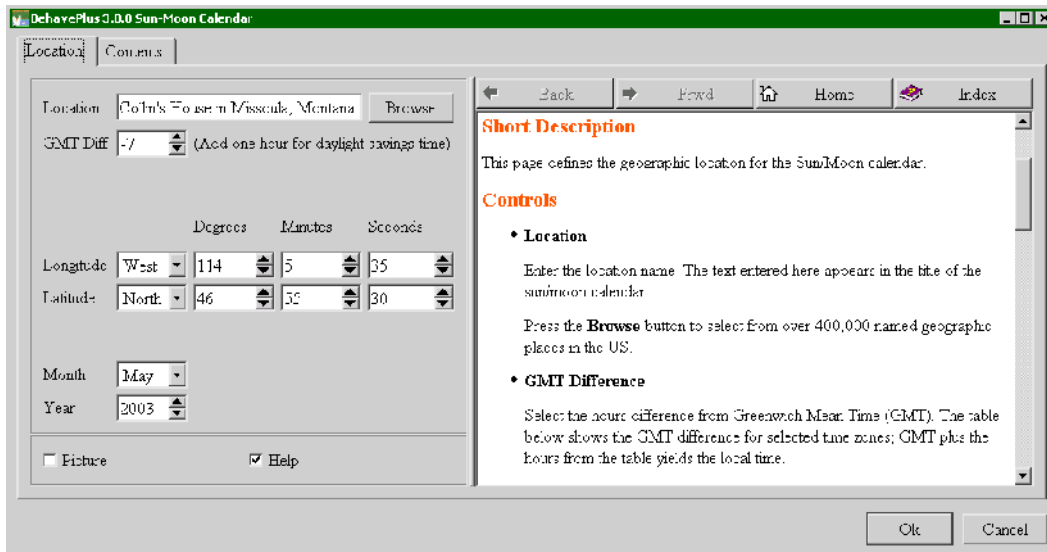

The Location tab allows you to specify any month of any year at a location on the globe. The tool also includes a large database of named places within the United States so you can select a location by name rather than by coordinates.

The Contents tab lets you select the outputs you need.

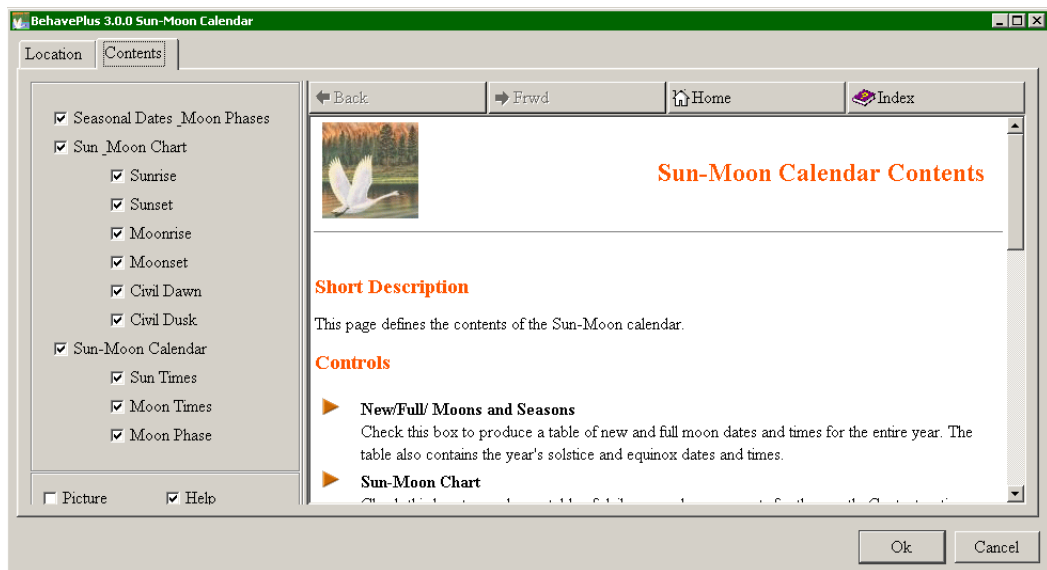

You can generate sun-rise, sun-set, civil dawn, civil dusk, moon-rise, and moon-set times in table or calendar format. It can also display a table of equinox, solstice, and moon phases for the year.

Example table of sun-rise, sun-set, civil dawn, civil dusk, moon-rise, and moon-set times.

Page 2

**Sun & Moon Chart**  
**Collin's House in Missoula, Montana**  
**June 2005**  
 (Lon 114.093, Lat 46.925, GMT -7.0)

Day	Sunrise	Sunset	Moonrise	Moonset	Civil Dawn	Civil Dusk
Wed 1	04:45	20:23	02:15	14:57	04:06	21:02
Thu 2	04:44	20:24	02:31	16:10	04:06	21:03
Fri 3	04:44	20:25	02:49	17:25	04:05	21:04
Sat 4	04:43	20:26	03:10	18:38	04:04	21:05
Sun 5	04:43	20:26	03:35	19:51	04:04	21:06
Mon 6	04:42	20:27	04:06	20:58	04:03	21:06
Tue 7	04:42	20:28	04:46	21:58	04:03	21:07
Wed 8	04:41	20:28	05:36	22:46	04:02	21:08
Thu 9	04:41	20:29	06:35	23:24	04:02	21:09
Fri 10	04:41	20:30	07:40	23:53	04:02	21:10
Sat 11	04:41	20:30	08:47		04:01	21:10
Sun 12	04:41	20:31	09:55	00:16	04:01	21:11
Mon 13	04:40	20:31	11:02	00:35	04:01	21:11
Tue 14	04:40	20:32	12:09	00:51	04:01	21:12
Wed 15	04:40	20:32	13:17	01:06	04:01	21:12
Thu 16	04:40	20:33	14:26	01:21	04:01	21:13
Fri 17	04:40	20:33	15:40	01:38	04:01	21:13
Sat 18	04:40	20:33	16:50	01:56	04:01	21:14
Sun 19	04:41	20:34	18:20	02:20	04:01	21:14
Mon 20	04:41	20:34	19:43	02:52	04:01	21:14
Tue 21	04:41	20:34	20:58	03:36	04:01	21:14
Wed 22	04:41	20:34	22:00	04:36	04:02	21:15
Thu 23	04:41	20:34	22:45	05:53	04:02	21:15
Fri 24	04:42	20:35	23:19	07:19	04:02	21:15
Sat 25	04:42	20:35	23:44	08:46	04:03	21:15
Sun 26	04:43	20:35	----	10:10	04:03	21:15
Mon 27	04:43	20:34	00:04	11:31	04:03	21:15
Tue 28	04:44	20:34	00:21	12:47	04:04	21:14
Wed 29	04:44	20:34	00:38	14:02	04:04	21:14
Thu 30	04:45	20:34	00:55	15:16	04:05	21:14

# 20. File management




## 20.1. Workspaces

BehavePlus has a proscribed file system structure; all files must be located in specific subdirectories. The parent directory of this file structure and all its subdirectories and files are collectively known as a Workspace.

A Workspace is a complete subdirectory tree containing all required BehavePlus files plus any additional Worksheet, Run, Fuel Model, Moisture Scenario, Units Set, or screen capture files saved by the user. A Workspace corresponds to a single BehavePlus project, and each BehavePlus project should have its own Workspace. Workspaces are created with either the File > Workspaces > New workspace or Clone current workspace commands.

When BehavePlus is first installed it has a single Workspace called the "DefaultDataFolder". This is the default current Workspace every time BehavePlus is started.

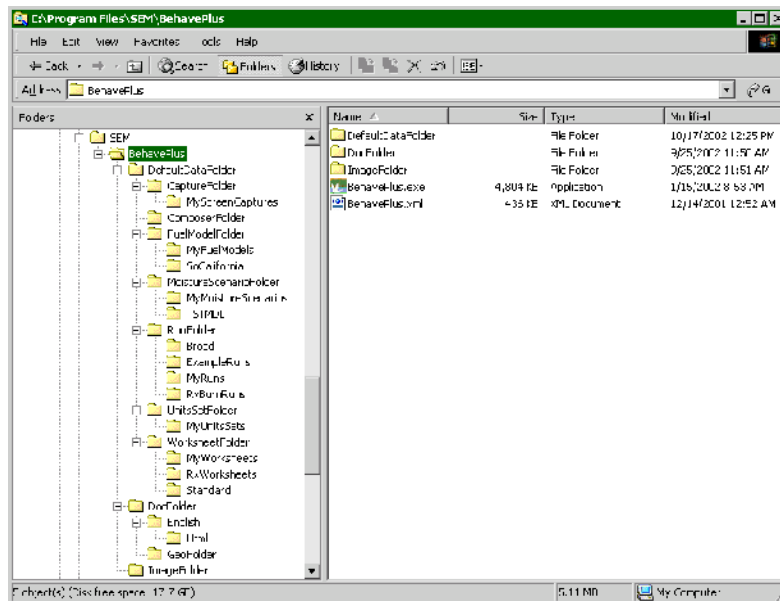

We recommend you create a new Workspace using the File > Workspaces > New Workspace command for every BehavePlus project you're working on. A project can be a collection of fire behavior projections for a wildfire or a fuels analysis for an environmental impact statement. The new, "pristine" Workspace is automatically populated with all example Worksheets, example Runs, and standard and predefined custom fuel models just like the DefaultDataFolder Workspace.

Alternatively, you may clone an existing Workspace with the File > Workspaces > Clone current workspace command to copy all of the current Workspace into a new Workspace, including all Run, Units Sets, custom Fuel Models, and custom Moisture Scenarios.

The Workspace concept provides the following benefits:

- All files pertaining to a specific training class, fire situation, or other project are segregated into their own file structure.
- Workspaces are easily backed up or copied onto removable media using either the File > Workspaces > Clone current workspace command or Windows Explorer.
- BehavePlus has self-validation tests and informs you whenever it is missing required files.
- BehavePlus knows where to find all custom Fuel Models and Moisture Scenarios and include them in Guide Button dialog boxes.

We recommend using a compression utility such as WinZip, PKZip, or gzip when E-mailing or moving a Workspace over the Internet as compression significantly reduces BehavePlus file sizes.

A list of three letter file extensions used by BehavePlus is shown in the following table. These extensions are automatically attached to the files you create in BehavePlus.

File extension	File type	Folder
.bpf	Custom fuel models	FuelModelFolder
.bpm	Moisture scenarios	MoistureScenarioFolder
.bpw	Worksheets	WorksheetFolder
.bpr	Runs	RunFolder
.bpu	Custom Units Sets	UnitsSetFolder
.exe	Executable program file	BehavePlus
.png	Portable network graphic image format	MyScreenCaptures
.bmp	Bitmap graphic image format	MyScreenCaptures
.jpg	JPEG graphic image format	MyScreenCaptures
.xml	Extensible Markup Language	Various places

## 20.2. Load a Worksheet

A previously saved Worksheet is loaded with the File > New command, which opens the “Select a Worksheet” dialog box.

The Worksheet is 'blank' in that none of the input variables have been assigned values. But all of the associated options are still part of the Worksheet (e.g., graph appearance).

## 20.3. Load a Run


A previously saved Run is loaded through File > Open Run command, which opens the “Select a Run” dialog box.


A Run is a Worksheet with valid values assigned to all input variables. Calculated values, tables, graphs, and diagrams are not saved. These are generated with the File > Calculate command.

## 20.4. Save as...

A sub-menu of the File > saveAs command offers many choices of what to save from the active Worksheet or Run:

- Run
- Worksheet
- Fuel models
- Moisture scenario
- Results
- Image

A Run can be saved only if all valid values have been assigned to all variables on the Worksheet. The Run can be opened at a later time using the File > Open Run command or the  toolbar button.

When a Worksheet is saved, it is saved without any values assigned to input variables. The Worksheet can be opened at a later time using the File > New command or the  toolbar button.


Fuel models can be saved in either BehavePlus or the FARSITE Custom Fuel Model (.fmd) format. Before saving a fuel model make sure the SURFACE module check box is selected and the fuel parameters check box is selected in the Fuel is entered as section of the SURFACE > Options... > Fuel & Moisture tab. Valid values must be assigned to each fuel model parameter. Also make sure the Fuel Model Type parameter is correct, dynamic (D) fuel models must have a live herbaceous fuel load. (see Section 12.4) To use custom fuel models at a later time they must be attached with the Configure > Fuel model set selection command. (see Section 12.5.2)

Before saving a moisture scenario make sure the SURFACE module is selected and the individual size class check box is selected in the Moisture is entered by section of the SURFACE > Options... > Fuel & Moisture tab. Valid values must be assigned to each size class, even those that are shaded. To make a moisture scenario available use the Configure > moisture Scenario set selection command. (See Section 13.2)


Table results can be saved to a tab delimited text file or HTML file. The text file can then be imported into another application, such as word processor, spreadsheet, or database. The HTML file can be used in a Web page or is a handy, compact way to E-mail your BehavePlus results. (See Sections 10.5.2 and 10.5.3)

Images of table, graph, and diagram screens can all be saved as an image file. The image file can then be edited with an image processor or inserted into word processor or layout documents. (See Section 10.5.1)

The following example saves a Worksheet. The process is similar for other file types. The File > saveAs command requests input of folder name, file name, file description, or file type in the "Save As" dialog box.

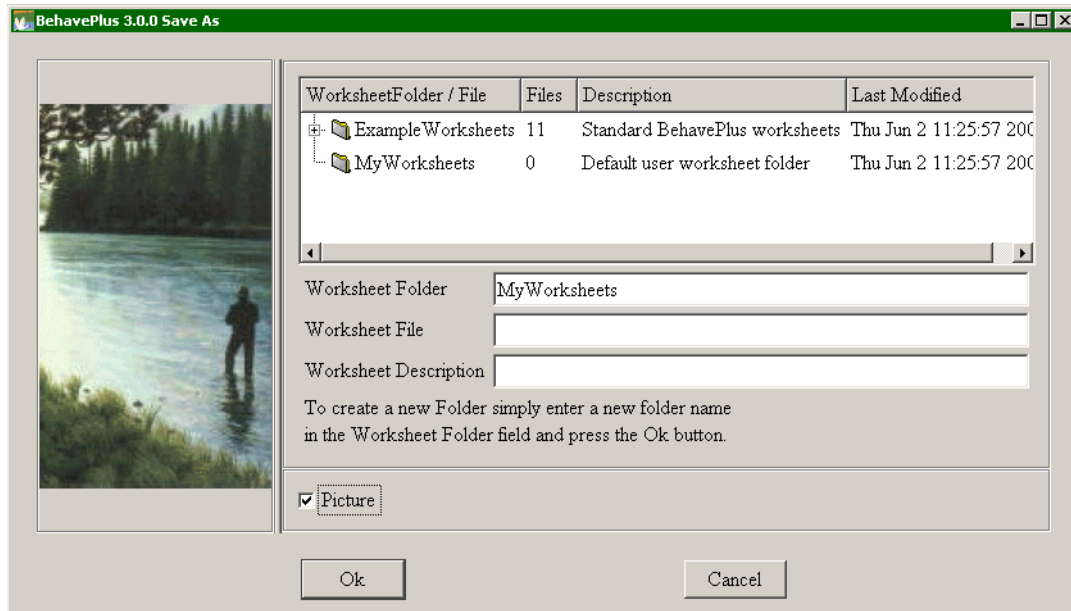

In this case, the Worksheet Folder text box is initially set to MyWorksheets. To create a new folder, simply type a new name into the Worksheet Folder text box: TestFolder in the example below.

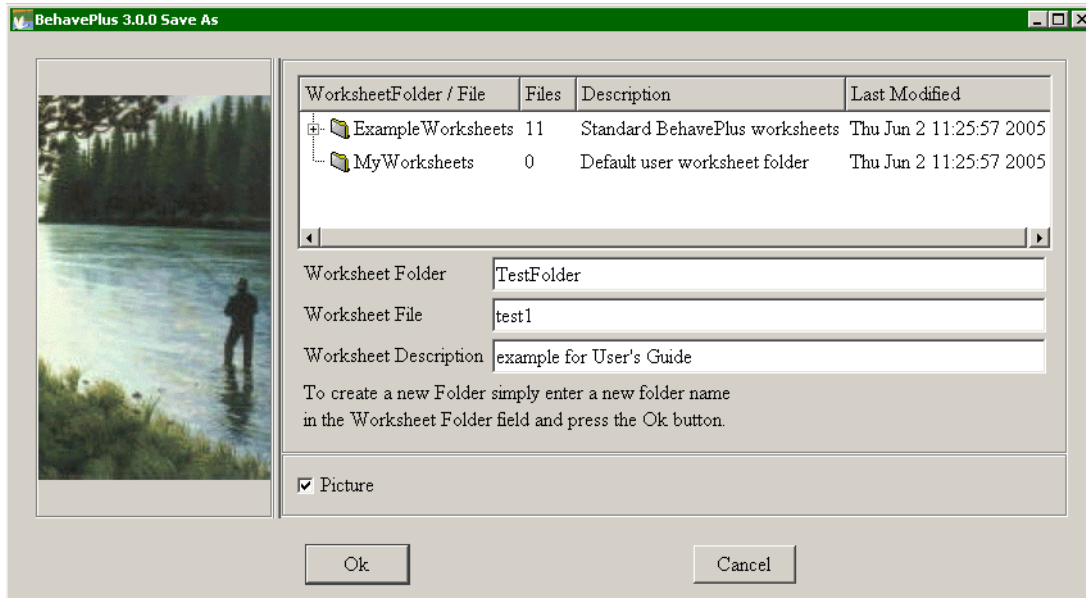

You are asked to enter a Worksheet folder description. The folder description subsequently appears in the file selection dialog box as a reminder of its contents. The Worksheet description is initially set to whatever is in the Description text box on the Worksheet. When saving a Worksheet, you should assure that it describes the blank Worksheet, not the specific Run.


To export your table output as a spreadsheet or HTML document use the File > saveAs > Results commands.

## 20.5. Deleting Files & Folders

Files and folders in a BehavePlus Workspace are deleted using Windows Explorer. However you should only delete files and folders you create, not any of the files and folders BehavePlus automatically creates for the Workspace.

# 21. Help



Help features are a primary feature of BehavePlus. The Users Guide is available from the menu bar, and all dialogs and wizards include a help browser pane. Input fields include a Guide  button for help in entering range inputs or selecting one or more discrete choices.

## 21.1. Browser pane help

The right-hand pane of many BehavePlus dialog boxes is a help browser. These can be printed by right-clicking in the help window to display a shortcut menu and selecting the appropriate command.




It includes a description of input variables when the guide button associated with the variable on the Worksheet is clicked. It includes a description of output variables when the cursor is held over a variable name on the list of possible output variables for a MODULE, reached through Configure > Module selection > MODULE > Options... > Outputs tab.

For each variable, information includes

- Short description
- Input to modules
- Output from modules
- More Information
- See also
- Links


## 21.2. Guide button

Help on entering a specific Worksheet variable is available by pressing the Guide  button next to each Worksheet entry field to activate an "Input Guide" dialog box containing a help browser pane and input

assistance. For continuous variables, the dialog facilitates entry of a large number of inputs by specifying the minimum input value, maximum input value, and increment value.



Additional values are sometimes displayed by clicking the Choices button where available in the "Input Guide" dialog box.

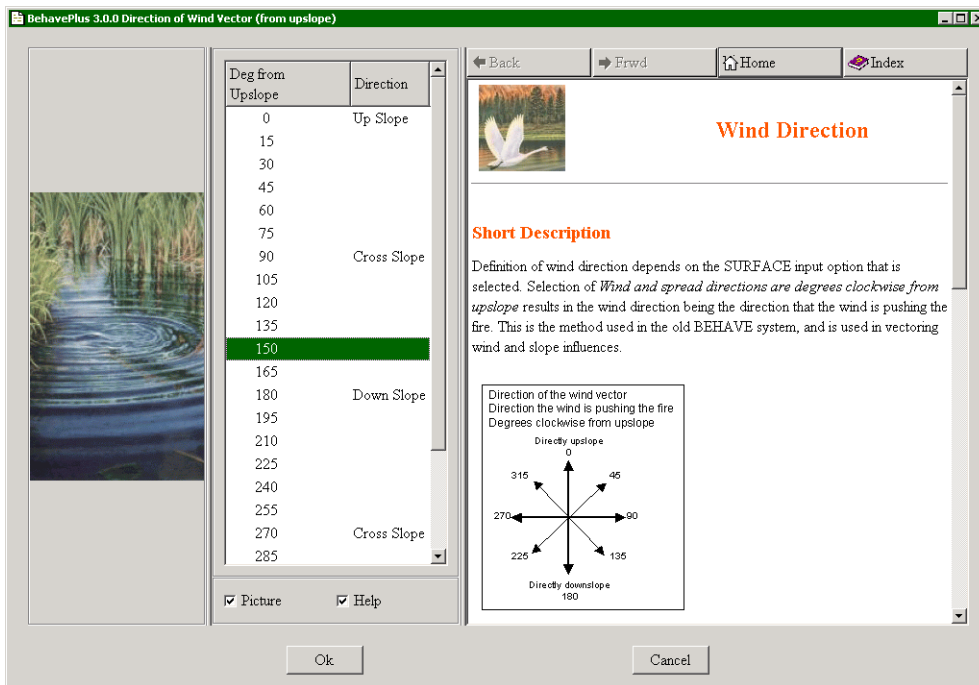

For discrete variables the dialog contains a list of all valid inputs from which the user may select values.

### 21.3. User's Guide

This User's Guide can either be printed or accessed interactively using a PDF viewer such as Adobe Acrobat Reader. It serves as the online help for BehavePlus and can be opened with the Help > Program help command. When viewed with the Adobe Acrobat Reader, the contents at the left provide access to the section in question.



## References

- Anderson, Hal E. 1982. Aids to Determining Fuel Models For Estimating Fire Behavior. Gen. Tech. Rep. INT-122. Ogden, UT: U.S. Department of Agriculture, Forest Service, Intermountain Research Station. 22 p.
- Andrews, Patricia L. 1986. BEHAVE: fire behavior prediction and fuel modeling system-BURN subsystem, Part 1. Gen. Tech. Rep. INT-194. Ogden, UT: U.S. Department of Agriculture, Forest Service, Intermountain Research Station. 130 p.
- Andrews, Patricia L. and Collin D. Bevins. 1999. Update and expansion of the BEHAVE fire behavior prediction system. 3rd International Conference on Forest Fire Research; 14th Conference on Fire and Forest Meteorology. 21-22 November 1998, Luco-Coimbra, Portugal. Vol. 1, pp.733-740.
- Andrews, Patricia L.; Bradshaw, Larry S. 1990. RXWINDOW: Defining windows of acceptable burning conditions based on desired fire behavior. Gen. Tech. Rep. INT-273. Ogden, UT: U.S. Department of Agriculture, Forest Service, Intermountain Research Station. 54 p.
- Andrews, Patricia L.; Chase, Carolyn H. 1989. BEHAVE: fire behavior prediction and fuel modeling system-BURN subsystem, Part 2. Gen. Tech. Rep. INT-260. Ogden, UT: U.S. Department of Agriculture, Forest Service, Intermountain Research Station. 93 p.
- Burgan, Robert E.; Rothermel, Richard C. 1984. BEHAVE: fire behavior prediction and fuel modeling system-FUEL subsystem. Gen. Tech. Rep. INT-167. Ogden, UT: U.S. Department of Agriculture, Forest Service, Intermountain Forest and Range Experiment Station. 126 p.
- Finney, Mark A. 1998. FARSITE: Fire area simulator-model development and evaluation. Res. Pap. RMRS-RP-4. Ogden, UT: U.S. Department of Agriculture, Forest Service, Rocky Mountain Research Station. 47 p.
- Fried, J.S. and B.D. Fried. 1996. Simulating Wildfire Containment with Realistic Tactics. *Forest Science* 42:267-281.
- Rothermel, Richard C. 1972. A mathematical model for predicting fire spread in wildland fuels. Res. Pap. INT-115. Ogden, UT: U.S. Department of Agriculture, Forest Service, Intermountain Forest and Range Experiment Station. 40 p.
- Rothermel, Richard C. 1983. How to Predict the Spread and Intensity of Forest and Range Fires. Gen. Tech. Rep. INT-143. Ogden, UT: U.S. Department of Agriculture, Forest Service, Intermountain Forest and Range Experiment Station. 161 p.
- Rothermel, Richard C. 1991. Predicting behavior and size of crown fires in the northern Rocky Mountains. Res. Pap. INT-438. Ogden, UT: U.S. Department of Agriculture, Forest Service, Intermountain Forest and Range Experiment Station.
- Scott, Joe H.; Burgan, Robert E. (2005). Standard Fire Behavior Fuel Models: A Comprehensive Set for Use with Rothermel's Surface Fire Spread Model. Gen. Tech. Rep. RMRS-GTR-153. Ogden, UT: U.S. Department of Agriculture, Forest Service, Rocky Mountain Research Station. 78 p.
- Van Wagner, C.E. 1977. Conditions for the start and spread of crown fire. *Can. J. For. Res.* 7:23-34.

## Appendix A: Version Comparison

This appendix contains a summary of changes between BEHAVE and the versions of BehavePlus. The different versions were released on the following dates.

Version	Date
BEHAVE	1984
BehavePlus v1.0.0	January, 2002
BehavePlus v2.0.0	July, 2003
BehavePlus v3.0.0	June, 2005

Older versions of the software are available in the ARCHIVES section at [www.fire.org](http://www.fire.org).

### Version 2 and Version 3

Following are significant differences between BehavePlus version 2.0 and version 3.0.

- Van Wagner's (1977) transition to crown fire and Rothermel's (1991) crown fire spread models have been added with the new CROWN module.
- Calculating wind adjustment factors is now a SURFACE module option.
- The expanded set of fuel models (Scott and Burgan, 2005) have been added.
- Support for dynamic fuel models has been added.
- Two new output variables have been added to the SURFACE module to help understand dynamic fuel modeling, Live herb load transfer and Dead herb fuel load.
- Moisture Scenarios used in developing the expanded fuel models have been added.
- Identifying acceptable ranges of fire behavior with table shading is included to replace RxWINDOW from the old BEHAVE system.
- Output tables can be exported into Microsoft Excel and HTML format files.
- The new example Worksheet, BasicStart.bpw, is loaded at startup so the user can quickly do a simple run without having to load a Worksheet or configure one.
- A new example Worksheet, SurfaceCrown.bpw is included.
- Several new example Runs are available, FuelCompare.bpr, FuelMoisWind.bpr, and FuelWind.bpr,
- Module names are listed with the output variables and run options shown on the Worksheet.
- A new option for listing descriptions of discrete variable codes on the Worksheet are added.
- The Fuel/Vegetation input category has been split into two new categories; Fuel/Vegetation, Surface/Understory and Fuel/Vegetation, Overstory.
- A new input category named Acceptable Fire Conditions is displayed on a Worksheet when the Table shading for acceptable fire conditions option is selected.
- P-G has been added to the input variables used specifically for the palmetto-gallberry fuel model.
- The RH Tool has been removed as a module and is now included in the Tool menu. This was done since the RH module did not link to any of the other modules.
- The Probability of Ignition module now draws a smooth curve on the output graphs instead of the steps in previous versions.

## Version 1 and Version 2

Following are significant differences between BehavePlus version 1.0 and version 2.0. Minor changes are not listed here.

- Safety zone size model added as a new SAFETY module
- Containment model added as a new CONTAIN module. This is a new model that allows multiple resources to make direct or parallel attack.
- Probability of ignition by lightning model added to the IGNITE module
- Two fuel weighting, three methods added to the SURFACE module
- Dynamic palmetto-gallberry fuel model added to the SURFACE module
- Size diagram output added to SIZE
- Contain diagram output in CONTAIN
- Direction diagram added to SURFACE
- Fire characteristics chart diagram output added to SURFACE
- Fine dead fuel moisture added as a new tool
- A Run Option section is added to the worksheets for clarification
- The contents of the Notes section on example worksheets is blank. The description of the worksheet that was there for version 1 is not necessary, especially with the addition of the Run Options section.
- The 'Standard' worksheet folder that was supplied with version 1 of the program is called the ExampleWorksheets folder in version 2 to better reflect what it is. The worksheets in that folder are just some that the developers put together. The term 'standard' gave them significance that they didn't deserve.
- The Blank.bpw Worksheet that was in version 1 is called the 0Startup.bpw Worksheet in version 2 to better reflect what it is-the worksheet to use as a startup in selecting calculation modules. The '0' (zero) as a first character of the file name puts it as the first item on the list for easy selection.
- The program now automatically loads the 0Startup.bpw worksheet upon initiation. This saves some steps if the worksheet is set up by module selection. If a previously saved worksheet is desired, it is selected and loaded as before with the File > New command.
- The Fuel model guide button gives you access to the photographs and descriptions in Anderson (1982) "Aids to selecting fuel models" and to the selection key in Rothermel (1983) "How to predict the spread and intensity of forest and range fires"
- The Program Help and the Users Guide for version 1 have been replaced by a single, new document-a users guide in PDF format that can be both printed and accessed online for specific help.
- A Language option has been added. Portuguese is provided as an example.
- Additional Workspace options aid in file management.
- Graph Y-axis are now user-scalable.

## BEHAVE and BehavePlus

The old BEHAVE fire behavior prediction and fuel modeling system is a set of five DOS programs, three of which were first available in 1984. The whole look and feel of the BehavePlus fire modeling system is different, using modern user interface technology

Following are some specific differences that will be of interest to users of the old BEHAVE system.

- BehavePlus is one program. The old BEHAVE was five programs (FIRE1, FIRE2, RXWINDOW, NEWMDL, TSTMDL). The separation was due to computer limitations at the time and an extended development period.
- BehavePlus gives the user control of input options that were fixed on the old BEHAVE. For example, in the old BEHAVE, the DIRECT module required direct input of fuel moisture by size class, midflame wind speed, and direction of wind and spread with respect to upslope. The SITE module calculated fine fuel

moisture and requested input of 20-ft. wind speed, exposure to the wind, and direction of wind and spread. The DISPATCH module requested dead and live fuel moisture, 20-ft. wind speed and wind adjustment factor. Calculations were for upslope spread with the wind. In the TSTMDL program, fuel moisture was specified by category. In contrast, the BehavePlus SURFACE module allows users to specify the method of entry for fuel moisture, wind speed, and directions.

- In BEHAVE only continuous variables could be assigned more than one value for a maximum of seven values. For example, wind speed could be assigned a range of values, but fuel model could not. BehavePlus allows multiple input values for every variable and there is essentially no limit to the number of values. Table output is carried over to multiple pages if necessary.
- BehavePlus produces graphs and diagrams as well as tables. The primary output of the old BEHAVE was tables. Crude graphs were produced using characters.
- The fuel modeling portion of the old BEHAVE consisted of the NEWMDL and TSTMDL programs. The features in NEWMDL are not in BehavePlus. The TSTMDL fuel model testing methods are in BehavePlus.
- BehavePlus does not include the fine dead fuel moisture model in MOISTURE and SITE modules in the FIRE2 program of BEHAVE. A better moisture model based on hourly weather data has been developed and is being incorporated into the National Fire Danger Rating System (NFDRS) and the FireFamily Plus program. Eventually it will be available for fire behavior calculations in BehavePlus. BehavePlus offers the fuel moisture tables as a tool.
- The CONTAIN module of BehavePlus is different from that used in BEHAVE. The old model had a mathematical problem that occasionally surfaced. BehavePlus uses a model by Fried and Fried (1996) that offers the application of multiple resources with various productivity rates and arrival times, and direct or parallel attack at either the fire head or rear. BehavePlus does not offer the option of reverse calculation that was in the old BEHAVE (i.e. given a final fire size, what is the required line production rate).
- The RxWindow program is not and will not be part of BehavePlus. Reverse calculation becomes more difficult (essentially impossible) as models are added. The plan is to provide a new method of table shading to aid in prescribed fire planning.
- The equations in the MORTALITY module in BehavePlus have been updated to match those of FOFEM. Many new tree species have been added.
- BehavePlus lists input values by category (Fuel/Vegetation, Weather, ...) rather than by module (DIRECT, SIZE, ...) as was done in the old BEHAVE.
- In BehavePlus users select the output variables to be displayed. In BEHAVE the output list was fixed.
- Map distance calculation was a stand-alone feature in BEHAVE. It is integrated into BehavePlus.
- BEHAVE asked users whether they were using a computer with a screen. The program could be run in either WORDY or TERSE mode. BehavePlus assumes it is being run on a 21st century personal computer.

## Appendix B: Input and Output Variable Tables

Each input variable in BehavePlus, version 3.0, is listed in the following Table I according to category. 'I' (for Input) in a Module column indicates that it is a possible input for that module. In some cases an input variable may also be an output variable, indicated by 'O' (for Output). It depends on the selected modules, input options, and output variables.

For example, note that

- Midflame wind speed is an input to SURFACE under the input option Wind speed is entered as mid-flame height. However, it is an output variable if Wind speed is entered as 20-ft. wind and wind adjustment factor is selected.
- Rate of spread is an output from SURFACE and an input to SIZE. If both SURFACE and SIZE are selected, the rate of spread from SURFACE is automatically used in SIZE. If only SIZE is selected, then the user must input values for rate of spread.
- Temperature is used only in SCORCH and RH, it is not used for the spread rate and intensity calculations in SURFACE.
- These tables also give the English and metric units and number of decimal places and the output variables selected for display initiated by the 0Startup.bpw worksheet. (See Appendix C.)

**Table 1: Input Variables and Modules**

Input variable	SURFACE	SAFETY	SIZE	CONTAIN	SPOT	SCORCH	MORTALITY	IGNITE	CROWN	Variable Type	English Range/ Units	Metric Range/ Units	Notes
Fuel / Vegetation, Surface/Understory													
Fuel model	I									D	N/A	N/A	
First fuel model	I									D	N/A	N/A	For two fuel models
Second fuel model	I									D	N/A	N/A	"
First fuel model coverage	I									C	0-100%	0-100%	"
Fuel model type	I									D	S or D	S or D	Static or Dynamic
1-h fuel load	I									C	0.0-30.49 ton/ac	0.0-68.35 tonne/ha	Fuel model parameter
10-h fuel load	I									C	0.0-30.49 ton/ac	0.0-68.35 tonne/ha	"
100-h fuel load	I									C	0.0-30.49 ton/ac	0.0-68.35 tonne/ha	"
Live herbaceous fuel load	I									C	0.0-30.49 ton/ac	0.0-68.35 tonne/ha	"
Live woody fuel load	I									C	0.0-30.49 ton/ac	0.0-68.35 tonne/ha	"
1-h surface area / vol ratio	I									C	109-4,000 ft2/ft3	358-13,123 m2/m3	"
Live herb surface area / vol ratio	I									C	109-4,000 ft2/ft3	358-13,123 m2/m3	"
Live woody surface area / vol ratio	I									C	109-4,000 ft2/ft3	358-13,123 m2/m3	"
Fuel bed depth	I/O									C	0.05 to 10.0 ft	0.02-3.05 m	"output for P-G
Dead fuel moisture of extinction	I									C	5 - 100%	5 - 100%	Fuel model parameter
Dead fuel heat content	I									C	6,000-12,000 BTU/lb	13,967-27,934kJ/kg	"
Live fuel heat content	I									C	6,000-12,000 BTU/lb	13,967-27,934kJ/kg	"
P-G age of rough	I									C	1-25 years	1-25 years	For palmetto-gallberry surface fuel option

**Table 1: Input Variables and Modules**

Input variable	SURFACE	SAFETY	SIZE	CONTAIN	SPOT	SCORCH	MORTALITY	IGNITE	CROWN	Variable Type	English Range/ Units	Metric Range/ Units	Notes
P-G height of under-story	I									C	1-6 ft	0 -2 m	"
P-G palmetto coverage	I									C	15-85 %	15-85 %	"
P-G overstory basal area	I									C	30-110 ft <sup>2</sup> /ac	6.8-25.3 m <sup>2</sup> /ha	"
Lightning ignition fuel type								I		D	PPL, PWC, PWD, PWS, LPD, DFD, ESH, PMC	PPL, PWC, PWD, PWS, LPD, DFD, ESH, PMC	
Lightning duff and litter depth								I		C	0-12 in	0-30 cm	
<b>Fuel / Vegetation, Overstory</b>													
Canopy cover	I									C	0-100%	0-100%	
Canopy height	I				I					C	0-300 ft	0-91 m	
Tree height					I	I				C	10-300 ft	3-91 m	
Crown ratio	I						I			C	0.1 - 1.0	0.1 - 1.0	
Canopy base height									I	C	0.1-100 ft	0-30.5 m	
Canopy bulk density									I	C	0.001-0.062 lb/ft <sup>3</sup>	0.010-1.001 kg/m <sup>3</sup>	
Mortality tree species					I	I				D	(206 species)	(206 species)	
Spot tree species					I					D	(14 species)	(14 species)	
D.B.H.					I	I				C	5 - 40 in	13 - 102 cm	
Bark thickness							I/O			C	0.1 - 2.0 in	0.3 - 5.1 cm	
<b>Fuel Moisture</b>													
Moisture scenario	I							I		D	N/A	N/A	
1-h moisture	I							I	I	C	1 - 60%	1 - 60%	Fuel moisture scenario parameter
10-h moisture	I								I	C	1 - 60%	1 - 60%	"
100-h moisture	I								I	C	1 - 60%	1 - 60%	"
Live herbaceous moisture	I									C	30 - 300%	30 - 300%	" Live foliage for P-G

**Table 1: Input Variables and Modules**

Input variable	SURFACE	SAFETY	SIZE	CONTAIN	SPOT	SCORCH	MORTALITY	IGNITE	CROWN	Variable Type	English Range/ Units	Metric Range/ Units	Notes
Live woody moisture	I								I	C	30 - 300%	30 - 300%	" Live stemwood for P-G
Dead fuel moisture	I									C	1 - 60%	1 - 60%	Used for 1-h, 10-h, 100-h
Live fuel moisture	I									C	30 - 300%	30 - 300%	Used for live herbaceous and woody
Foliar moisture									I	C	30 - 300%	30 - 300%	Overstory conifer needles
<b>Weather</b>													
Midflame wind speed	I/O				I					C	0 - 60 mi/h	0.0 - 96.6 km/h	
20-ft (or 10-m) wind speed	I			I					I	C	0 - 99 mi/h	0.0 - 159 km/h	
Wind adjustment factor	I/O									C	0.1 - 1.0	0.1 - 1.0	
Effective wind speed	0		I							C	0 - 60 mi/h	0.0 - 96.6 km/h	
Wind direction (from North) or (from upslope)	I									C	0 - 360 deg	0 - 360 deg	Reference depends on input option selections
Air temperature					I	I	I			C	-40 - 120 deg F	-40 - 49 deg C	
Fuel shading from the sun							I			C	0 - 100%	0 - 100%	by cloud or canopy
Lightning strike type							I			D	+, -, or unknown	+, -, or unknown	
<b>Terrain</b>													
Slope steepness	I									C	0 - 45 deg 0 - 100%	0 - 45 deg 0 - 100%	
Aspect	I									C	0 - 360 deg	0 - 360 deg	
Ridge-to-valley elevation difference				I						C	0 - 4,000 ft	0 - 1,219 m	
Ridge-to-valley horizontal distance				I						C	0 - 4.0 mi	0 - 6.4 km	
Spotting source location				I						D	RT, MW, VB, ML	RT, MW, VB, ML	



**Table 1: Input Variables and Modules**

Input variable	SURFACE	SAFETY	SIZE	CONTAIN	SPOT	SCORCH	MORTALITY	IGNITE	CROWN	Variable Type	English Range/ Units	Metric Range/ Units	Notes
<b>Fire</b>													
Rate of spread (maximum)	0		I	I						C	0 - 500 ch/h	0.0-167.6 m/min	Head fire
Flame length	0	I			I	I			I	C	0 - 200 ft	0 - 61 m	Worst-case estimate of flame height for SAFETY. Can be used to calculate FLI for CROWN
Fireline intensity	0					I			I	C	0 - 10,000 BTU/ft/s	0 - 34,641 kW/m	
Flame height from a burning pile					I					C	0 - 100 ft	0 - 30.5 m	
Spread direction (from North) or (from upslope)	I/O									C	0 - 360 deg	0 - 360 deg	Reference depends on input option selections
Number of torching trees					I					C	0 - 30	0 - 30	
Scorch height						0	I			C	0 - 200 ft	0 - 61 m	
Elapsed time	I		I						I	C	0.5 - 8.0 h	0.5 - 8.0 h	From ignition/start for SIZE link to CONTAIN
Fire size at report			0	I						C	0.1-100 ac	0.0-40.5 ha	'area' from SIZE
Length-to-width ratio			0	I						C	1-7	1-7	
<b>Map</b>													
Map representative fraction (1:x)	I		I		I					C	1,980 - 1,013,760	1,980 - 1,013,760	
Contour interval	I									C	1 - 1000 ft	0.3 - 304.8 m	
Map distance	I									C	0.1 - 100 in	0.3 - 254 cm	
Number of contour intervals	I									C	1 - 100	1 - 100	
<b>Suppression</b>													
Suppression tactic				I						D	Head or Rear	Head or Rear	
Line construction offset				I						C	0-100 ch	0-2012 m	0 = direct attack, else parallel attack

**Table 1: Input Variables and Modules**

Input variable	SURFACE	SAFETY	SIZE	CONTAIN	SPOT	SCORCH	MORTALITY	IGNITE	CROWN	Variable Type	English Range/ Units	Metric Range/ Units	Notes
Resource name				I						D	N/A	N/A	If multiple resources, entry for each resource
Resource line production rate				I						C	1-200 ch/h	20.1-4023.4 m/h	"
Resource arrival time				I						C	0-8 h	0-8 h	"
Resource duration				I						C	0.0-10 h	0.0-10 h	"
Resource base cost				I						C	0-500,000	0-500,000	"
Resource hourly cost				I						C	0-500,000	0-500,000	"
Number of personnel		I								C	1-200	1-200	Integer
Area per person		I								C	10-100 ft <sup>2</sup>	9.3-9.3 m <sup>2</sup>	
Number of heavy equipment		I								C	0-10	0-10	Integer
Area per heavy equipment		I								C	100-500 ft <sup>2</sup>	9.3-46.5 m <sup>2</sup>	

I = Input

O = Output

I/O = Input or Output depending on the selected modules and options

C = Continuous variable

D = Discrete variable

**Table 2: Output Variables and Modules**

Output variable	Default output variable	Table shading variable	Available as a map distance	English Units	Metric Units	Notes
<b>SURFACE</b>						
Surface rate of spread	X	X		ch/h	m/min	
Heat per unit area	X	X		BTU/ft <sup>2</sup>	KJ/m <sup>2</sup>	
Fireline intensity	X	X		BTU/ft/s	KW/m	
Flame length	X	X		ft	m	
Reaction intensity				BTU/ft <sup>2</sup> /min	KW/m <sup>2</sup>	
Direction of maximum spread	X			degrees	degrees	
Surface spread distance			X	ch	m	
Midflame wind speed				mi/h	km/h	
Wind adjustment factor				fraction	fraction	
Effective wind speed				mi/h	km/h	
Effective wind speed limit				mi/h	km/h	
Maximum wind exceeded?	X			Yes or No	Yes or No	
Fuel load transfer				percent	percent	
Dead herbaceous fuel load				ton/ac	tonne/ha	
Slope steepness				percent	percent	
Slope elevation change				ft	m	
Slope horizontal distance				ft	m	
Wind/slope/fire direction diagram				N/A	N/A	
Fire characteristics chart				N/A	N/A	
P-G dead fine fuel load				ton/ac	tonne/ha	
P-G dead medium fuel load				ton/ac	tonne/ha	
P-G dead foliage fuel load				ton/ac	tonne/ha	
P-G live fine fuel load				ton/ac	tonne/ha	
P-G live medium fuel load				ton/ac	tonne/ha	
P-G live foliage fuel load				ton/ac	tonne/ha	
P-G litter fuel load				ton/ac	tonne/ha	
Fuel bed depth				ft	m	

**Table 2: Output Variables and Modules**

Output variable	Default output variable	Table shading variable	Available as a map distance	English Units	Metric Units	Notes
<b>CROWN</b>						
Critical surface intensity	X			Btu/ft/sec	kW/m	
Critical surface flame length				ft	m	
Transition ratio	X			ratio	ratio	
Transition to crown fire	X	X		Yes / No	Yes / No	
Crown ROS	X	X		ch/h	m/min	
Critical crown ROS	X			ch/h	m/min	
Active ratio	X			ratio	ratio	
Active crown	X	X		Yes / No	Yes / No	
Fire type	X	X		Surface Torching Crowning	Surface Torching Crowning	
Crown spread distance			X	ch	m	
<b>SAFETY</b>						
Safety zone separation distance	X	X		ft	m	
Safety zone size	X	X		ac	ha	
Safety zone radius		X		ft	m	
<b>SIZE</b>						
Area	X	X		ac	ha	
Perimeter	X			ch	m	
Length-to-width ratio				N/A	N/A	
Forward spread distance			X	ch	m	
Backing spread distance			X	ch	m	
Fire length			X	ch	m	
Maximum fire width			X	ch	m	
Fire shape diagram				N/A	N/A	
<b>CONTAIN</b>						
Time from report	X	X		h	h	To containment or escape


**Table 2: Output Variables and Modules**

Output variable	Default output variable	Table shading variable	Available as a map distance	English Units	Metric Units	Notes
Contain status	X	X		Contained, Withdrawn, or Exhausted	Contained, Withdrawn, or Exhausted	
Contained area	X	X		ac	ha	At containment. If escape or withdrawn; area = 0
Fireline constructed	X			ch	m	
Number of resources used				Integer	Integer	
Cost of resources used				N/A	N/A	
Containment diagram				N/A	N/A	
<b>SPOT</b>						
Spotting distance from torching trees	X	X	X	mi	km	
Spotting distance from a burning pile		X	X	mi	km	
Spotting distance from a wind-driven surface fire		X	X	mi	km	
<b>SCORCH</b>						
Scorch height	X	X		ft	m	
<b>MORTALITY</b>						
Bark thickness				in	cm	
Tree crown length scorched				ft	m	
Tree crown volume scorched		X		percent	percent	
Probability of mortality	X	X		percent	percent	
<b>IGNITE</b>						
Probability of ignition from a fire-brand	X	X		percent	percent	
Probability of ignition from lightning				percent	percent	

## Appendix C: The 0Startup.bpw worksheet, defaults

The 0Startup.bpw example Worksheet is provided as a “clean slate” starting place for selection of calculation modules. The 0Startup.bpw worksheet doesn't look like much on the screen, but it carries with it all of the 'default' selections for calculation modules and displays. Any of those selections can be changed, of course. The 0Startup.bpw worksheet can be reloaded at any time to reset the defaults. The 0 (zero) is the first character in the file name to assure that it is listed first in the list of Example Worksheets for easy selection.

If you want to use a different set of 'defaults', simply develop and save a similar startup worksheet in your own folder. For example, if you generally use metric units or if you prefer to display graphs as full screen rather than 50%, then you can create your own “clean” worksheet. You will need to load it using the File > New command.

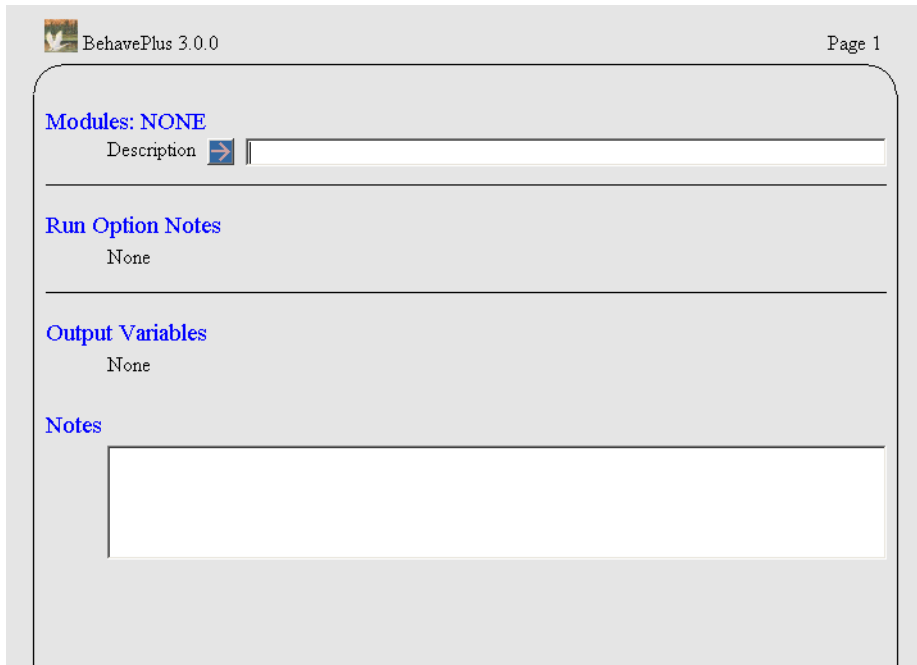

Following are the 'default' selections that come with the 0Startup.bpw worksheet.

**Table 1: Input Options**

Module	Input option	0startup.bpw selection	Other options
SURFACE	Fuel is entered as	fuel models.	<ul style="list-style-type: none"> <li>• fuel parameters.</li> <li>• palmetto-gallberry.</li> <li>• two fuel models, two-dimensional expected spread.</li> <li>• two fuel models, harmonic mean.</li> <li>• two fuel models, area weighted.</li> </ul>
	Moisture is entered by	individual size class.	<ul style="list-style-type: none"> <li>• dead and live category.</li> <li>• moisture scenario.</li> </ul>
	Wind speed is entered as	midflame height.	<ul style="list-style-type: none"> <li>• 20-ft wind and Input wind adjustment factor.</li> <li>• 20-ft wind and Calculated wind adjustment factor.</li> <li>• 10-m wind and Input wind adjustment factor.</li> <li>• 10-m wind and Calculated wind adjustment factor.</li> </ul>
	Wind direction is	specified on the worksheet.	upslope.
	Rate of spread is calculated	only in the direction of maximum spread.	in directions specified on the worksheet.
	Wind & spread directions are	degrees clockwise from upslope (direction the wind is pushing the fire).	degrees clockwise from north (direction from which the wind is blowing).
	Slope is specified as	percent.	degrees.
	Slope steepness is	specified on the worksheet.	calculated from map measurements.
CROWN	Surface fire intensity is entered as	flame length.	fireline intensity.
CONTAIN	Suppression input entered for	a single resource.	multiple resources.
SCORCH	Fire intensity is entered as	flame length.	fireline intensity.
MORTALITY	Bark thickness is	specified on the worksheet.	estimated from species and d.b.h.

**Table 2: Outputs**

Module	0Startup.bpw output variable selection	Other output variables
SURFACE	<ul style="list-style-type: none"> <li>• Surface rate of spread</li> <li>• Heat per unit area</li> <li>• Fireline intensity</li> <li>• Flame length</li> <li>• Direction of maximum spread</li> <li>• Maximum wind exceeded?</li> </ul>	<ul style="list-style-type: none"> <li>• Reaction Intensity</li> <li>• Surface Spread Distance</li> <li>• Midflame Wind Speed</li> <li>• Wind Adjustment Factor</li> <li>• Effective Wind Speed</li> <li>• Effective Wind Speed Limit</li> <li>• Fuel Load Transfer</li> <li>• Dead Herbaceous Fuel Load</li> <li>• Slope Steepness</li> <li>• Slope Elevation Change</li> <li>• Slope Horizontal Distance</li> <li>• Wind/Slope/Spread Direction Diagram</li> <li>• Fire Characteristics Chart</li> </ul> <p>For palmetto-gallberry fuel option:</p> <ul style="list-style-type: none"> <li>• P-G Dead Fine Fuel Load</li> <li>• P-G Dead Medium Fuel Load</li> <li>• P-G Dead Foliage Fuel Load</li> <li>• P-G Live Fine Fuel Load</li> <li>• P-G Live Medium Fuel Load</li> <li>• P-G Live Foliage Fuel Load</li> <li>• P-G Litter Fuel Load</li> <li>• Fuel Bed Depth</li> </ul>
CROWN	<ul style="list-style-type: none"> <li>• Critical Surface Intensity</li> <li>• Transition Ratio</li> <li>• Transition to Crown Fire ?</li> <li>• Crown ROS</li> <li>• Critical Crown ROS</li> <li>• Active Ratio</li> <li>• Active Crown ?</li> <li>• Fire Type</li> </ul>	<ul style="list-style-type: none"> <li>• Critical Surface Flame Length</li> <li>• Crown Spread Distance</li> </ul>
SAFETY	<ul style="list-style-type: none"> <li>• Safety Zone Separation Distance</li> <li>• Safety Zone Size</li> </ul>	<ul style="list-style-type: none"> <li>• Safety Zone Radius</li> </ul>
SIZE	<ul style="list-style-type: none"> <li>• Area</li> <li>• Perimeter</li> </ul>	<ul style="list-style-type: none"> <li>• Length-to-Width Ratio</li> <li>• Forward Spread Distance</li> <li>• Backing Spread Distance</li> <li>• Fire Length</li> <li>• Maximum Fire Width</li> <li>• Fire Shape Diagram</li> </ul>



**Table 2: Outputs**

Module	0Startup.bpw output variable selection	Other output variables
CONTAIN	<ul style="list-style-type: none"> <li>• Time from Report</li> <li>• Contain Status</li> <li>• Contained Area</li> <li>• Fireline Constructed</li> </ul>	<ul style="list-style-type: none"> <li>• Number of Resources Used</li> <li>• Cost of Resources Used</li> <li>• Containmen Diagram</li> </ul>
SPOT	<ul style="list-style-type: none"> <li>• Spotting Distance from Torching Trees</li> </ul>	<ul style="list-style-type: none"> <li>• Spotting Distance from a Burning Pile</li> <li>• Spotting Distance from a Wind Driven Surface Fire</li> </ul>
SCORCH	<ul style="list-style-type: none"> <li>• Scorch Height</li> </ul>	
MORTALITY	<ul style="list-style-type: none"> <li>• Probability of Mortality</li> </ul>	<ul style="list-style-type: none"> <li>• Bark Thickness</li> <li>• Tree Crown Length Scorched</li> <li>• Tree Crown Volume Scorched</li> </ul>
IGNITE	<ul style="list-style-type: none"> <li>• Probability of Ignition from a Firebrand</li> </ul>	<ul style="list-style-type: none"> <li>• Probability of Ignition from Lightning</li> </ul>

**Table 3: Menu Items**

Menu item	0Startup.bpw selection	Other options
View	100%	50, 67, 75, 83, 117, 133, 150, 167, 200%
Configure > Module selection	None	SURFACE, SAFETY, SIZE, CONTAIN, SPOT, SCORCH, MORTALITY, IGNITE, RH
	Display output distances in map units check box cleared	Display output distances in map units check box selected
	Table shading for acceptable fire conditions check box cleared.	Table shading for acceptable fire conditions check box selected
Configure > Units	English	Metric Custom
Configure > Language	English (US)	Portuguese (Portugal)
Configure > Fuel model set selection	None	No other options. Fuel model set selection must be done every time a Worksheet or Run is loaded
Configure > Moisture scenario set selection	None	No other options. Moisture scenario set selection must be done every time a Worksheet or Run is loaded


**Table 4: Appearance**


Configure > Appearance Tab	Option	0Startup.bpw selection	Other options
Application	Show help pane	Selected	Cleared
	Show picture pane	Selected	Cleared
	Border Color	Black	Other colors
	Border Width	1	0 = no border 2-9= thicker border
Graph size	Graph Size (%)	50%	25-100%
	Graph Title	Short	Long
	X Axis Origin	Zero	Min value
	Y Axis Origin	Zero	Min value
Graph elements	Background	White	Other colors
	Rainbow Colors	3	4-18
	Bar Color	Red	Other colors
	Curve Points	20	4-100
	Curve Color	Rainbow colors	Single color
	Curve Width	3	0-9
	Axis Color	Black	Other colors
	Axis Width	1	2-9
	Gridline Color	Yellow	Other colors
Gridline Width	1	0=no gridlines 2-9=thicker gridlines	
Page tabs	Display the page tab	Cleared	Selected
	Tabs per Page	4	0 = no tabs 1-10
	Tab Position	1	0=no tabs 1- #tabs per page
	Tab Text	Blank	User defined
	Tab Text Color	Black	Other color
	Tab Font Size	12	8-24
Tables	Shade alternate table rows	Selected	Cleared
	Shade	Light Grey	Other colors

**Table 4: Appearance**

Configure > Appearance Tab	Option	0Startup.bpw selection	Other options
Worksheet	Fire projection documentation	Cleared	Selected
	Training documentation	Cleared	Selected
	Show input codes for all discrete variables	Cleared	Selected
	Show descriptions only for entered discrete variable codes	Selected	
	Show output variables to be calculated	Selected	Cleared
	Show notes section	Selected	Cleared
	Notes lines	4	1-10

## Appendix D: Example Worksheets

BehavePlus allows the user to define and save a worksheet for later use. A set of Example Worksheets is provided with the program. Those worksheets are described in this appendix. A worksheet is selected through File > New. Clicking on the  by the Example Worksheets folder displays the following list. A double click on the Worksheet or selecting and clicking the OK button loads the Worksheet.

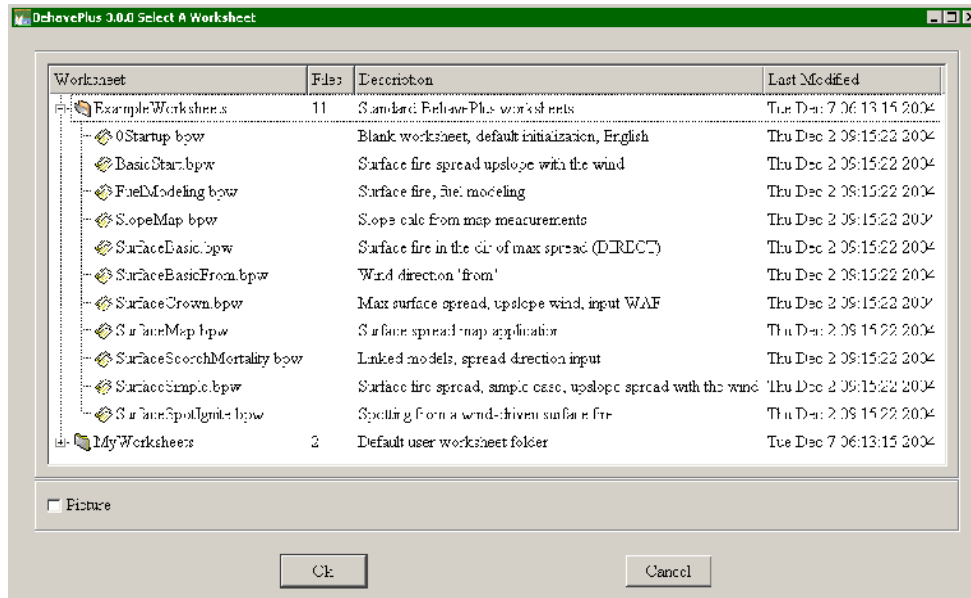

It is important to recognize that these are only examples. We expect that users will set up their own folder of commonly used worksheets.

### 0Startup.bpw

This worksheet is a special case. It is used as the starting place for selecting calculation modules. It shows no input or output variables, but it sets defaults for all run settings as described in Appendix D. The 0Startup.bpw worksheet was used to initialize all of the following example worksheets.

### BasicStart.bpw

This is the Worksheet that appears when you start BehavePlus. It is designed so the user can quickly do a simple run without having to load a Worksheet or configure one.

- Calculations are for maximum spread rate, upslope spread with the wind.
- Fuel moisture is entered by individual size class.

### FuelModeling.bpw

This is the SURFACE module set up to examine the effect of changing fuel parameters, part of the process of developing a custom fuel model.

- Fuel is entered as fuel parameter.
- Fuel moisture is entered as moisture scenario.
- Wind is blowing upslope.
- Calculations are only for the direction of maximum spread.
- Only rate of spread (maximum) and flame length are selected as output.

## SlopeMap.bpw

This simple worksheet is used to calculate slope steepness from map measurements. It is available from the SURFACE module.

- Slope steepness is specified to be calculated from map measurements.
- Only the slope output variables are selected.

## SurfaceBasic.bpw

This worksheet is similar to the DIRECT module in the old BEHAVE. This method of specifying directions is used to show the relative effects of wind and slope by vectoring. Reference is to upslope, so there is no need to define aspect or reference directions with respect to north.

- A fuel moisture value is required for each size class.
- Calculations are only for the direction of maximum spread
- Wind and spread directions are specified as degrees clockwise from upslope
- Wind direction is specified as the direction the wind is pushing the fire

## SurfaceBasicFrom.bpw

This worksheet is like SurfaceBasic.bpw except the other option for specifying directions is selected. This method of specifying directions is suited for onsite calculations for a specific location on the landscape. The wind direction is that used in weather forecasts.

- A fuel moisture value is required for each size class.
- Calculations are only for the direction of maximum spread.
- Wind and spread directions are specified as degrees clockwise from north.
- Wind direction is the direction from which the wind is blowing.

## SurfaceCrown.bpw

This Worksheet links the SURFACE and CROWN modules.

- A fuel moisture value is required for each size class.
- Canopy Base Height, Canopy Bulk Density, and Foliar Moisture are the inputs required for the CROWN module.
- Wind is blowing upslope.
- Wind is entered as 20-ft wind speed and wind adjustment factor (rather than as midflame wind speed).
- Calculations are only for the direction of maximum spread.

## SurfaceMap.bpw

This worksheet might be used when using maps in projecting fire growth.

- The header includes those for 'fire projection documentation'.
- Output distances are displayed as map units.
- Calculations are only for the direction of maximum spread.
- Wind and spread directions are degrees clockwise from north.
- Wind direction is the direction from which the wind is blowing.
- Direction of maximum spread and spread distance are selected as additional output variables.
- Slope steepness is calculated from map measurements.

### **SurfaceScorchMortality.bpw**

This worksheet enables the three modules SURFACE, SCORCH, and MORTALITY.

- Calculations are for specified spread directions (rather than for the direction of maximum spread).
- Wind and spread directions are degrees clockwise from upslope.
- Wind direction is the direction the wind is pushing the fire.

### **SurfaceSimple.bpw**

This worksheet is the ultimate simplification of the setup for a surface fire spread and intensity calculation. It can be used to examine relationships among the basic variables (fuel, moisture, wind, and slope) on surface fire spread. For specific fire behavior prediction, more information would be used.

- Fuel moisture is entered as dead and live category. A single value is used for 1-h, 10-h, and 100-h moisture content and another for live herbaceous and live woody fuel moisture.
- Calculations are for maximum spread rate, upslope spread with the wind.

### **SurfaceSpotIgnite.bpw**

This worksheet enables the three modules; SURFACE, SPOT, and IGNITE

- Spotting distance is calculated from a wind-driven surface fire, which is the only spotting distance output option that makes sense for a link to SURFACE.
- Wind is entered as 20-ft wind speed and wind adjustment factor (rather than as midflame wind speed).
- Wind direction is upslope.
- Calculations are only for the direction of maximum spread (the only option that is valid for this spotting option).

# Index

## Numerics

- 1 hr fuel moisture 95
- 123 spreadsheet format 71

## A

- acceptable fire conditions 38
  - Worksheet section 19
- attaching
  - custom fuel models 79
  - moisture scenarios 83
- axis origins 45
- axis scales 44

## B

- BasicStart.bpw 15
- bmp 71
- borders
  - Worksheet 20
- bpf 81
- browser, using a 72
- Button
  - Choices 28, 87
  - Convert 92
  - Export 95
  - first page 69
  - Guide 15, 27
  - Initialize from a Fuel Model 78
  - last page 69
  - next page 69
  - Options 23
  - previous page 69

## C

- Calculate Results dialog box 31, 32, 41, 42, 43, 44, 47
- capture 71
- cascade display 70
- changing a Worksheet 22
- check box
  - Contain Status 67
  - Display Graph Results 41
  - Display output distances in map units 89
  - Display table results 31
  - Fire Characteristics Chart 61
  - Fire projection documentation 17
  - Fire Shape Diagram 64
  - Shade alternate table rows 34
  - Show description for all discrete variable codes 18, 19
  - Show descriptions only for entered discrete variable codes 18
  - Slope Elevation Change 88

- Slope Horizontal Distance 88
- Slope Steepness 88
- Table shading for acceptable fire conditions 19, 37
- Training documentation 17
- Wind/Slope/Spread Direction Diagram 57

- Choices button 28
- civil dawn 99
- civil dusk 99
- clone Workspace 101
- colors
  - graph 53
- Contain Status check box 67
- containment shape diagram 67
- continuous variable 13
  - entering 27
- contour interval 89
- Convert button 92
- create
  - custom fuel models 77
  - moisture scenario 85
  - Workspace 101
- curve points 55
- custom fuel models 77
  - attaching 79
  - creating 77
  - FARSITE format 81
  - saving 77
  - set selection 79

## D

- dead herbaceous fuel load 76
- decimal places 91
- DefaultDataFolder 101
- define
  - custom fuel models 77
  - moisture scenario 85
- delete
  - files and folders 104
- dew point temperature 97
- diagram 57
  - containment shape 67
  - fire characteristics chart 61
  - fire shape 64
  - image 71
  - Wind/slope/spread direction 57
- dialog box
  - Appearance Options 20
  - Calculate Results - see Calculate Results dialog box
  - Error 73
  - Fine Dead Fuel Moisture Tool 95

- Fuel Model 79
- Fuel Model Export Selection 82
- Graph Limits 48
- Input Guide 13, 27
- Module Selection 23, 37
- Moisture Scenario 83, 84
- Mortality Module Options 23
- Relative Humidity Tool 97
- Save as 103
- Select a Run 102
- Select A Units Set 91
- Select a Worksheet 21, 77, 102
- Sun-Moon Calendar 99
- Surface Module Options 88
- Units Conversion Tool 92
- Units Editor 91, 92
- Directions tab 57
- discrete variable 13
  - codes 18
  - entering 28
- Display Graph Results check box 41
- Display output distances in map units check box 89
- Display table results check box 31
- documentation section 16
- dynamic fuel models 76
- E**
- entering input variables 27
- error checking 73
- example Worksheet
  - 0Startup.bpw 22
  - BasicStart.bpw 15
  - FuelModeling.bpw 77
  - SlopeMap.bpw 89
  - SurfaceBasicFrom.bpw 16
- Excel 71
- expanded fuel models 76
- export
  - custom fuel models 81
  - fine dead fuel moisture 95
  - HTML file 72, 95
  - spreadsheet 71
  - table output 71
  - text file 71
- Export button 95
- F**
- FARSITE 1, 81, 82
- file
  - Custom Fuel Model 81
  - HTML 72
  - image 71
  - spreadsheet 71
  - tab delimited text 71
- file extensions 12, 102
  - 123 71
  - bmp 71
  - bpf 81
  - fmd 81
  - html 72
  - jpg 71
  - png 71
- file management 101
- file structure 12, 101
- Fine Dead Fuel Moisture Tool dialog box 95
- fire characteristics chart 61
- Fire Characteristics Chart check box 61
- Fire projection documentation check box 17
- fire shape diagram 64
- Fire Shape Diagram check box 64
- first page toolbar button 69
- FlamMap 1, 81, 82
- fmd 81
- folder
  - description 104
  - new 104
- folders
  - delete 104
- Fuel Model
  - dialog box 79
  - Input Guide 76, 79
- Fuel Model Export Selection dialog box 82
- fuel models 75
  - attaching custom sets 79
  - create custom 77
  - custom 77
  - definition 13
  - dynamic 76
  - expanded set 76
  - FARSITE format 81
  - palmetto-gallberry 75
  - parameters 77
  - Save as 103
  - save custom 77
  - set selection 79
  - standard 13 75
  - type 76
- fuel parameters 77
- FuelModeling.bpw 77
- G**
- Graph Elements tab 49
- Graph Size tab 49
- graphs 41
  - appearance 49
  - axis scales 44
  - colors 53
  - curve points 55



- image 71
  - limits 48
  - line widths 54
  - title 51
  - two variable 42
  - X-axis 44
  - Y-axis 46
- Guide button 15, 27
  - definition 13
- H**
- HTML file 72, 95
- I**
- image 71
- Initialize from a Fuel Model button 78
- input codes 18
- Input Guide dialog box 13, 27
  - Fuel Model 76, 79
  - Map Representative Fraction 87
  - Moisture Scenario 84
- input section 17
- input variables
  - entering 27
  - linked 29
  - multiple values 27, 28
  - ranges 27
- installation
  - Windows 12
- invalid input 73
- J**
- jpg 71
- L**
- language 93
- last page toolbar button 69
- line widths
  - graphs 54
- Linked input variables 29
- live herb load transfer 76
- live herbaceous moisture 76
- loading
  - custom fuel models 79
  - fuel models 75
  - moisture scenarios 83
  - Run 102
  - Worksheet 21, 102
- M**
- map
  - applications 87
  - distances 89
  - representative fraction 87, 89
  - scale 87
- Map Representative Fraction dialog box 87
- Model
  - definition 13
- Module Selection dialog box 23, 37
- Modules 23
  - definition 13
  - input options 23
  - linking 23
  - output options 24
- moisture scenario 83
  - attaching sets 83
  - define 85
  - save 86
  - Save as 103
  - using 83
  - viewing 84
- moon-rise 99
- moon-set 99
- Mortality Module Options dialog box 23
- N**
- new
  - folder 104
  - Workspace 101
- next page toolbar button 69
- NEXUS 1, 81
- notes section 20
- number of curve points 55
- O**
- Operation 7
- Options button 23
- output variables
  - tab 57, 61
- output variables section 19
- outputs
  - diagram - see diagram
  - graphs - see graphs
  - image 71
  - map distances 89
  - table shading 37
  - tables 31, 32, 39
  - two way tables 32
  - variables 24, 38
- P**
- page buttons 69
- page header section 16
- page tabs 20
- palmetto-gallberry 75
- png 71
- Portuguese version 93
- prescription window 37
- previous page toolbar button 69
- print 70

**R**

range of acceptable fire conditions 38  
Relative Humidity Tool dialog box 97

**Run**

definition 13  
delete 104  
load 102  
Save as 102

run option notes section 19

RXWINDOW 37

**S**

Save as 102

custom fuel model 78, 103  
dialog box 103  
HTML file 72, 95  
image 71  
images 103  
moisture scenario 86, 103  
results 103  
Run 22, 102  
spreadsheet 71  
tab delimited file 71  
Worksheet 22, 103

screen capture 71

sections - see Worksheet sections

Select a Run dialog box 102

Select A Units Set dialog box 91

Select a Worksheet dialog box 102

set selection

fuel models 75  
moisture scenarios 83  
units 91

Shade alternate table rows check box 34

Show description for all discrete variable codes check box 18, 19

Show descriptions only for entered discrete variable codes check box 18

size, window 69

slope

from map measurements 87

Slope Elevation Change check box 88

Slope Horizontal Distance check box 88

Slope Steepness check box 88

SlopeMap.bpw 89

spreadsheet 71

standard fuel models 75

Startup Worksheet 22

steepness

from map measurements 87

sub-models

list 7, 10

Sun-Moon Calendar Tool 99

sun-rise 99

sun-set 99

SurfaceBasicFrom.bpw 16

system requirements 12

**T**

tab delimited text file 71

table shading

for acceptable fire conditions 37  
for readability 34

Table shading for acceptable fire conditions check box 19, 37

Tables

appearance 34  
multiple pages 34  
output 31, 32  
row shading 34  
saving 71, 103

tabs

Directions 57  
Graph Size - see Graph Size tab  
Graph Elements 49  
Graph Size 49  
Output variables 57, 61  
Outputs 88  
page 20

tiled display 70

time

civil dawn 99  
civil dusk 99  
moon-rise 99  
moon-set 99  
sun-rise 99  
sun-set 99

title

graphs 51

toolbar button 14

first page 69  
last page 69  
next page 69  
previous page 69

tools

Fine Dead Fuel Moisture 95  
Relative Humidity 97  
Sun-Moon Calendar 99  
Units conversion 92

Training documentation check box 17

two variable graph 42

two way tables 32

**U**

units 91

custom set 91  
decimal places 91  
English 91

- metric 91
- Units Conversion Tool dialog box 92
- Units Editor dialog box 91, 92
- V**
- variables
  - input-see input variables
  - output-see output variables
- view size 69
- viewing
  - fuel model parameters 79
  - moisture scenario 84
- W**
- web browser 72
- wet bulb depression 97
- wet bulb temperature 97
- Wind/Slope/Spread Direction Diagram check box 57
- Window 69
  - cascade 70
  - size 69
  - tiled 70
- Windows installation 12
- Worksheet 15–22
  - borders 20
  - definition 13
  - delete 104
  - editing 22
  - example - see example Worksheets
  - extension 12
  - layout 15
  - load 21, 102
  - Map section 88
  - Save as 103
  - saving 22
  - size 69
  - startup 22
- Worksheet sections 16
  - acceptable fire conditions 19
  - documentation 16
  - input 17
  - notes 20
  - output variables 19
  - page header 16
  - run option notes 19
- Workspace 101
  - clone 101
  - definition 13
  - new 101
- X**
- X-axis 44
- X-axis origin 45
- Y**
- Y-axis 46
- Y-axis origin 45

# Command Index

## C

### Configure

#### Appearance

- Application 9
- Application tab 20
- Graph Elements tab 41, 49, 53
- Graph Elements tab > Curve Points 55
- Graph Elements tab > Line width 54
- Graph Size tab 45, 49
- Graph Size tab > Graph Title 51
- Page Tabs tab 15, 20
- Tables tab 34
- Worksheet tab 15, 17, 18, 19, 20

#### Fuel model set selection 79, 80, 103

#### Language 11

- English 93
- Portuguese (Portugal) 93

#### Module 23

#### Module selection 14

- CONTAIN > Options ... > Output Variables tab 67

- Display output distances in map units check box 89

- MORTALITY > Options... 23

- Options... > Input Options tab 11

- Options... > Output Variables tab 11, 24

- Options... > Outputs tab 57

- SIZE > Options ... > Output Variables tab 64

- SURFACE > Options... > Directions tab 57

- SURFACE > Options... > Fuel & Moisture tab 75, 83, 85

- SURFACE > Options... > Outputs tab 61, 76, 88, 90

- SURFACE > Options... > Slope tab 87

#### moisture Scenario set selection 83, 103

#### Table shading for acceptable fire conditions check box 15

#### Units

- Custom 91
- English 91
- Metric 91

## F

### File

- Calculate 14, 31, 102

- New 14, 15, 21, 91, 102

- Open Run 14, 102

- Print 14, 70

- saveAs 102

- Fuel model > BehavePlus format 78

- Fuel model > FARSITE format 82

- Image 71

- Moisture scenario 86

- Results > HTML 72

- Results > Spreadsheet 71

- Run 22

- Worksheet 22

#### Workspaces

- Clone current workspace 13, 101

- New workspace 13, 101

## H

### Help

- Program help 9, 11, 14, 106

## P

- Pages menu 8, 14, 69

## T

### Tools

- Fine dead fuel moisture 95

- Relative humidity 97

- Sun-moon calendar 99

- Units converter 91, 92

- units Editor 91

## V

- View > 69


- View parameters 79

## W

### Windows

- Cascade 70

- Tile 70

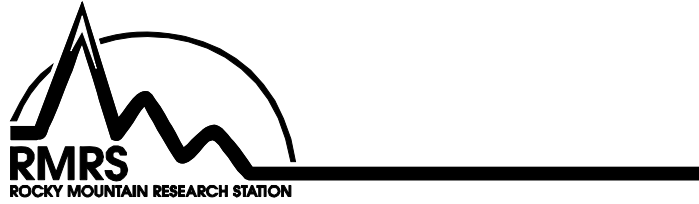

The Rocky Mountain Research Station develops scientific information and technology to improve management, protection, and use of the forests and rangelands. Research is designed to meet the needs of National Forest managers, Federal and State agencies, public and private organizations, academic institutions, industry, and individuals.

Studies accelerate solutions to problems involving ecosystems, range, forests, water, recreation, fire, resource inventory, land reclamation, community sustainability, forest engineering technology, multiple use economics, wildlife and fish habitat, and forest insects and diseases. Studies are conducted cooperatively, and applications may be found worldwide.

## Research Locations

Flagstaff, Arizona  
Fort Collins, Colorado\*  
Boise, Idaho  
Moscow, Idaho  
Bozeman, Montana  
Missoula, Montana  
Lincoln, Nebraska

Reno, Nevada  
Albuquerque, New Mexico  
Rapid City, South Dakota  
Logan, Utah  
Ogden, Utah  
Provo, Utah  
Laramie, Wyoming

\*Station Headquarters, Natural Resources Research Center,  
2150 Centre Avenue, Building A, Fort Collins, CO 80526

The U.S. Department of Agriculture (USDA) prohibits discrimination in all its programs and activities on the basis of race, color, national origin, sex, religion, age, disability, political beliefs, sexual orientation, or marital or family status. (Not all prohibited bases apply to all programs.) Persons with disabilities who require alternative means for communication of program information (Braille, large print, audiotape, etc.) should contact USDA's TARGET Center at (202) 720-2600 (voice and TDD).

To file a complaint of discrimination, write USDA, Director, Office of Civil Rights, Room 326-W, Whitten Building, 1400 Independence Avenue, SW, Washington, DC 20250-9410 or call (202) 720-5964 (voice or TDD). USDA is an equal opportunity provider and employer.